


PRODUCT GUIDE

IMPERIAL

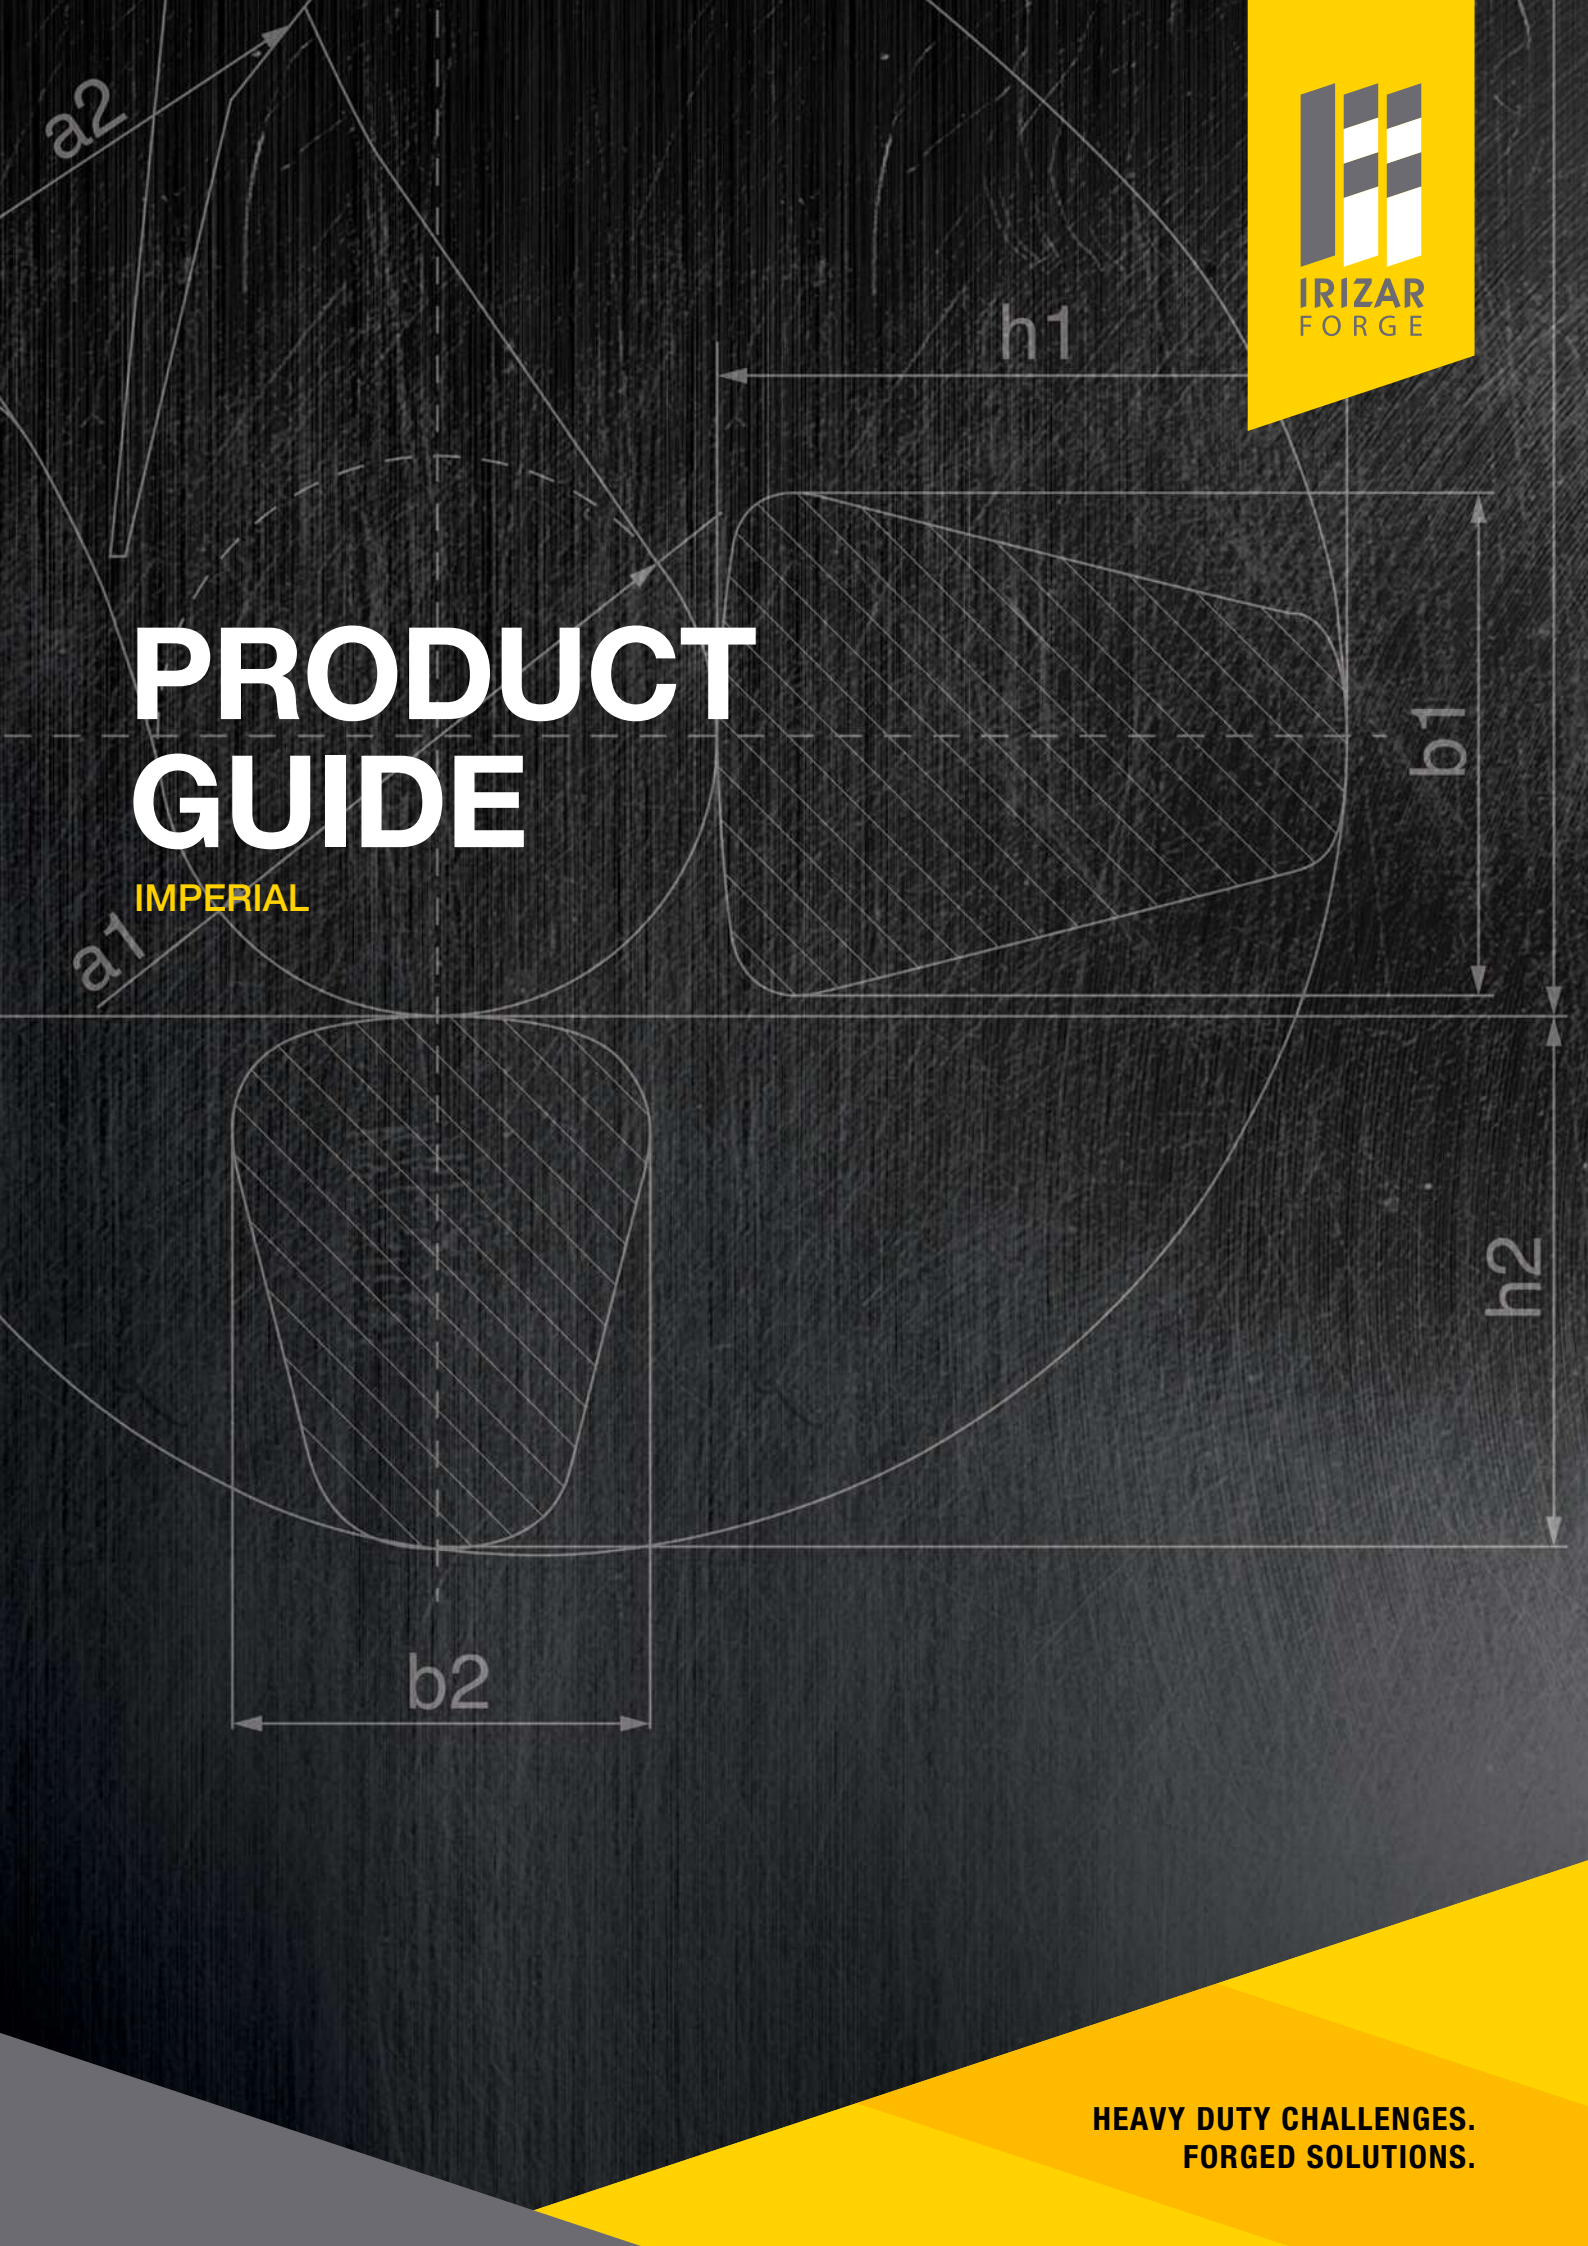

WELCOME TO IRIZAR FORGE

The products presented in this Guide are not pure commodities and can vary depending on customer or site specifications. The purpose of this Guide is to show what Irizar Forge does and can do, as possibilities are multiple: adding or removing accessories, making them longer-shorter, wider, or narrower. We can offer these designs, or we can accommodate them to your specific needs: **design & production flexibility is in our DNA**. To know which products are standardized in our inventories (stock position in Spain, Germany & US) please contact our Sales Department: irizar@irizarforge.com.

The organization where forging comes true. Located in the most industrial powerhouse valley in the Basque Country, Irizar Forge is a young organization only +90 years old with a non stop investment policy in World Class facilities and human team.

4 generations accumulated experience and the young energy is the right combination to lead the Heavy Duty Material Handling Industry.

With activity both in the Onshore and Offshore, where the most critical lifting & mooring operations are held:

- Onshore target industries: Industrial, Hydro, Steel & Aluminium, Paper... for outdoor & indoor cranes.
- Shore target industries: Port & Harbour, Shipyards, Nuclear.
- Offshore target industries: Oil & Gas, Renewables for top site & Subsea appliance.

Focused in heavy duty appliance critical components at abnormal & extreme conditions where long lifetime and high safety factors are required:



- Hooks, rope sheaves and complete crane blocks up to 5.000t SWL for lifting& mooring.
- Additionally other mooring line accesories as Shackles, H-Links, Y-Links, Swivels and Sockets.

NOT LIMITED TO PRODUCTION: Engineering, Manufacturing & Inspection of crane components as well as lifting & mooring accessories is our core business.



COME & DISCOVER: IN FORGE WE TRUST:
YOUR FORGE BOUTIQUE FOR LIFTING & MOORING
CRITICAL COMPONENTS.



► **DESIGN, CALCULATION & SIMULATION** of critical safety related items is the first step to start advising customers interested in latest innovative designs or just replacing an old non forged accessory to a new forged one complying with all relative international rules & standards.

► **PRODUCTION:** After related design approvals production begins heating selected steel.

- **FORGING:** is the main process to achieve safety factors and reduction ratios guaranteeing the many benefits of forging against other processes. Forging facilities are divided into two shops: one for parts up to 11.000 lbs weight and the second for parts up to 44.000 lbs weight.
- **HEAT TREATMENT:** after tensions created in the steel structure, all parts are treated to achieve its final mechanical properties and distress material having as result strong and long lifetime products.
- **SURFACE FREE OF DEFECTS:** non just an aesthetic matter, but small unvisible indications could became a crack in the future failing the part provoking an accident.

► **INSPECTION, TESTING & CERTS:** To guarantee a free of defects supply, DT & NDT inspections are held before, during & after production processes complying with international rules, standards and customer specs & requirements. The key proof is the overload test, having in-site several benches up to 6000t. The company is certified by the most popular classification societies as LRS, DNV-GL, ABS, BV, TUV, for major approvals, type and design approvals.



IRIZAR FORGE PRODUCT RANGE

LIFTING APPLICATIONS (CRANE COMPONENTS)



SHANK HOOKS



EYE HOOKS



HOOK BLOCKS



CUSTOM HOOKS


SUBSEA LIFTING & MOORING APPLICATIONS (OFFSHORE)



ROV HOOKS



SWIVELS & BLOCKS

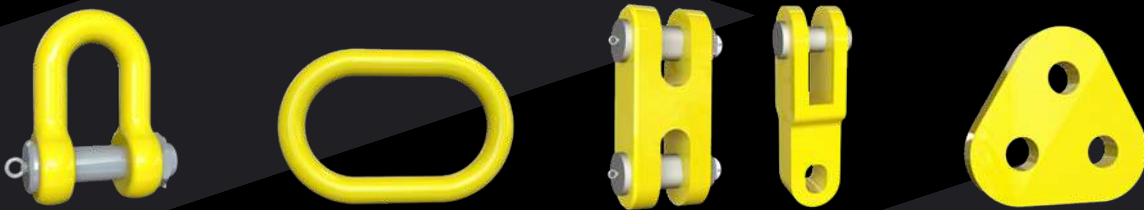

CONNECTORS

BRIEFING

1. What? Lifting & Mooring solutions

- **Key focus:** safety related crane components and subsea lifting & mooring forged accessories.
- **Top products:** Forged hooks, swivel hooks, crane blocks & shackles for lifting appliance, onshore & offshore. Sling friendly ROV hooks, ROV shackles and sling-chain connectors for subsea & mooring appliance.

2. Where? Onshore & Offshore

- **Key focus:** harsh environments.
Onshore (out & indoor): nuclear, hydro, ports, shipyards, civil construction, industrial processing.
Offshore (topside and subsea): oil&gas and renewables.

3. How? Forged

- **Key technology:** forging and weld free solutions.
- **Scope:** design, production, testing & certification.

4. Why? Safer, lighter, longer lifetime

- Irizar top key factors:
Safer.
Lighter.
Longer lifetime.



CAPABILITIES

Irizar Forge

Forging is the main process and the preferred & valued technology to produce key products described in this product guide.

Forging process is achieved in two shops:

SHOP 1: forgings up to 11.023 lbs single weight

Presses up to 3.000t force for close die and open die forging.
Furnaces 8m³ for heating process before forging and normalizing process after forging.
Bending machines up to 11 ¹³/₁₆ inch.



SHOP 2: forgings up to 44092 lbs single weight

Presses up to 10.000t force for close die and open die forging.
Furnaces 20m³ for heating process before forging and normalizing process after forging.
Bending machines up to 19 ²/₃ inch.



Auxiliary processes divided in additional 5 workshops

Flame cutting technology by O₂ for 19²/₃ inch thickness.

Shot blasting & grinding machines to achieve smooth surfaces to guarantee free of defects forgings.

Machining milling & lathes for rough & final machining.

Assembly and painting for turnkey projects and finished products as complete blocks.



Irizar test

This unit of the organization is focused on the Complete Quality Management Assurance of the Product & Organization: **Product Quality Assurance**.

All kind of Tests & Inspections are held in order to comply with most Worldwide International Rules & Standards: DT, NDT & PTL tests are held for a full product guarantee.

PTL, Proof Test Load is the key test, where a physical over load is applied to the product following International rules & standards: three benches are calibrated to operate this key test, being the largest one 6000t bench.

As a consequence product particular type approvals and Company certificates are kept to operate in the internal business being the most populars ABS, DNV-GL, LR and BV.

From Company Qualitification point of view, the Company is certified additionally by TÜV for Quality (ISO9001), Environmental (ISO14001) & HSE (ISO45001) point of view.

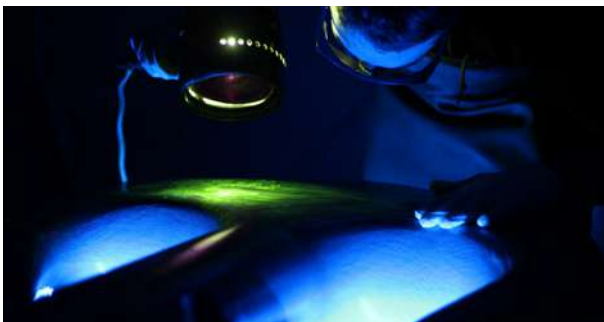


TABLE OF CONTENTS

1	CRANE HOOKS	10
<hr/>		
2	CRANE BLOCKS	40
<hr/>		
3	SUBSEA HOOKS	52
<hr/>		
4	SHACKLES	64
<hr/>		
5	SWIVELS	70
<hr/>		
6	CONNECTORS	74
<hr/>		
7	ROPE ACCESSORIES	78
<hr/>		

1. CRANE HOOKS

Intro

The hook is one of the most critical safety related item of any crane, and its relative cost compared to crane complete cost, makes this component to be the **priority item from safety** point of view. Different industrial technologies and steel grades are used worldwide but the safest and more efficient is the **forging technology**. This is why 100% of Irizar hooks are forged. During the edition of this catalogue all European old national conflicting standards are withdrawn

to be substituted by **EN13001-3-5:2016 new standard**, as the only one harmonized crane shank hook standard in force, together with antecessor ISO17440.

Crane hooks can achieve different mechanical properties depending on the crane purpose and concept design. These properties are **divided in 5 classes** depending on the achievable Yield Point and Tensile Strength as follows:

CLASS	YT (Min. Yield Stress) f_y N/mm ²	US (Min. Ultimate Strength) f_u N/mm ²	FS (Fatigue Strength) $\Delta \sigma_c$ N/mm ²
P	315	490	195
S	390	540	210
T	490	700	250
V	620	800	275
W	770	970	310

These minimum values will be used as design values by the crane manufacturer, being chemical compositions and material grades under manufacturer responsibility to comply with these minimum values.

There are different crane hooks design concepts depending on:

- **Hook shape:** can be symmetrical or asymmetrical but always must work aligned. In case of any misaligned, technical solutions are available on request.
- **Hook section:** can be concave, convex, round or similar depending on the rigging accessories, in order to accommodate the hook seat to the below the hook item.
- **Hook body:** can be single, double/Ramshorn, triton, quadruple. Regularly depends on the loads and volumes of the load and lifting operations.
- **Hook articulation:** can be shank hook, eye hook and fork hook. Regularly shank hooks are fitted with screw nut and crosshead.

All hooks must be load tested at the end of the process to validate the design and guarantee the general integrity. This test must be done to the sole hook as a component and/or together with the crane during the final test loading. Generally speaking, the hook tested as a component is at higher force than the one applied to the crane because the required normative safety factors.

For an unequivocal hook selection based on EN13001-3-5:2016, crane designer must fill the input form (Annex 1) and return fully filled to our Technical Department to assist in the right hook selection. The reason of this is because old Crane Drive Groups classification (Annex 2 DIN15400 Drive Groups) considered operating times (not lifts) and new EN13001 is based on number of work cycles, being more efficient on dynamic calculations and fatigue failures.


Enjoy the Crane Hook range in the following pages.

SHANK HOOKS BASED ON EN13001-3-5:2016

Single forged hooks based on recognized european designs

Single forged hooks based on DIN15401 design

Unmachined

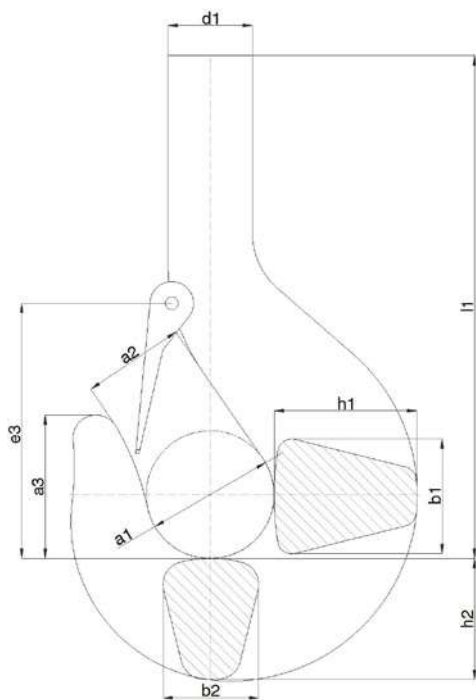


- WLL: from 5t to 2.000t.
- Hook forged and heat treated. Machining recommended to perform by manufacturer.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended after machining.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SINGLE FORGED HOOKS BASED ON DIN15401 DESIGN UNMACHINED											
Overall dimensions (inch)										Weight	
No	a1	a2	a3	b1	b2	d1	e3	h1	h2	l1	lbs
2,5	2 ^{15/32}	1 ^{31/32}	2 ^{27/32}	2 ^{3/32}	1 ^{25/32}	1 ^{21/32}	5 ^{3/16}	2 ^{5/8}	2 ^{9/32}	9 ^{31/32}	14
4	2 ^{25/32}	2 ^{7/32}	3 ^{5/32}	2 ^{15/32}	2 ^{3/32}	1 ^{7/8}	5 ^{13/16}	3 ^{5/32}	2 ^{5/8}	11 ^{7/32}	19
5	3 ^{3/32}	2 ^{15/32}	3 ^{17/32}	2 ^{25/32}	2 ^{3/8}	2 ^{3/32}	6 ^{1/2}	3 ^{17/32}	2 ^{15/16}	12 ^{17/32}	27
6	3 ^{17/32}	2 ^{25/32}	3 ^{31/32}	3 ^{5/32}	2 ^{5/8}	2 ^{3/8}	7 ^{9/32}	3 ^{15/16}	3 ^{11/32}	14 ^{31/32}	38
8	3 ^{15/16}	3 ^{5/32}	4 ^{7/16}	3 ^{17/32}	2 ^{15/16}	2 ^{5/8}	8 ^{9/32}	4 ^{13/32}	3 ^{3/4}	16 ^{15/32}	53
10	4 ^{13/32}	3 ^{17/32}	5	3 ^{15/16}	3 ^{11/32}	2 ^{15/16}	8 ^{11/16}	4 ^{29/32}	4 ^{3/16}	18 ^{1/8}	88
12	4 ^{29/32}	3 ^{15/16}	5 ^{5/8}	4 ^{13/32}	3 ^{3/4}	3 ^{11/32}	9 ^{29/32}	5 ^{1/2}	4 ^{21/32}	20 ^{21/32}	121
16	5 ^{1/2}	4 ^{13/32}	6 ^{5/16}	4 ^{29/32}	4 ^{3/16}	3 ^{3/4}	11 ^{1/32}	6 ^{5/16}	5 ^{3/16}	23 ^{7/16}	170
20	6 ^{5/16}	4 ^{29/32}	7 ^{3/32}	5 ^{1/2}	4 ^{21/32}	4 ^{3/16}	13	7 ^{3/32}	5 ^{29/32}	26 ^{3/16}	247
25	7 ^{3/32}	5 ^{1/2}	7 ^{15/16}	6 ^{5/16}	5 ^{3/16}	4 ^{21/32}	14 ^{3/16}	7 ^{7/8}	6 ^{11/16}	28 ^{15/16}	353
32	7 ^{7/8}	6 ^{5/16}	8 ^{27/32}	7 ^{3/32}	5 ^{29/32}	5 ^{3/16}	15 ^{3/4}	8 ^{13/16}	7 ^{15/32}	31 ^{7/8}	485
40	8 ^{13/16}	7 ^{3/32}	9 ^{29/32}	7 ^{7/8}	6 ^{11/16}	5 ^{29/32}	17 ^{19/32}	9 ^{27/32}	8 ^{11/32}	35 ^{5/8}	683
50	9 ^{27/32}	7 ^{7/8}	11 ^{7/32}	8 ^{13/16}	7 ^{15/32}	6 ^{11/16}	19 ^{3/32}	11 ^{1/32}	9 ^{9/32}	38 ^{31/32}	948
63	11 ^{1/32}	8 ^{13/16}	12 ^{19/32}	9 ^{27/32}	8 ^{11/32}	7 ^{15/32}	21 ^{21/32}	12 ^{13/32}	10 ^{7/16}	44 ^{3/32}	1323
80	12 ^{13/32}	9 ^{27/32}	14 ^{3/32}	11 ^{1/32}	9 ^{9/32}	8 ^{11/32}	23 ^{17/32}	13 ^{31/32}	11 ^{13/16}	50	1896
100	13 ^{31/32}	11 ^{1/32}	15 ^{13/16}	12 ^{13/32}	10 ^{7/16}	9 ^{9/32}	27 ^{3/32}	15 ^{3/4}	13 ^{3/16}	55 ^{23/32}	2690
125	15 ^{3/4}	12 ^{13/32}	17 ^{23/32}	13 ^{31/32}	11 ^{13/16}	10 ^{7/16}	29 ^{17/32}	17 ^{23/32}	14 ^{3/4}	62 ^{19/32}	3836
160	17 ^{23/32}	13 ^{31/32}	19 ^{7/8}	15 ^{3/4}	13 ^{3/16}	11 ^{13/16}	32 ^{15/32}	19 ^{11/16}	16 ^{23/32}	70 ^{15/32}	5467
200	19 ^{11/16}	15 ^{3/4}	22 ^{1/4}	17 ^{23/32}	14 ^{3/4}	13 ^{3/16}	35 ^{7/16}	22 ^{1/16}	18 ^{11/16}	80 ^{5/8}	7540
250	22 ^{1/16}	17 ^{23/32}	25	19 ^{11/16}	16 ^{23/32}	14 ^{3/4}	38 ^{19/32}	24 ^{13/16}	20 ^{7/8}	90 ^{3/4}	10582
320	24 ^{13/16}	19 ^{11/16}	28 ^{5/32}	22 ^{1/16}	18 ^{11/16}	16 ^{23/32}	42 ^{17/32}	27 ^{15/16}	22 ^{27/32}	102 ^{9/16}	14925
400	27 ^{15/16}	22 ^{1/16}	29 ^{23/32}	24 ^{13/16}	20 ^{7/8}	18 ^{11/16}	47 ^{1/16}	31 ^{1/2}	24 ^{13/16}	116 ^{5/32}	20734

Tolerances: forging tolerance acc. to DIN15401.
 Modifications: Shank length (L). Further dimensions upon request.

SHANK HOOKS BASED ON EN13001-3-5:2016

Single forged hooks based on recognized european designs
 Single forged hooks based on DIN15401 design
 Machined fitted with nut

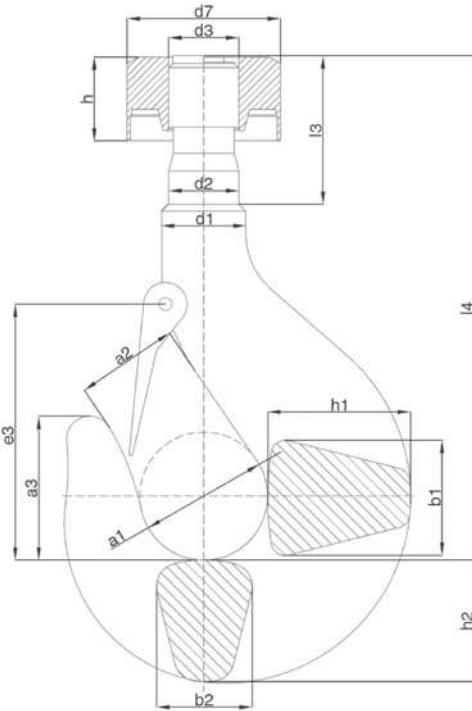


- WLL: from 5t to 2.000t.
- Hook and Nut forged, heat treated and thread fully machined as per DIN15403 design.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SINGLE FORGED HOOKS BASED ON DIN15401 DESIGN MACHINED FITTED WITH NUT																	
Overall dimensions (inch)														DIN15413 Nut		Weight	
No	a1	a2	a3	b1	b2	d1	e3	h1	h2	d2	h11	d3	l3	l4	d7	h	lbs
2,5	2 19/32	2 1/16	2 15/16	2 3/16	1 27/32	1 23/32	5 13/32	2 3/4	2 3/8	1 15/32	M36	3 13/32	10 1/4	2 7/8	1 13/16	16	
4	2 29/32	2 9/32	3 9/32	2 19/32	2 3/16	1 31/32	6 1/16	3 9/32	2 3/4	1 23/32	M42	3 13/16	11 17/32	3 9/32	2	23	
5	3 9/32	2 19/32	3 11/16	2 29/32	2 15/32	2 3/16	6 3/4	3 11/16	3 1/16	1 27/32	M45	4 7/32	12 7/8	3 29/32	2 9/32	32	
6	3 11/16	2 29/32	4 1/8	3 9/32	2 3/4	2 15/32	7 19/32	4 3/32	3 15/32	2 1/16	Rd50x6	4 19/32	15 3/8	4 23/32	2 15/32	46	
8	4 3/32	3 9/32	4 5/8	3 11/16	3 1/16	2 3/4	8 19/32	4 19/32	3 29/32	2 9/32	Rd56x6	5	16 15/16	5 1/8	2 3/4	63	
10	4 19/32	3 11/16	5 7/32	4 3/32	3 15/32	3 1/16	9 1/16	5 1/8	4 11/32	2 5/8	Rd64x8	5 17/32	18 9/32	5 15/16	3 1/8	90	
12	5 1/8	4 3/32	5 7/8	4 19/32	3 29/32	3 15/32	10 5/16	5 3/4	4 27/32	2 15/16	Rd72x8	6 7/16	20 11/16	6 3/4	3 9/16	144	
16	5 3/4	4 19/32	6 9/16	5 1/8	4 11/32	3 29/32	11 15/32	6 9/16	5 13/32	3 9/32	Rd80x10	6 31/32	23 19/32	7 3/16	3 23/32	198	
20	6 9/16	5 1/8	7 7/8	5 3/4	4 27/32	4 11/32	13 17/32	7 3/8	6 5/32	3 11/16	Rd90x10	7 21/32	26 7/16	7 19/32	4 3/16	287	
25	7 3/8	5 3/4	8 9/32	6 9/16	5 13/32	4 27/32	14 3/4	8 3/16	6 31/32	4 3/32	Rd100x12	8 15/32	29 11/32	8 13/32	4 5/8	406	
32	8 3/16	6 9/16	9 7/32	7 3/8	6 5/32	5 13/32	16 13/32	9 3/16	7 25/32	4 1/2	Rd110x12	9 1/2	32 9/32	9 27/32	5 3/8	560	
40	9 3/16	7 3/8	10 5/16	8 3/16	6 31/32	6 5/32	18 5/16	10 1/4	8 11/16	5 1/8	Rd125x14	10 17/32	36 9/32	11 1/16	5 29/32	796	
50	10 1/4	8 3/16	11 11/16	9 3/16	7 25/32	6 31/32	19 7/8	11 15/32	9 11/16	5 3/4	Rd140x16	11 15/32	39 23/32	13 3/8	6 9/32	1107	
63	11 15/32	9 3/16	13 1/8	10 1/4	8 11/16	7 25/32	22 17/32	12 29/32	10 7/8	6 9/16	Rd160x18	13 3/16	45 3/32	14 3/4	7 13/32	1543	
80	12 29/32	10 1/4	14 11/16	11 15/32	9 11/16	8 11/16	24 1/2	14 9/16	12 9/32	7 3/8	Rd180x20	14 5/8	51 1/32	16 13/32	8 1/8	2220	
100	14 9/16	11 15/32	16 15/32	12 29/32	14 31/32	9 11/16	28 3/16	16 13/32	13 23/32	8 3/16	Rd200x22	16 15/32	56 7/8	18 1/4	9 11/32	3124	
125	16 13/32	12 29/32	18 7/16	14 9/16	12 9/32	10 7/8	30 3/4	18 7/16	15 3/8	9 7/32	Rd225x24	19 1/16	64 1/8	20 3/32	10 3/32	4467	
160	18 7/16	14 9/16	20 11/16	16 13/32	13 23/32	12 9/32	33 13/16	20 1/2	17 13/32	10 1/4	Rd250x28	20 29/32	72 3/16	21 23/32	11 7/32	6274	
200	20 1/2	16 13/32	23 5/32	18 7/16	15 3/8	13 23/32	36 7/8	22 15/16	19 15/32	11 15/32	Rd280x32	25 1/8	82 15/32	24 3/16	14 1/16	8514	
250	22 15/16	18 7/16	26 1/32	20 1/2	17 13/32	15 3/8	40 5/32	25 13/16	21 23/32	13 1/8	Rd320x36	28 9/32	93 1/8	27 7/8	15 11/16	11929	
320	25 13/16	20 1/2	29 5/16	22 15/16	19 15/32	17 13/32	44 1/4	29 3/32	23 25/32	15 5/32	Rd360x36	31 31/32	105 1/8	31 5/32	17 3/4	16799	
400	29 3/32	22 15/16	30 15/16	25 13/16	21 23/32	19 15/32	48 31/32	32 25/32	25 13/16	16 11/32	Rd400x36	35 7/8	117 15/16	35 7/16	19 3/4	23018	

Tolerances: forging tolerance acc. to DIN15401. Machining tolerances as per DIN15403.
 Modifications: Shank length (L). Further dimensions upon request.

SHANK HOOKS BASED ON EN13001-3-5:2016

Single forged hooks based on recognized european designs
 Single forged hooks based on DIN15401 design
 Machined fitted with nut, crosshead and bearing

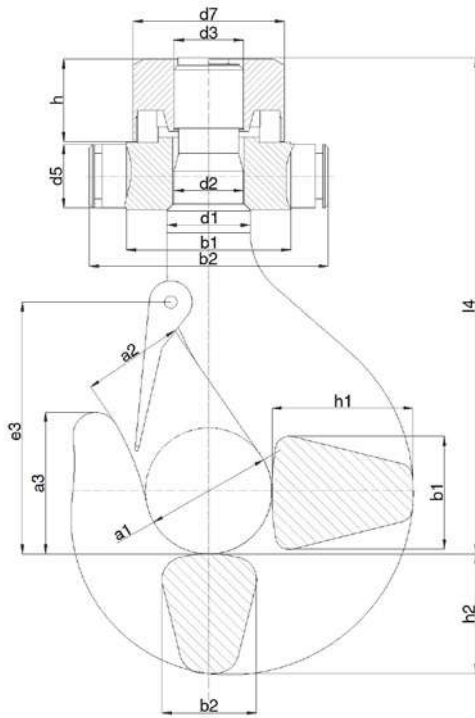


- WLL: from 5t to 2.000t.
- Hook, Nut and Crosshead forged, heat treated and thread fully machined as per DIN15403 design.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SINGLE FORGED HOOKS BASED ON DIN15401 DESIGN MACHINED FITTED WITH NUT																		
Overall dimensions (inch)													DIN15412 Crosshead		DIN15413 Nut		Weight	
No	a1	a2	a3	b1	b2	d1	e3	h1	h2	d2 h11	d3	l4	b1	b2	d5 h9	d7	h	lbs
2,5	2 15/32	1 15/16	2 13/16	2 1/16	1 3/4	1 5/8	5 3/16	2 5/8	2 9/32	1 13/32	M36	9 13/16	3 1/8	4 29/32	1 5/32	2 3/4	1 23/32	20
4	2 25/32	2 3/16	3 1/8	2 15/32	2 1/16	1 7/8	5 13/16	3 1/8	2 5/8	1 5/8	M42	11 1/16	3 17/32	5 1/2	1 9/8	3 1/8	1 29/32	29
5	3 1/8	2 15/32	3 17/32	2 25/32	2 11/32	2 1/16	6 15/32	3 17/32	2 15/16	1 3/4	M45	12 3/8	3 29/32	6 3/32	1 9/16	3 23/32	2 3/16	41
6	3 17/32	2 25/32	3 31/32	3 1/8	2 5/8	2 11/32	7 9/32	3 29/32	3 11/32	1 15/16	Rd50x6	14 3/4	4 29/32	7 9/32	1 3/4	4 1/2	2 11/32	60
8	3 29/32	3 1/8	4 7/16	3 17/32	2 15/16	2 5/8	8 1/4	4 13/32	3 23/32	2 3/16	Rd56x6	16 1/4	5 1/2	8 1/4	1 15/16	4 29/32	2 5/8	84
10	4 13/32	3 17/32	5	3 29/32	3 11/32	2 15/16	8 11/16	4 29/32	4 5/32	2 1/2	Rd64x8	17 17/32	6 9/32	9 1/32	2 5/32	5 11/16	2 31/32	120
12	4 29/32	3 29/32	5 5/8	4 13/32	3 23/32	3 11/32	9 29/32	5 1/2	4 5/8	2 13/16	Rd72x8	19 27/32	7 1/16	10 13/32	2 11/32	6 15/32	3 13/32	188
16	5 1/2	4 13/32	6 9/32	4 29/32	4 5/32	3 23/32	11	6 9/32	5 3/16	3 1/8	Rd80x10	22 21/32	7 15/32	10 13/16	2 3/4	6 7/8	3 9/16	252
20	6 9/32	4 29/32	7 1/16	5 1/2	4 5/8	4 5/32	12 31/32	7 1/16	5 7/8	3 17/32	Rd90x10	25 3/8	7 27/32	11 19/32	3 1/8	7 9/32	4	349
25	7 1/16	5 1/2	7 15/16	6 9/32	5 3/16	4 5/8	14 5/32	7 27/32	6 11/16	3 29/32	Rd100x12	28 3/16	8 21/32	12 1/2	3 17/32	8 1/16	4 7/16	491
32	7 27/32	6 9/32	8 27/32	7 1/16	5 7/8	5 3/16	15 23/32	8 13/16	7 15/32	4 5/16	Rd110x12	31	10 7/32	14 7/8	3 29/32	9 7/16	5 5/32	694
40	8 13/16	7 1/16	9 29/32	7 27/32	6 11/16	5 7/8	17 19/32	9 13/16	8 11/32	4 29/32	Rd125x14	34 13/16	11 7/32	16 5/16	4 5/16	10 5/8	5 21/32	977
50	9 13/16	7 27/32	11 7/32	8 13/16	7 15/32	6 11/16	19 9/32	11	9 9/32	5 1/2	Rd140x16	38 1/8	13 3/16	18 9/32	4 29/32	12 19/32	6	1389
63	11	8 13/16	12 19/32	9 13/16	8 11/32	7 15/32	21 5/8	12 3/8	10 13/32	6 9/32	Rd160x18	43 9/32	14 15/16	20 17/32	5 1/2	14 5/32	7 1/8	1951
80	12 3/8	9 13/16	14 3/32	11	9 9/32	8 11/32	23 17/32	13 31/32	11 25/32	7 1/16	Rd180x20	49	16 17/32	22 7/32	6 9/32	15 23/32	7 25/32	2765
100	13 3/32	11	15 13/16	12 3/8	14 11/32	9 9/32	27 1/16	15 23/32	13 31/32	7 27/32	Rd200x22	54 5/8	18 1/2	25 3/8	7 1/16	17 1/2	8 31/32	3898
125	15 23/32	12 3/8	17 11/16	13 31/32	11 25/32	10 13/32	29 1/2	17 11/16	14 3/4	8 27/32	Rd225x24	61 19/32	20 1/16	26 15/16	7 27/32	19 9/32	9 21/32	5492
160	17 11/16	13 31/32	19 7/8	15 23/32	13 31/16	11 25/32	32 15/32	19 21/32	16 23/32	9 13/16	Rd250x28	69 5/16	21 5/8	29 1/2	8 21/32	20 27/32	10 25/32	7679
200	19 21/32	15 23/32	22 7/32	17 11/16	14 3/4	13 31/16	35 13/32	22 1/32	18 11/16	11	Rd280x32	79 3/16	24	31 7/8	9 7/16	23 3/32	13 1/2	10562
250	22 1/32	17 11/16	25	19 21/32	16 23/32	14 3/4	38 9/16	24 25/32	20 27/32	12 19/32	Rd320x36	89 7/16	27 17/32	36 7/32	10 7/32	26 3/4	15 1/16	14976
320	24 25/32	19 21/32	28 1/8	22 1/32	18 11/16	16 23/32	42 1/2	27 15/16	22 13/16	14 9/16	Rd360x36	100 31/32	31 3/32	40 17/32	11	29 29/32	17 1/32	20818
400	27 15/16	22 1/32	29 23/32	24 25/32	20 27/32	18 11/16	47 1/32	31 15/32	24 25/32	16 5/16	Rd400x36	113 9/32	35 7/32	45 1/16	11 25/32	34 1/32	18 31/32	29145

Tolerances: forging tolerance acc. to DIN15401. Machining tolerances as per DIN15403.
 Modifications: Shank length (L). Further dimensions upon request.

SHANK HOOKS BASED ON EN13001-3-5:2016

Single forged hooks based on recognized european designs Single forged hooks based on BS2903:1980 design Unmachined

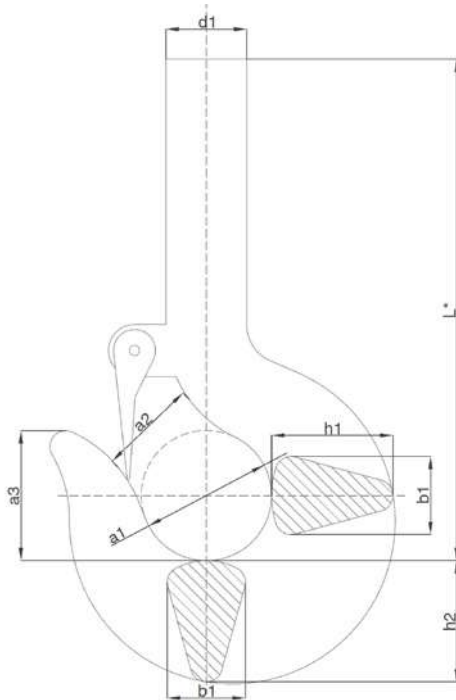

- WLL: from 5t to 250t.
- Hook forged and heat treated. Machining recommended to perform by manufacturer.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended after machining.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SINGLE FORGED HOOKS BASED ON BS2903:1980 DESIGN UNMACHINED									
Overall dimensions (inch)									Weight
No	a1	a2	a3	b1	d1	h1	h2	L*	lbs
B5	2 ¹⁷ / ₃₂	1 ²⁹ / ₃₂	2 ¹⁷ / ₃₂	1 ¹⁷ / ₃₂	1 ¹⁵ / ₃₂	2 ¹¹ / ₃₂	2 ¹¹ / ₃₂	9 ¹⁵ / ₁₆	11
B6,3	2 ²⁷ / ₃₂	2 ⁵ / ₃₂	2 ²⁷ / ₃₂	1 ²³ / ₃₂	1 ²³ / ₃₂	2 ²¹ / ₃₂	2 ²¹ / ₃₂	11 ⁷ / ₃₂	14
B8	3 ¹ / ₄	2 ⁷ / ₁₆	3 ⁹ / ₃₂	1 ¹⁵ / ₁₆	1 ¹⁵ / ₁₆	3 ¹ / ₃₂	3 ¹ / ₃₂	12 ¹ / ₂	22
B10	3 ¹⁹ / ₃₂	2 ¹¹ / ₁₆	3 ¹⁹ / ₃₂	2 ⁵ / ₃₂	2 ⁵ / ₃₂	3 ³ / ₈	3 ³ / ₈	14 ¹⁵ / ₁₆	31
B12,5	4 ¹ / ₃₂	3 ¹ / ₃₂	4 ³ / ₃₂	2 ⁷ / ₁₆	2 ¹¹ / ₃₂	3 ³ / ₄	3 ³ / ₄	16 ⁷ / ₁₆	42
B16	4 ¹⁹ / ₃₂	3 ⁷ / ₁₆	4 ¹⁹ / ₃₂	2 ³ / ₄	2 ¹⁷ / ₃₂	4 ⁹ / ₃₂	4 ⁹ / ₃₂	17 ²⁵ / ₃₂	60
B20	5 ⁵ / ₃₂	3 ²⁷ / ₃₂	5 ³ / ₁₆	3 ³ / ₃₂	2 ¹⁵ / ₁₆	4 ²⁵ / ₃₂	4 ²⁵ / ₃₂	20 ¹ / ₁₆	84
B25	5 ²³ / ₃₂	4 ⁵ / ₁₆	5 ²³ / ₃₂	3 ⁷ / ₁₆	3 ¹¹ / ₃₂	5 ¹¹ / ₃₂	5 ¹¹ / ₃₂	22 ²⁹ / ₃₂	117
B32	6 ¹ / ₄	4 ²¹ / ₃₂	6 ⁹ / ₃₂	3 ²³ / ₃₂	3 ¹⁷ / ₃₂	5 ¹³ / ₁₆	5 ¹³ / ₁₆	25 ¹¹ / ₁₆	152
B40	6 ²⁵ / ₃₂	5 ³ / ₃₂	6 ²⁵ / ₃₂	4 ³ / ₃₂	4 ¹ / ₈	6 ⁵ / ₁₆	6 ⁵ / ₁₆	28 ¹ / ₂	201
B50	7 ¹ / ₂	5 ⁵ / ₈	7 ¹ / ₂	4 ¹ / ₂	4 ¹ / ₂	7	7	31 ⁵ / ₁₆	267
B63	8 ¹ / ₁₆	6 ¹ / ₁₆	8 ¹ / ₁₆	4 ¹³ / ₁₆	4 ²⁹ / ₃₂	7 ¹ / ₂	7 ¹ / ₂	31 ⁵ / ₁₆	340

Tolerances: -0/+7% forging tolerance.


Modifications: Shank length (L). Further dimensions upon request.

SHANK HOOKS BASED ON EN13001-3-5:2016

Single forged hooks based on recognized european designs

Single forged hooks based on BS2903:1980 design

Machined fitted with nut, crosshead and bearing

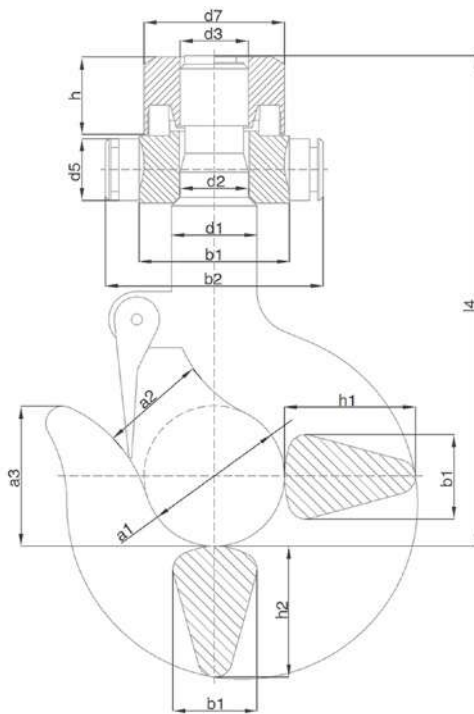


- WLL: from 5t to 250t.
- Hook, Nut and Crosshead forged, heat treated and thread fully machined as per DIN15403 design.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SINGLE FORGED HOOKS BASED ON DIN15401 DESIGN MACHINED FITTED WITH NUT, CROSSHEAD AND BEARING																
Overall dimensions (inch)										DIN15412 Crosshead		DIN15413 Nut		Weight		
No	a1	a2	a3	b1	d1	h1	h2	d2 h11	d3	l4	b1	b2	d5 h9	d7	h	lbs
B5	2 17/32	1 29/32	2 17/32	1 17/32	1 15/32	2 11/32	2 11/32	1 5/32	M30	8 11/16	2 17/32	3 29/32	3 1/2	2 11/32	1 15/32	13
B6,3	2 27/32	2 5/32	2 27/32	1 23/32	1 23/32	2 21/32	2 21/32	1 13/32	M36	9 13/16	3 1/8	4 29/32	1 5/32	2 3/4	1 23/32	19
B8	3 1/4	2 7/16	3 9/32	1 15/16	1 15/16	3 1/32	3 1/32	1 5/8	M42	11 1/16	3 17/32	5 1/2	1 3/8	3 1/8	1 29/32	28
B10	3 19/32	2 11/16	3 19/32	2 5/32	2 5/32	3 3/8	3 3/8	1 3/4	M45	12 3/8	3 29/32	6 3/32	1 9/16	3 23/32	2 3/16	39
B12,5	4 1/32	3 1/32	4 3/32	2 7/16	2 11/32	3 3/4	3 3/4	1 15/16	Rd50x6	14 3/4	4 29/32	7 9/32	1 3/4	4 1/2	2 11/32	55
B16	4 19/32	3 7/16	4 19/32	2 3/4	2 17/32	4 9/32	4 9/32	1 15/16	Rd50x6	14 3/4	4 29/32	7 9/32	1 3/4	4 1/2	2 11/32	73
B20	5 5/32	3 27/32	5 3/16	3 3/32	2 15/16	4 25/32	4 25/32	2 1/2	Rd64x8	17 17/32	6 9/32	9 1/32	2 5/32	5 11/16	2 31/32	110
B25	5 23/32	4 5/16	5 23/32	3 7/16	3 11/32	5 11/32	5 11/32	2 13/16	Rd72x8	19 27/32	7 1/16	10 13/32	2 11/32	6 15/32	3 13/32	157
B32	6 1/4	4 21/32	6 9/32	3 23/32	3 17/32	5 13/16	5 13/16	2 13/16	Rd72x8	19 27/32	7 1/16	10 13/32	2 11/32	6 15/32	3 13/32	192
B40	6 25/32	5 3/32	6 25/32	4 3/32	4 1/8	6 5/16	6 5/16	3 1/8	Rd80x10	22 21/32	7 15/32	10 13/16	2 3/4	6 7/8	3 9/16	249
B50	7 1/2	5 5/8	7 1/2	4 1/2	4 1/2	7	7	3 17/32	Rd90x10	25 3/8	7 27/32	11 19/32	3 1/8	7 9/32	4	324
B63	8 1/16	6 1/16	8 1/16	4 13/16	4 29/32	7 1/2	7 1/2	3 29/32	Rd100x12	28 3/16	8 21/32	12 1/2	3 17/32	8 1/16	4 7/16	417

Tolerances: -0/+7% forging tolerance. Machining tolerances as per DIN15403.
Modifications: Shank length (L). Further dimensions upon request.

SHANK HOOKS BASED ON EN13001-3-5:2016

Ramshorn forged hooks based on recognized european standards Ramshorn forged hooks based on DIN15402 design Unmachined

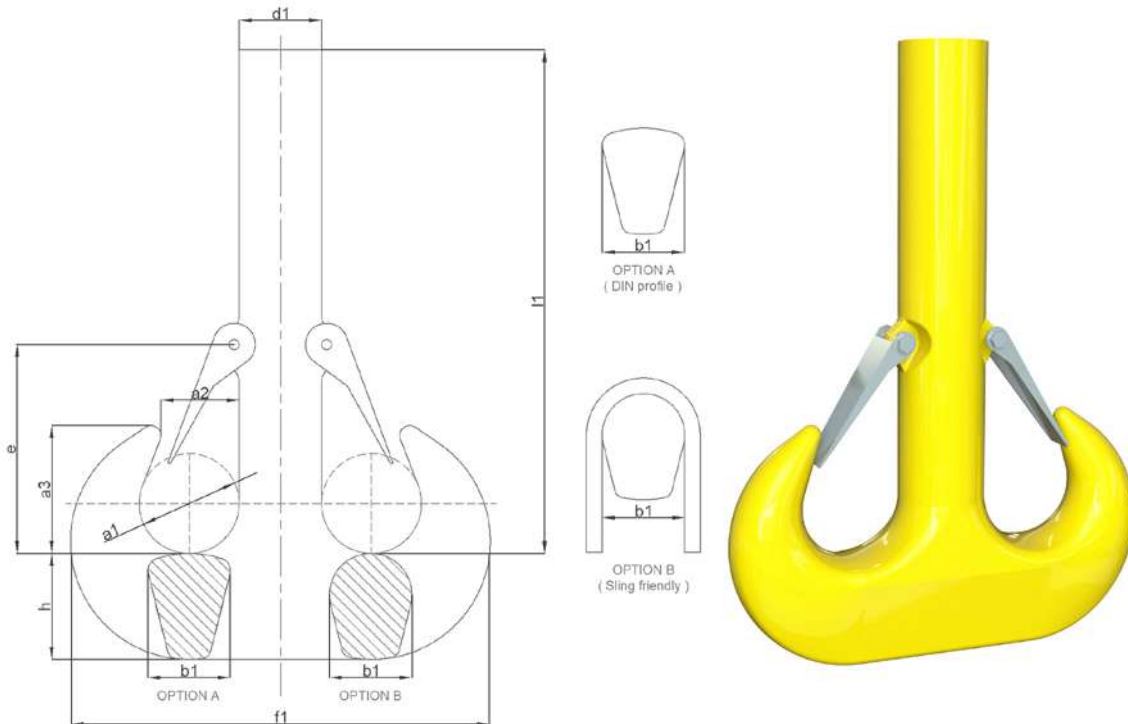


- WLL: from 5t to 2.000t.
- Hook forged and heat treated. Machining recommended to perform by manufacturer.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended after machining.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

RAMSHORN FORGED HOOKS BASED ON DIN15402 DESIGN UNMACHINED										
Overall dimensions (inch)										Weight
No	a1	a2	a3	b1	d1	e	f1	h	l1	lbs
2,5	1 15/16	1 9/16	2 17/32	1 9/16	1 5/8	4 13/32	8 3/16	1 15/16	9 13/16	15
4	2 3/16	1 3/4	2 27/32	1 7/8	1 7/8	4 7/8	9 11/32	2 11/32	11	21
5	2 15/32	1 15/16	3 7/32	2 1/16	2 1/16	5 5/8	10 15/32	2 5/8	12 9/32	30
6	2 25/32	2 3/16	3 19/32	2 11/32	2 11/32	6 9/32	11 21/32	2 15/16	14 3/4	37
8	3 1/8	2 15/32	4 1/32	2 5/8	2 5/8	7 5/32	13 1/4	3 11/32	16 5/16	56
10	3 17/32	2 25/32	4 9/16	2 15/16	2 15/16	7 17/32	14 13/16	3 23/32	17 11/16	80
12	3 29/32	3 1/8	5 3/32	3 11/32	3 11/32	8 1/4	16 9/16	4 5/32	20 1/16	111
16	4 13/32	3 17/32	5 23/32	3 23/32	3 23/32	9 5/16	18 17/32	4 5/8	22 13/16	157
20	4 29/32	3 29/32	6 13/32	4 5/32	4 5/32	10 13/32	20 7/8	5 3/16	25 9/16	219
25	5 1/2	4 13/32	7 5/32	4 5/8	4 5/8	12 3/8	23 17/32	5 7/8	28 1/8	304
32	6 9/32	4 29/32	8 1/16	5 3/16	5 3/16	13 3/16	26 7/16	6 11/16	31 3/32	434
40	7 1/16	5 1/2	9 1/32	5 7/8	5 7/8	14 3/4	29 21/32	7 15/32	34 13/16	631
50	7 27/32	6 9/32	10 7/32	6 11/16	6 11/16	16 11/32	33 1/8	8 11/32	37 31/32	869
63	8 13/16	7 1/16	11 15/32	7 15/32	7 15/32	18 3/32	37 5/32	9 9/32	42 29/32	1206
80	9 13/16	7 27/32	12 25/32	8 11/32	8 11/32	20 1/4	41 25/32	10 13/32	48 19/32	1673
100	11	8 13/16	14 5/16	9 9/32	9 9/32	22 3/8	46 11/16	11 25/32	54 1/8	2337
125	12 3/8	9 13/16	16 1/16	10 13/32	10 13/32	25 3/8	52 11/32	13 3/16	61	3287
160	13 31/32	11	18 1/32	11 25/32	11 25/32	28 17/32	59 1/4	14 3/4	68 11/16	4663
200	15 23/32	12 3/8	20 1/4	13 3/16	13 3/16	31 15/32	66 5/16	16 23/32	78 21/32	6647
250	17 11/16	13 31/32	22 13/16	14 3/4	14 3/4	34 7/16	74 3/16	18 11/16	88 9/16	9409
320	19 21/32	15 23/32	25 9/16	16 23/32	16 23/32	37 3/8	83 21/32	20 27/32	100 3/8	13267
400	22 1/32	17 11/16	28 23/32	18 11/16	18 11/16	41 1/8	93 1/2	23 19/32	113 31/32	18907

Tolerances: forging tolerance acc. to DIN15402.
 Modifications: Shank length (L). Further dimensions upon request.
 Hook section: RSN up to No 10 and greater sizes RFN. For the largest hooks, other sections b1xH can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Ramshorn forged hooks based on recognized european standards
 Ramshorn forged hooks based on DIN15402 design
Machined fitted with nut

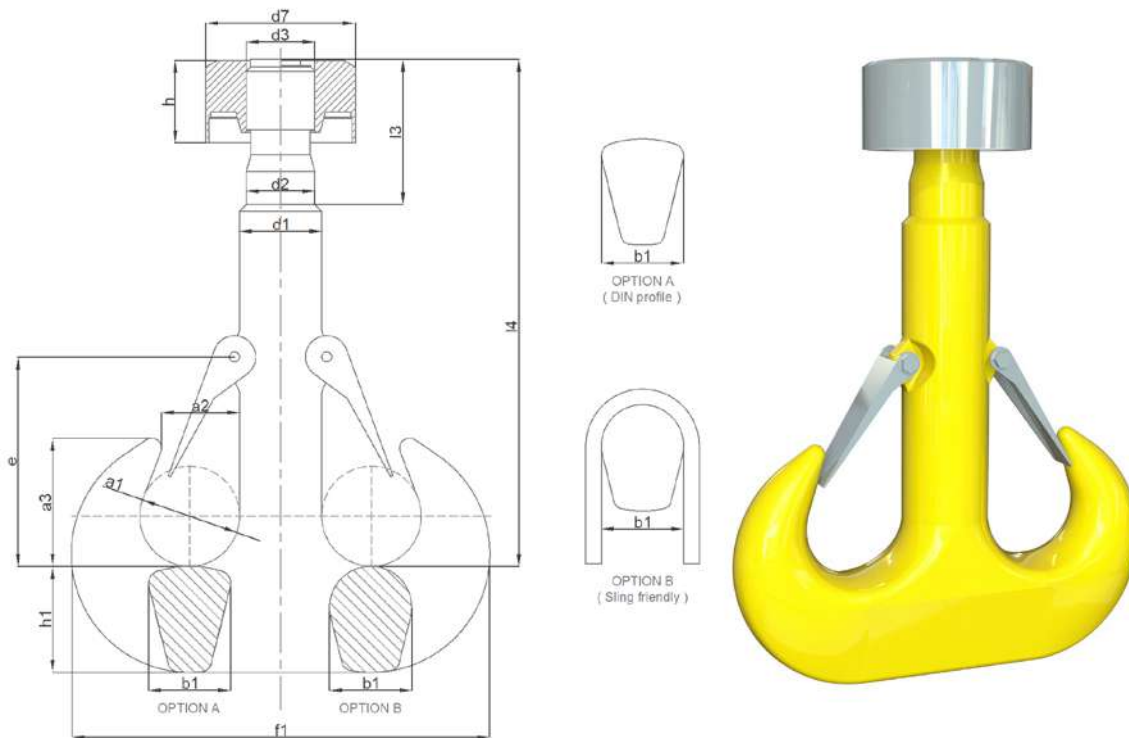


- WLL: from 5t to 2.000t.
- Hook and Nut forged, heat treated and thread fully machined as per DIN15403 design.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SINGLE FORGED HOOKS BASED ON DIN15401 DESIGN MACHINED FITTED WITH NUT																
Overall dimensions (inch)													DIN15413 Nut		Weight	
No	a1	a2	a3	b1	d1	e	f1	h1	d2	h11	d3	l3	l4	d7	h	lbs
2,5	1 15/16	1 9/16	2 17/32	1 9/16	1 5/8	4 13/32	8 3/16	1 15/16	1 13/32	M36	3 1/4	9 9/16	2 3/4	1 23/32	17	
4	2 3/16	1 3/4	2 27/32	1 7/8	1 7/8	4 1/8	9 11/32	2 11/32	1 5/8	M42	3 21/32	10 25/32	3 1/8	1 29/32	23	
5	2 15/32	1 15/16	3 7/32	2 1/16	2 1/16	5 5/8	10 15/32	2 5/8	1 3/4	M45	4 1/32	12 1/32	3 23/32	2 3/16	32	
6	2 25/32	2 3/16	3 19/32	2 1/32	2 11/32	6 9/32	11 27/32	2 15/16	1 15/16	Rd50x6	4 13/32	14 3/8	4 1/2	2 11/32	45	
8	3 1/8	2 15/32	4 1/32	2 5/8	2 5/8	7 5/32	13 1/4	3 11/32	2 3/16	Rd56x6	4 25/32	15 27/32	4 29/32	2 5/8	67	
10	3 17/32	2 25/32	4 9/16	2 15/16	2 15/16	7 17/32	14 13/16	3 23/32	2 1/2	Rd64x8	5 5/16	17 1/8	5 11/16	2 31/32	95	
12	3 29/32	3 1/8	5 3/32	3 11/32	3 11/32	8 1/4	16 9/16	4 5/32	2 13/16	Rd72x8	6 5/32	19 11/32	6 15/32	3 13/32	134	
16	4 13/32	3 17/32	5 23/32	3 23/32	3 23/32	9 5/16	18 17/32	4 5/8	3 1/8	Rd80x10	6 11/16	22 1/8	6 7/8	3 9/16	185	
20	4 29/32	3 29/32	6 13/32	4 5/32	4 5/32	10 13/32	20 7/8	5 3/16	3 17/32	Rd90x10	7 11/32	24 23/32	7 9/32	4	258	
25	5 1/2	4 13/32	7 5/32	4 5/8	4 5/8	12 3/8	23 17/32	5 7/8	3 29/32	Rd100x12	8 1/8	27 3/8	8 1/16	4 7/16	355	
32	6 9/32	4 29/32	8 1/16	5 3/16	5 3/16	13 3/16	26 7/16	6 11/16	4 5/16	Rd110x12	9 1/8	30 7/32	9 7/16	5 5/32	507	
40	7 1/16	5 1/2	9 1/32	5 7/8	5 7/8	14 3/4	29 27/32	7 15/32	4 29/32	Rd125x14	10 3/32	33 31/32	10 5/8	5 21/32	741	
50	7 27/32	6 9/32	10 7/32	6 11/16	6 11/16	16 17/32	33 1/8	8 11/32	5 1/2	Rd140x16	11	37 3/32	12 19/32	6	1023	
63	8 13/16	7 1/16	11 15/32	7 15/32	7 15/32	18 3/32	37 5/32	9 9/32	6 9/32	Rd160x18	12 21/32	42 3/16	14 5/32	7 1/8	1420	
80	9 13/16	7 27/32	12 25/32	8 11/32	8 11/32	20 1/4	41 25/32	10 13/32	7 1/16	Rd180x20	14 1/32	47 11/16	15 23/32	7 25/32	1986	
100	11	8 13/16	14 5/16	9 9/32	9 9/32	22 5/8	46 11/16	11 23/32	7 27/32	Rd200x22	15 15/16	53 3/16	17 1/2	8 31/32	2754	
125	12 3/8	9 13/16	16 1/16	10 13/32	10 13/32	25 3/8	52 11/32	13 3/16	8 27/32	Rd225x24	18 9/32	59 29/32	19 9/32	9 21/32	3891	
160	13 31/32	11	18 1/32	11 25/32	11 25/32	28 17/32	59 1/4	14 3/4	9 13/16	Rd250x28	20 1/16	67 15/32	20 27/32	10 25/32	5430	
200	15 23/32	12 3/8	20 1/4	13 3/16	13 3/16	31 15/32	66 5/16	16 23/32	11	Rd280x32	24 1/8	77 7/32	23 7/32	13 1/2	7577	
250	17 11/16	13 31/32	22 13/16	14 3/4	14 3/4	34 1/16	74 3/16	18 11/16	12 19/32	Rd320x36	27 5/32	87 9/32	26 3/4	15 1/16	10697	
320	19 21/32	15 23/32	25 9/16	16 23/32	16 23/32	37 3/8	83 27/32	20 27/32	14 9/16	Rd360x36	30 11/16	98 19/32	29 29/32	17 1/32	14870	
400	22 1/32	17 11/16	28 23/32	18 11/16	18 11/16	41 1/8	93 1/2	23 19/32	16 5/16	Rd400x36	34 7/16	111	34 1/32	18 31/32	20973	

Tolerances: forging tolerance acc. to DIN15402. Machining tolerances as per DIN15403.
 Modifications: Shank length (L). Further dimensions upon request.
 Hook section: RSN up to No 10 and greater sizes RFN. For the largest hooks, other sections b1xH can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Ramshorn forged hooks based on recognized european standards
 Ramshorn forged hooks based on DIN15402 design
Machined fitted with nut, crosshead and bearing

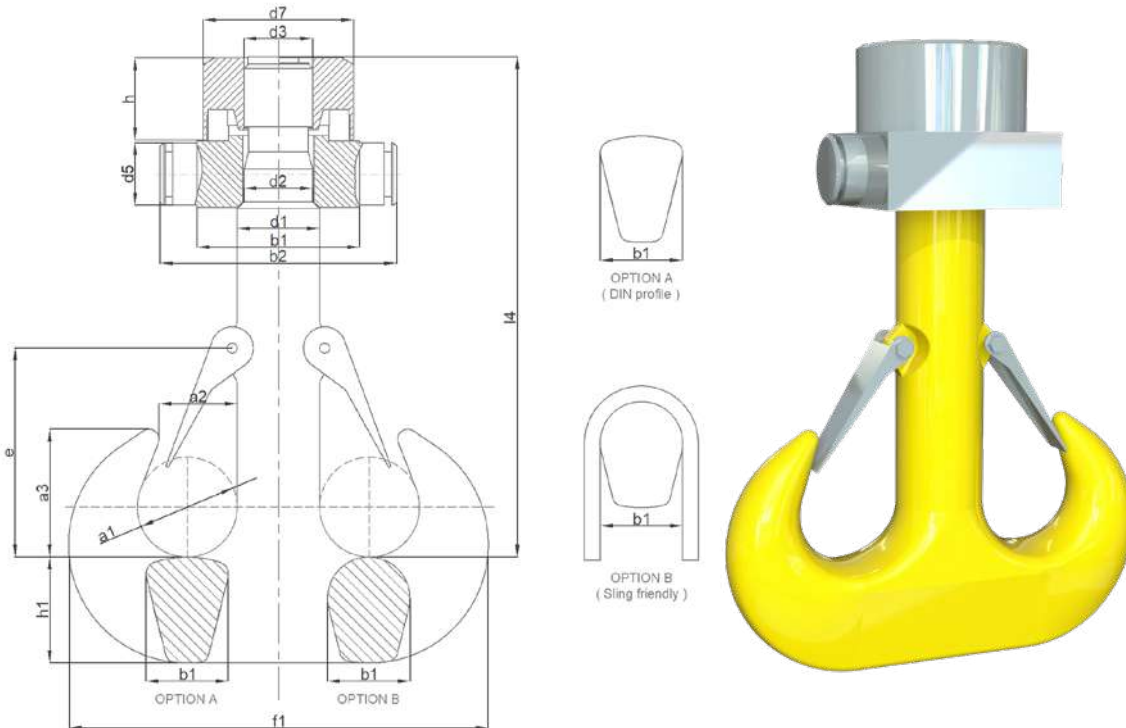

- WLL: from 5t to 2.000t.
- Hook, Nut and Crosshead forged, heat treated and thread fully machined as per DIN15403 design.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.


RAMSHORN FORGED HOOKS BASED ON DIN15402 DESIGN MACHINED FITTED WITH NUT, CROSSHEAD AND BEARING																			
Overall dimensions (inch)												DIN15412 Crosshead		DIN15413 Nut		Weight			
No	a1	a2	a3	b1	d1	e	f1	h1	d2	h11	d3	l4	b1	b2	d5	h9	d7	h	lbs
2,5	1 15/16	1 9/16	2 17/32	1 9/16	1 5/8	4 13/32	8 3/16	1 15/16	1 13/32	M36	9 9/16	3 1/8	4 29/32	1 5/32	2 3/4	1 23/32	21		
4	2 3/16	1 3/4	2 27/32	1 7/8	1 7/8	4 7/8	9 11/32	2 11/32	1 5/8	M42	10 25/32	3 17/32	5 1/2	1 1/8	3 1/8	1 29/32	30		
5	2 15/32	1 15/16	3 7/32	2 1/16	2 1/16	5 5/8	10 15/32	2 5/8	1 3/4	M45	12 1/32	3 29/32	6 3/32	1 9/16	3 23/32	2 3/16	45		
6	2 25/32	2 3/16	3 19/32	2 11/32	2 11/32	6 9/32	11 27/32	2 15/16	1 15/16	Rd50x6	14 3/8	4 29/32	7 9/32	1 3/4	4 1/2	2 11/32	60		
8	3 1/8	2 15/32	4 1/32	2 5/8	2 5/8	7 5/32	13 1/4	3 11/32	2 3/16	Rd56x6	15 27/32	5 1/2	8 1/4	1 15/16	4 29/32	2 5/8	87		
10	3 17/32	2 25/32	4 9/16	2 15/16	2 15/16	7 17/32	14 13/16	3 23/32	2 1/2	Rd64x8	17 1/8	6 9/32	9 1/32	2 5/32	5 11/16	2 31/32	126		
12	3 29/32	3 1/8	5 3/32	3 11/32	3 11/32	8 1/4	16 9/16	4 5/32	2 13/16	Rd72x8	19 11/32	7 1/16	10 13/32	2 11/32	6 15/32	3 13/32	179		
16	4 13/32	3 17/32	5 23/32	3 23/32	3 23/32	9 5/16	18 17/32	4 9/8	3 1/8	Rd80x10	22 1/8	7 15/32	10 13/16	2 3/4	6 7/8	3 9/16	238		
20	4 29/32	3 29/32	6 13/32	4 5/32	4 5/32	10 13/32	20 7/8	5 3/16	3 1/2	Rd90x10	24 23/32	7 27/32	11 19/32	3 1/8	7 9/32	4	321		
25	5 1/2	4 13/32	7 5/32	4 5/8	4 5/8	12 3/8	23 17/32	5 7/8	3 29/32	Rd100x12	27 3/8	8 21/32	12 1/2	3 17/32	8 1/16	4 7/16	440		
32	6 9/32	4 29/32	8 1/16	5 3/16	5 3/16	13 3/16	26 7/16	6 11/16	4 5/16	Rd110x12	30 7/32	10 7/32	14 7/8	3 29/32	9 7/16	5 5/32	642		
40	7 1/16	5 1/2	9 1/32	5 7/8	5 7/8	14 3/4	29 21/32	7 15/32	4 29/32	Rd125x14	33 31/32	11 7/32	16 5/16	4 5/16	10 5/8	5 21/32	922		
50	7 27/32	6 9/32	10 7/32	6 11/16	6 11/16	16 17/32	33 1/8	8 11/32	5 1/2	Rd140x16	37 5/32	13 3/16	18 9/32	4 29/32	12 19/32	6	1305		
63	8 13/16	7 1/16	11 15/32	7 15/32	7 15/32	18 3/4	37 5/32	9 9/32	6 3/8	Rd160x18	42 3/16	14 15/16	20 17/32	5 1/2	14 5/32	7 1/8	1830		
80	9 13/16	7 27/32	12 25/32	8 11/32	8 11/32	20 1/4	41 25/32	10 13/32	7 1/16	Rd180x20	47 11/16	16 17/32	22 7/32	6 9/32	15 23/32	7 25/32	2531		
100	11	8 13/16	14 5/16	9 9/32	9 9/32	22 5/8	46 11/16	11 25/32	7 27/32	Rd200x22	53 3/16	18 1/2	25 3/8	7 1/16	17 1/2	8 31/32	3527		
125	12 3/8	9 13/16	16 1/16	10 13/32	10 13/32	25 3/8	52 11/32	13 3/16	8 27/32	Rd225x24	59 29/32	20 1/16	26 15/16	7 27/32	19 9/32	9 21/32	4916		
160	13 31/32	11	18 1/32	11 25/32	11 25/32	28 17/32	59 1/4	14 3/4	9 13/16	Rd250x28	67 15/32	21 5/8	29 1/2	8 21/32	20 27/32	10 25/32	6834		
200	15 23/32	12 3/8	20 1/4	13 3/16	13 3/16	31 15/32	66 5/16	16 23/32	11	Rd280x32	77 7/32	24	31 7/8	9 7/16	23 7/32	13 1/2	9625		
250	17 11/16	13 31/32	22 19/16	14 3/4	14 3/4	34 7/16	74 3/16	18 11/16	12 19/32	Rd320x36	87 9/32	27 17/32	36 7/32	10 7/32	26 3/4	15 1/16	13744		
320	19 21/32	15 23/32	25 9/16	16 23/32	16 23/32	37 3/8	83 21/32	20 27/32	14 9/16	Rd360x36	98 19/32	31 3/32	40 17/32	11	29 29/32	17 1/32	19381		
400	22 1/32	17 11/16	28 23/32	18 11/16	18 11/16	41 1/8	93 1/2	23 19/32	16 5/16	Rd400x36	111	35 7/32	45 1/16	11 25/32	34 1/32	18 31/32	26940		

Tolerances: forging tolerance acc. to DIN15402. Machining tolerances as per DIN15403.
 Modifications: Shank length (L). Further dimensions upon request.

Hook section: RSN up to No 10 and greater sizes RFN. For the largest hooks, other sections b1xH can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Ramshorn forged hooks based on recognized european standards
 Ramshorn forged hooks based on BS3017:1958 design
Unmachined

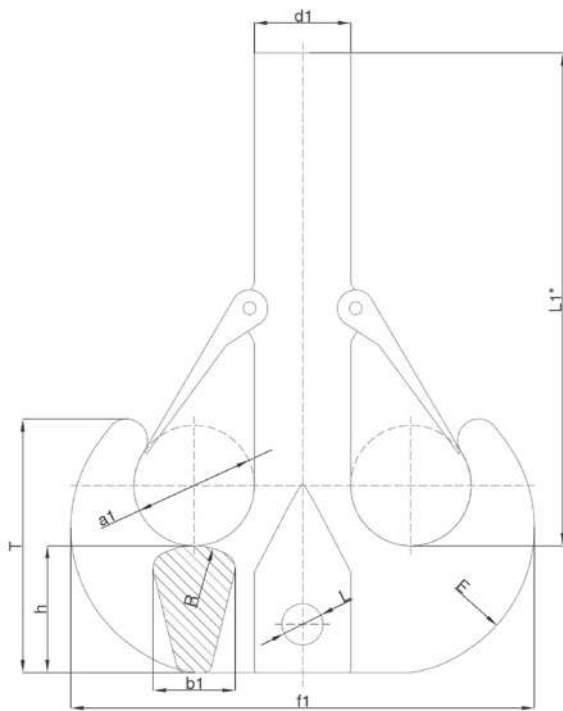


- WLL: from 5t to 1.000t (bottom hole excluded).
- Hook forged and heat treated. Machining recommended to perform by manufacturer.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended after machining.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

RAMSHORN FORGED HOOKS BASED ON BS3017:1958 UNMACHINED											
Overall dimensions (inch)											Weight
No	a1	E	d1	h	L	b1	L1*	R	T	f1	lbs
B10	3 23/32	4 15/32	2 31/32	3 29/32	1 9/32	2 17/32	20 1/16	1/16	7 27/32	14 13/32	88
B15	4 1/4	5 1/16	3 1/4	4 1/4	1 9/16	2 3/4	22 13/16	1/16	8 19/32	16 7/32	110
B20	4 23/32	5 5/8	4	4 5/8	1 13/16	3	25 9/16	2 15/32	9 3/8	18 1/32	139
B25	5 1/4	6 5/32	4 1/2	5 5/32	1 13/16	3 11/32	28 1/8	2 25/32	10 1/2	20 1/16	174
B30	5 11/16	6 13/16	4 3/4	5 21/32	2 5/32	3 11/16	28 1/8	3 1/16	11 13/32	21 7/8	214
B35	6 1/32	7 1/4	5	6 1/8	2 5/32	3 31/32	31 3/32	3 9/32	12 5/16	22 31/32	260
B40	6 3/8	7 5/8	5 1/4	6 3/8	2 5/16	4 1/8	31 3/32	3 7/16	12 29/32	24 1/4	315
B45	6 11/16	8	5 1/2	6 7/8	2 5/16	4 15/32	34 13/16	3 11/16	13 13/16	25 23/32	386
B50	7	8 1/4	5 3/4	7 1/8	2 9/16	4 5/8	34 13/16	3 27/32	14 3/8	26 29/32	472
B60	7 1/2	9	6	7 7/8	2 9/16	5 3/32	37 31/32	4 1/4	15 3/4	28 13/16	578
B70	7 15/16	9 1/2	6 1/4	8 1/4	2 29/32	5 11/32	37 31/32	4 7/16	16 3/4	31 5/32	694
B80	8 5/16	10 1/4	6 1/2	8 7/8	2 29/32	5 3/4	42 29/32	4 25/32	17 13/16	31 15/16	827
B100	9	11 3/8	7	9 7/8	3 5/16	6 13/32	42 29/32	5 5/16	19 5/8	34 23/32	996
B120	9 1/2	12 1/4	7 1/2	10 3/4	3 9/16	6 31/32	48 19/32	5 25/32	21 1/4	37 7/32	1202
B140	10 1/32	12 1/8	8	11 3/8	3 13/16	7 3/8	48 19/32	6 1/8	22 5/8	39 1/2	1444
B160	10 15/32	13 5/8	8 1/2	12 1/8	4 3/32	7 7/8	48 19/32	6 17/32	24	41 15/32	1720
B180	11	14 3/8	9	12 7/8	4 13/32	8 11/32	54 1/8	6 15/16	25 1/4	44	2061
B200	11 5/16	15 1/8	9 1/2	13 5/8	4 9/16	8 27/32	54 1/8	7 11/32	26 3/4	49 29/32	2445
B250	12 15/32	17	10 31/32	15 15/16	5 5/16	10 11/32	61	8 19/32	30	51 15/32	2943
B300	13 1/2	17 31/32	12	16 19/32	5 17/32	10 25/32	68 11/16	8 31/32	31 5/8	54 15/16	3549
B350	14	19	12 1/2	17 3/4	5 31/32	11 17/32	68 11/16	9 9/16	33 1/4	58 1/32	4222
B400	15	20 3/8	13 1/2	18 27/32	6 5/16	12 7/32	78 21/32	10 5/32	35 3/8	61 25/32	5071

Tolerances: -0/+7% forging tolerance.
 Modifications: Shank length (L). Further dimensions upon request.
 Hook section: b1xH: other sections can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Ramshorn forged hooks based on recognized european standards
 Ramshorn forged hooks based on BS3017:1958 design
 Machined fitted with nut, crosshead and bearing

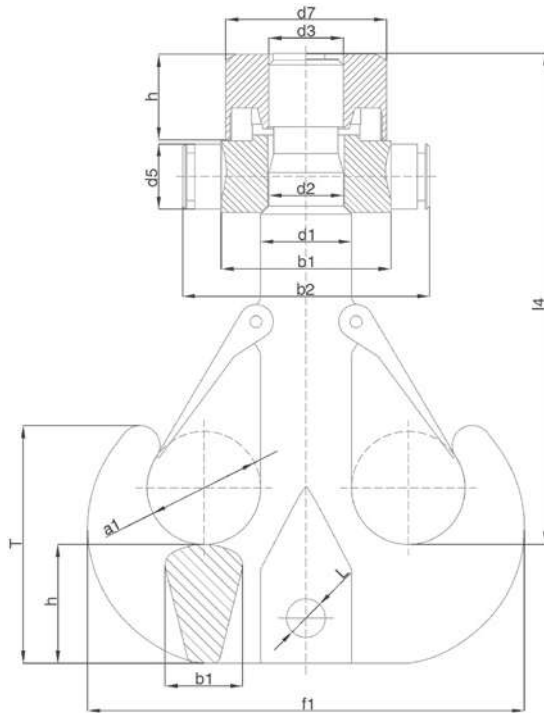


- WLL: from 5t to 1.000t (bottom hole excluded).
- Hook and Nut and Crosshead forged, heat treated and thread fully machined as per DIN15403 design.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

RAMSHORN FORGED HOOKS BASED ON BS3017:1958 MACHINED FITTED WITH NUT, CROSSHEAD AND BEARING																		
Overall dimensions (inch)											DIN15412 Crosshead			DIN15413 Nut	Weight			
No	a1	d1	h	L	b1	T	f1	d2	h11	d3	l4	b1	b2	d5	h9	d7	h	lbs
B10	3 23/32	2 31/32	3 29/32	1 9/32	2 17/32	7 21/32	14 13/32	2 1/2	Rd64x8	17 1/8	6 9/32	9 1/32	2 5/32	5 11/16	2 31/32	101		
B15	4 1/4	3 1/4	4 1/4	1 9/16	2 3/4	8 19/32	16 7/32	2 1/2	Rd64x8	17 1/8	6 9/32	9 1/32	2 5/32	5 11/16	2 31/32	128		
B20	4 23/32	4	4 5/8	1 13/16	3	9 3/8	18 1/32	3 1/8	Rd80x10	22 1/8	7 15/32	10 19/16	2 3/4	6 7/8	3 9/16	161		
B25	5 1/4	4 1/2	5 5/32	1 13/16	3 11/32	10 1/2	20 1/16	3 17/32	Rd90x10	24 23/32	7 27/32	11 19/32	3 1/8	7 9/32	4	201		
B30	5 11/16	4 3/4	5 21/32	2 5/32	3 11/16	11 13/32	21 7/8	3 29/32	Rd100x12	27 3/8	8 21/32	12 1/2	3 17/32	8 1/16	4 7/16	247		
B35	6 1/32	5	6 1/8	2 5/32	3 31/32	12 5/16	22 31/32	3 29/32	Rd100x12	27 3/8	8 21/32	12 1/2	3 17/32	8 1/16	4 7/16	298		
B40	6 3/8	5 1/4	6 3/8	2 5/16	4 1/8	12 29/32	24 1/4	4 5/16	Rd110x12	30 7/32	10 7/32	14 7/8	3 29/32	9 7/16	5 5/32	364		
B45	6 11/16	5 1/2	6 7/8	2 5/16	4 15/32	13 13/16	25 23/32	4 5/16	Rd110x12	30 7/32	10 7/32	14 7/8	3 29/32	9 7/16	5 5/32	448		
B50	7	5 3/4	7 1/8	2 9/16	4 5/8	14 3/8	26 29/32	4 5/16	Rd110x12	30 7/32	10 7/32	14 7/8	3 29/32	9 7/16	5 5/32	542		
B60	7 1/2	6	7 7/8	2 9/16	5 3/32	15 3/4	28 13/16	4 29/32	Rd125x14	33 31/32	11 7/32	16 5/16	4 5/16	10 5/8	5 21/32	664		
B70	7 15/16	6 1/4	8 1/4	2 29/32	5 11/32	16 3/4	31 5/32	4 29/32	Rd125x14	33 31/32	11 7/32	16 5/16	4 5/16	10 5/8	5 21/32	798		
B80	8 5/16	6 1/2	8 7/8	2 29/32	5 3/4	17 13/16	31 15/16	4 29/32	Rd125x14	33 31/32	11 7/32	16 5/16	4 5/16	10 5/8	5 21/32	959		
B100	9	7	9 7/8	3 5/16	6 13/32	19 5/8	34 23/32	5 1/2	Rd140x16	37 5/32	13 3/16	18 9/32	4 29/32	12 19/32	6	1155		
B120	9 1/2	7 1/2	10 3/4	3 9/16	6 31/32	21 1/4	37 7/32	6 9/32	Rd160x18	42 3/16	14 15/16	20 17/32	5 1/2	14 5/32	7 1/8	1380		
B140	10 1/32	8	11 3/8	3 13/16	7 3/8	22 5/8	39 1/2	6 9/32	Rd160x18	42 3/16	14 15/16	20 17/32	5 1/2	14 5/32	7 1/8	1660		
B160	10 15/32	8 1/2	12 1/8	4 5/32	7 7/8	24	41 15/32	7 1/16	Rd180x20	47 11/16	16 17/32	22 7/32	6 9/32	15 23/32	7 25/32	1978		
B180	11	9	12 7/8	4 13/32	8 11/32	25 1/4	44	7 1/16	Rd180x20	47 11/16	16 17/32	22 7/32	6 9/32	15 23/32	7 25/32	2392		
B200	11 5/16	9 1/2	13 5/8	4 9/16	8 27/32	26 3/4	49 29/32	7 27/32	Rd200x22	53 3/16	18 1/2	25 3/8	7 1/16	17 1/2	8 31/32	2811		
B250	12 15/32	10 31/32	15 15/16	5 5/16	10 11/32	30 /	51 15/32	8 27/32	Rd225x24	59 29/32	20 1/16	26 15/16	7 27/32	19 9/32	9 21/32	3417		
B300	13 1/2	12 /	16 19/32	5 17/32	10 25/32	31 5/8	54 15/16	9 13/16	Rd250x28	67 15/32	21 5/8	29 1/2	8 21/32	20 27/32	10 25/32	4079		
B350	14	12 1/2	17 3/4	5 31/32	11 17/32	33 1/4	58 1/32	9 13/16	Rd250x28	67 15/32	21 5/8	29 1/2	8 21/32	20 27/32	10 25/32	4896		
B400	15	13 1/2	18 27/32	6 5/16	12 7/32	35 3/8	61 25/32	11	Rd280x32	77 7/32	24 /	31 7/8	9 7/16	23 7/32	13 1/2	5882		

Tolerances: -0/+7% forging tolerance. Machining tolerances as per DIN15403.
 Modifications: Shank length (L). Further dimensions upon request.
 Hook section: b1xH: other sections can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Ramshorn forged hooks based on recognized european standards
 Ramshorn forged hooks based on DIN15402-B design
Unmachined

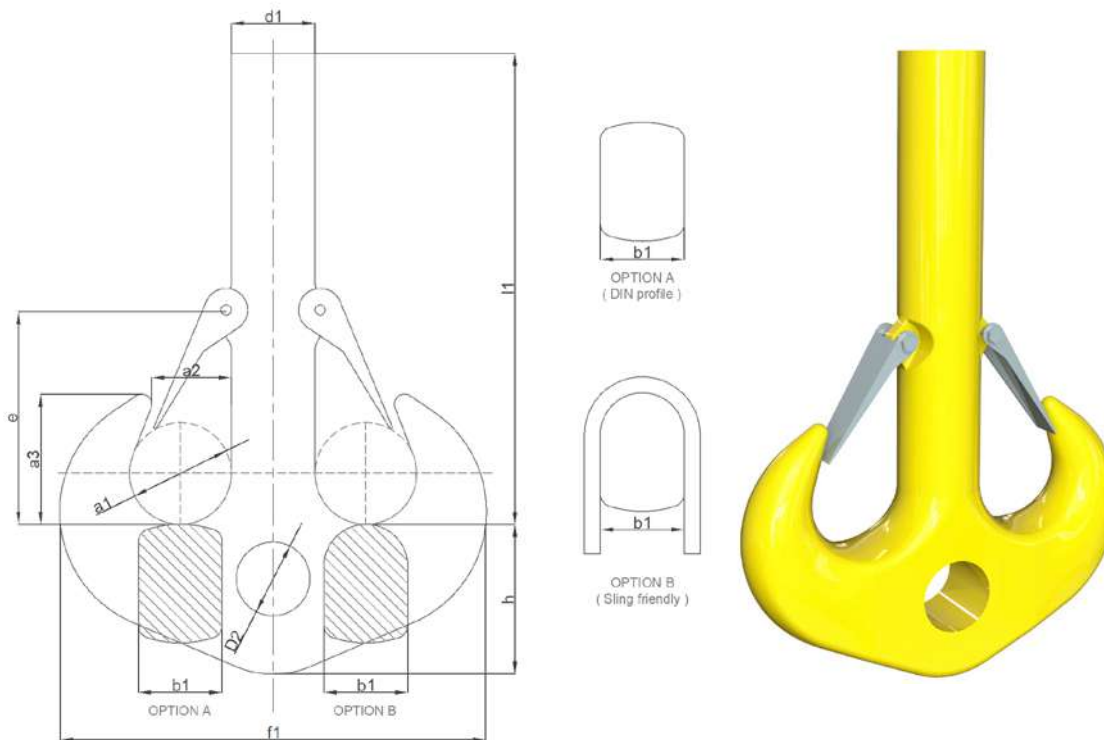


- WLL: from 10t to 2.000t (bottom hole included).
- Hook forged and heat treated. Machining recommended to perform by manufacturer.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended after machining.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

RAMSHORN FORGED HOOKS BASED ON DIN15402-B DESIGN UNMACHINED											
Overall dimensions (inch)											Weight
No	a1	a2	a3	b1	d1	D2 H15	e	f1	h	l1	lbs
10	3 17/32	2 25/32	4 9/16	2 15/16	2 15/16	2 29/32	7 17/32	14 13/16	5 3/32	17 11/16	90
12	3 29/32	3 1/8	5 3/32	3 11/32	3 11/32	3 1/16	8 1/4	16 9/16	5 7/8	20 1/16	126
16	4 13/32	3 17/32	5 23/32	3 23/32	3 23/32	3 3/8	9 5/16	18 17/32	6 11/16	22 13/16	181
20	4 29/32	3 29/32	6 13/32	4 5/32	4 5/32	3 3/4	10 13/32	20 7/8	7 15/32	25 9/16	254
25	5 1/2	4 13/32	7 5/32	4 5/8	4 5/8	4 5/32	12 3/8	23 17/32	8 11/32	28 1/8	353
32	6 9/32	4 29/32	8 1/16	5 3/16	5 3/16	4 9/16	13 3/16	26 7/16	9 9/32	31 3/32	505
40	7 1/16	5 1/2	9 1/32	5 7/8	5 7/8	5 5/32	14 3/4	29 21/32	10 13/32	34 13/16	728
50	7 27/32	6 9/32	10 7/32	6 11/16	6 11/16	5 23/32	16 17/32	33 1/8	11 25/32	37 31/32	1010
63	8 13/16	7 1/16	11 15/32	7 15/32	7 15/32	6 19/32	18 3/32	37 5/32	13 3/16	42 29/32	1407
80	9 13/16	7 27/32	12 25/32	8 11/32	8 11/32	7 3/8	20 1/4	41 25/32	14 3/4	48 19/32	1967
100	11	8 13/16	14 5/16	9 9/32	9 9/32	8 3/16	22 5/8	46 11/16	16 23/32	54 1/8	2751
125	12 3/8	9 13/16	16 1/16	10 13/32	10 13/32	9 1/4	25 3/8	52 11/32	18 11/16	61	3874
160	13 31/32	11	18 1/32	11 25/32	11 25/32	10 7/32	28 17/32	59 1/4	20 27/32	68 11/16	5512
200	15 23/32	12 3/8	20 1/4	13 3/16	13 3/16	11 3/32	31 15/32	66 5/16	23 19/32	77 5/32	7848
250	17 11/16	13 31/32	22 13/16	14 3/4	14 3/4	12 9/32	34 7/16	74 3/16	26 3/8	87	11096
320	19 21/32	15 23/32	25 9/16	16 23/32	16 23/32	13 3/8	37 3/8	83 21/32	29 1/2	99	15642
400	22 1/32	17 11/16	28 23/32	18 11/16	18 11/16	14 7/8	41 1/8	93 1/2	33 1/16	111 13/32	22068

Tolerances: forging tolerance acc. to DIN15402.
 Modifications: Shank length (L). Further dimensions upon request.
 Hook section: b1xH: other sections can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Ramshorn forged hooks based on recognized european standards
 Ramshorn forged hooks based on DIN15402-B design
Machined fitted with nut

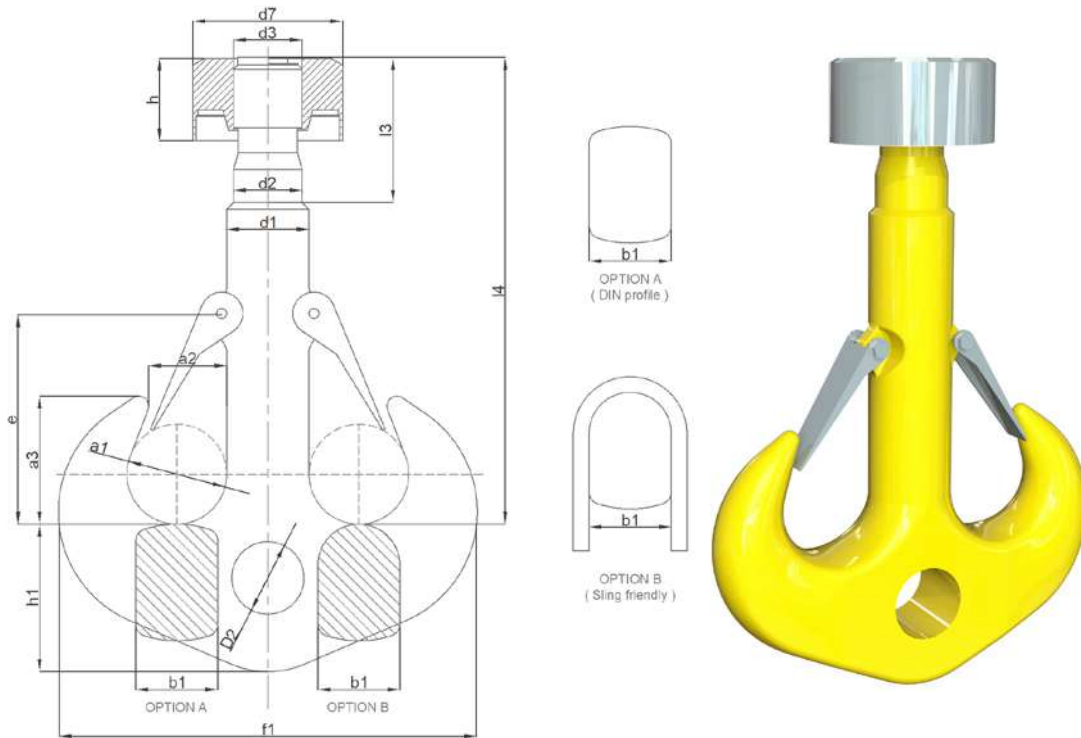


- WLL: from 10t to 2.000t (bottom hole included).
- Hook and Nut forged, heat treated and thread fully machined as per DIN15403 design.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

RAMSHORN FORGED HOOKS BASED ON DIN15402-B DESIGN MACHINED FITTED WITH NUT																
Overall dimensions (inch)														DIN15413 Nut		Weight
No	a1	a2	a3	b1	d1	e	f1	D2 H15	h1	d2 h11	d3	l3	l4	d7	h	lbs
10	3 17/32	2 25/32	4 9/16	2 15/16	2 15/16	7 17/32	14 13/16	2 29/32	5 3/32	2 1/2	Rd64x8	5 5/16	17 1/8	5 11/16	2 31/32	104
12	3 29/32	3 1/8	5 3/32	3 11/32	3 11/32	8 1/4	16 9/16	3 1/16	5 7/8	2 13/16	Rd72x8	6 5/32	19 11/32	6 15/32	3 13/32	144
16	4 13/32	3 17/32	5 23/32	3 23/32	3 23/32	9 5/16	18 17/32	3 3/8	6 11/16	3 1/8	Rd80x10	6 11/16	22 1/8	6 7/8	3 9/16	203
20	4 29/32	3 29/32	6 13/32	4 5/32	4 5/32	10 13/32	20 7/8	3 3/4	7 15/32	3 17/32	Rd90x10	7 11/32	24 23/32	7 9/32	4	282
25	5 1/2	4 13/32	7 5/32	4 5/8	4 5/8	12 3/8	23 17/32	4 5/32	8 11/32	3 29/32	Rd100x12	8 1/8	27 3/8	8 1/16	4 7/16	390
32	6 9/32	4 29/32	8 1/16	5 3/16	5 3/16	13 3/16	26 7/16	4 9/16	9 9/32	4 5/16	Rd110x12	9 1/8	30 7/32	9 7/16	5 5/32	560
40	7 1/16	5 1/2	9 1/32	5 7/8	5 7/8	14 3/4	29 21/32	5 5/32	10 13/32	4 29/32	Rd125x14	10 3/32	33 31/32	10 5/8	5 21/32	811
50	7 27/32	6 9/32	10 7/32	6 11/16	6 11/16	16 17/32	33 1/8	5 29/32	11 25/32	5 1/2	Rd140x16	11	37 5/32	12 19/32	6	1131
63	8 13/16	7 1/16	11 15/32	7 15/32	7 15/32	18 3/32	37 5/32	6 19/32	13 3/16	6 9/32	Rd160x18	12 21/32	42 3/16	14 5/32	7 1/8	1583
80	9 13/16	7 27/32	12 25/32	8 11/32	8 11/32	20 1/4	41 25/32	7 3/8	14 3/4	7 1/16	Rd180x20	14 1/32	47 11/16	15 23/32	7 25/32	2209
100	11	8 13/16	14 5/16	9 9/32	9 9/32	22 5/8	46 11/16	8 3/16	16 23/32	7 27/32	Rd200x22	15 13/16	53 3/16	17 1/2	8 31/32	3082
125	12 3/8	9 13/16	16 1/16	10 13/32	10 13/32	25 3/8	52 11/32	9 1/4	18 11/16	8 7/32	Rd225x24	18 9/32	59 29/32	19 9/32	9 21/32	4336
160	13 31/32	11	18 1/32	11 25/32	11 25/32	28 17/32	59 1/4	10 7/32	20 27/32	9 13/16	Rd250x28	20 1/16	67 15/32	20 27/32	10 25/32	6107
200	15 23/32	12 3/8	20 1/4	13 3/16	13 3/16	31 15/32	66 5/16	11 3/32	23 19/32	11	Rd280x32	24 1/8	77 7/32	23 7/32	13 1/2	8664
250	17 11/16	13 31/32	22 13/16	14 3/4	14 3/4	34 7/16	74 3/16	12 9/32	26 3/8	12 19/32	Rd320x36	27 5/32	87 9/32	26 3/4	15 1/16	12467
320	19 21/32	15 23/32	25 9/16	16 23/32	16 23/32	37 3/8	83 21/32	13 3/8	29 1/2	14 9/16	Rd360x36	30 11/16	98 19/32	29 29/32	17 1/32	16760
400	22 1/32	17 11/16	28 23/32	18 11/16	18 11/16	41 1/8	93 1/2	14 7/8	33 1/16	16 5/16	Rd400x36	34 7/16	111	34 1/32	18 31/32	23600

Tolerances: forging tolerance acc. to DIN15402. Machining tolerances as per DIN15403.
 Modifications: Shank length (L). Further dimensions upon request.
 Hook section: b1xH: other sections can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Ramshorn forged hooks based on recognized european standards
 Ramshorn forged hooks based on DIN15402-B design
 Machined fitted with nut, crosshead and bearing

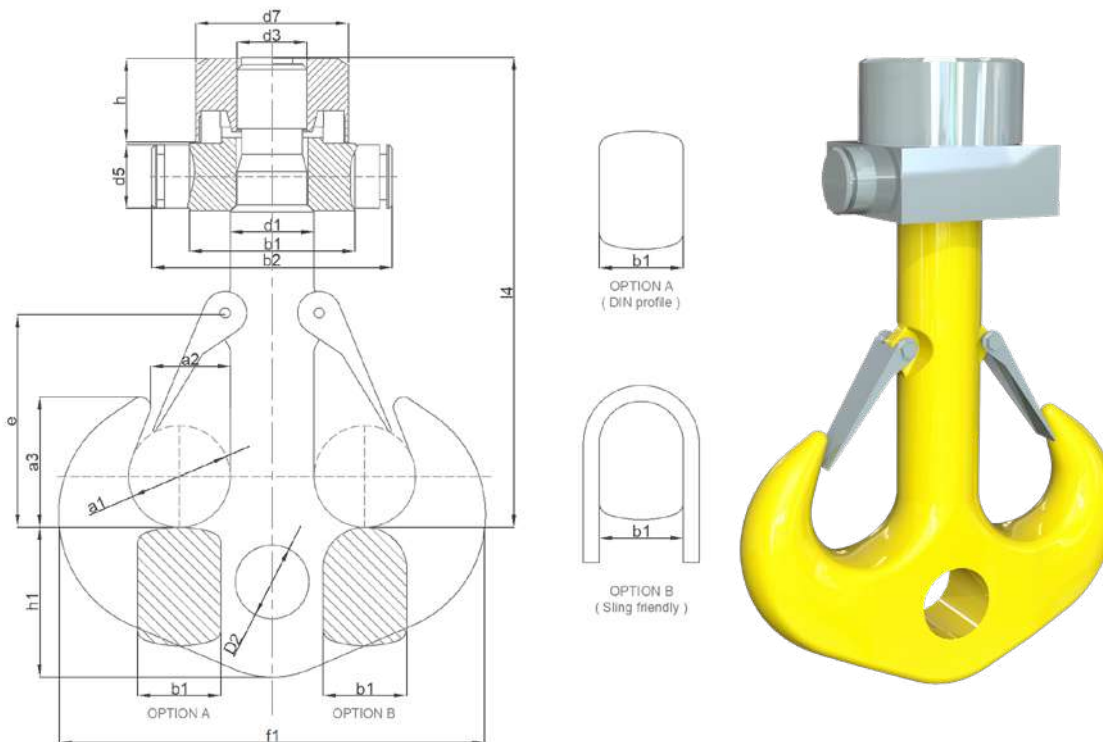




- WLL: from 10t to 2.000t (bottom hole included).
- Hook, Nut and crosshead forged, heat treated and thread fully machined as per DIN15403 design.
- Material: carbon, alloys and super alloys.
Stainless steels available upon request.
- Mechanical properties: P, S, T, V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

RAMSHORN FORGED HOOKS BASED ON DIN15402-B DESIGN MACHINED FITTED WITH NUT, CROSSHEAD AND BEARING																	
Overall dimensions (inch)											DIN15412 Crosshead		DIN15413 Nut		Weight		
No	a1	a2	a3	b1	d1	e	f1	D2 H15	h1	d3	l4	b1	b2	d5 h9	d7	h	lbs
10	3 17/32	2 29/32	4 9/16	2 15/16	2 15/16	7 17/32	14 13/16	2 29/32	5 3/32	Rd64x8	17 1/8	6 9/32	9 1/32	2 5/32	5 11/16	2 31/32	136
12	3 29/32	3 1/8	5 3/32	3 11/32	3 11/32	8 1/4	16 9/16	3 1/16	5 7/8	Rd72x8	19 11/32	7 1/16	10 13/32	2 11/32	6 15/32	3 13/32	193
16	4 13/32	3 17/32	5 23/32	3 23/32	3 23/32	9 5/16	18 17/32	3 3/8	6 11/16	Rd80x10	22 1/8	7 15/32	10 13/16	2 3/4	6 7/8	3 9/16	262
20	4 29/32	3 29/32	6 13/32	4 5/32	4 5/32	10 13/32	20 7/8	3 3/4	7 15/32	Rd90x10	24 23/32	7 27/32	11 19/32	3 1/8	7 9/32	4	355
25	5 1/2	4 13/32	7 5/32	4 5/8	4 5/8	12 3/8	23 17/32	4 5/32	8 11/32	Rd100x12	27 3/8	8 21/32	12 1/2	3 17/32	8 1/16	4 7/16	488
32	6 9/32	4 29/32	8 1/16	5 3/16	5 3/16	13 3/16	26 7/16	4 9/16	9 9/32	Rd110x12	30 7/32	10 7/32	14 7/8	3 29/32	9 7/16	5 5/32	712
40	7 1/16	5 1/2	9 1/32	5 7/8	5 7/8	14 3/4	29 21/32	5 5/32	10 13/32	Rd125x14	33 31/32	11 7/32	16 5/16	4 5/16	10 5/8	5 21/32	1019
50	7 27/32	6 9/32	10 7/32	6 11/16	6 11/16	16 17/32	33 1/8	5 23/32	11 25/32	Rd140x16	37 5/32	13 3/16	18 9/32	4 29/32	12 19/32	6	1446
63	8 13/16	7 1/16	11 15/32	7 15/32	7 15/32	18 3/32	37 5/32	6 19/32	13 3/16	Rd160x18	42 3/16	14 15/16	20 17/32	5 1/2	14 5/32	7 1/8	2030
80	9 13/16	7 27/32	12 25/32	8 11/32	8 11/32	20 1/4	41 25/32	7 3/8	14 3/4	Rd180x20	47 11/16	16 17/32	22 7/32	6 9/32	15 23/32	7 25/32	2824
100	11	8 13/16	14 5/16	9 9/32	9 9/32	22 5/8	46 11/16	8 3/16	16 23/32	Rd200x22	53 3/16	18 1/2	25 3/8	7 1/16	17 1/2	8 31/32	3942
125	12 3/8	9 13/16	16 1/16	10 13/32	10 13/32	25 3/8	52 11/32	9 1/4	18 11/16	Rd225x24	59 29/32	20 1/16	26 15/16	7 27/32	19 9/32	9 21/32	5503
160	13 31/32	11	18 1/32	11 25/32	11 25/32	28 17/32	59 1/4	10 7/32	20 21/32	Rd250x28	67 15/32	21 5/8	29 1/2	8 21/32	20 27/32	10 25/32	7683
200	15 23/32	12 3/8	20 1/4	13 3/16	13 3/16	31 15/32	66 5/16	11 3/32	23 19/32	Rd280x32	77 7/32	24	31 7/8	9 7/16	23 7/32	13 1/2	10827
250	17 11/16	13 31/32	22 13/16	14 3/4	14 3/4	34 7/16	74 3/16	12 9/32	26 3/8	Rd320x36	87 9/32	27 17/32	36 7/32	10 7/32	26 3/4	15 1/16	15514
320	19 21/32	15 23/32	25 9/16	16 23/32	16 23/32	37 3/8	83 21/32	13 3/8	29 1/2	Rd360x36	98 19/32	31 3/32	40 17/32	11	29 29/32	17 1/32	20507
400	22 1/32	17 11/16	28 23/32	18 11/16	18 11/16	41 1/8	93 1/2	14 7/8	33 1/16	Rd400x36	111	35 7/32	45 1/16	11 25/32	34 1/32	18 31/32	28953

Tolerances: forging tolerance acc. to DIN15402. Machining tolerances as per DIN15403.
 Modifications: Shank length (L). Further dimensions upon request.
 Hook section: b1xH: other sections can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Quad forged hooks based on DIN15402-C design Unmachined

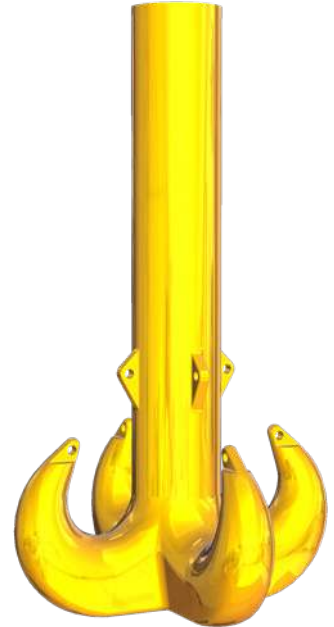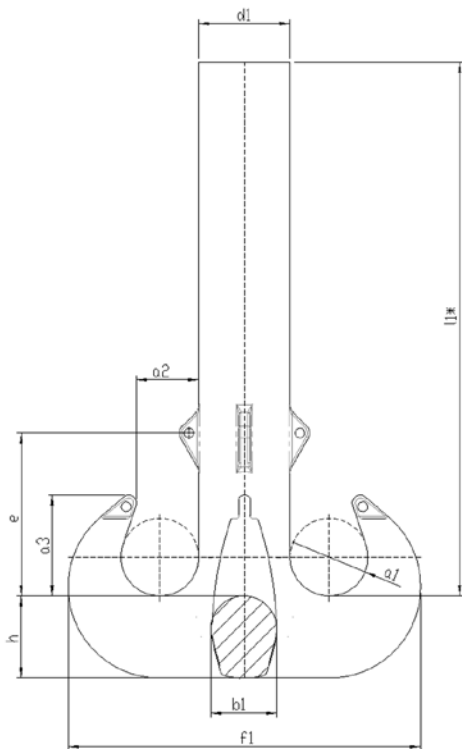

- WLL: from 160t to 4.000t with equal load on 4 prongs/horns.
- Hook forged and heat treated. Machining recommended to perform by manufacturer.
- Material: super alloys.



- Mechanical properties: V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended after machining.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

QUAD FORGED HOOKS BASED ON DIN15402-C UNMACHINED											
Overall dimensions (inch)											Weight
No	WLL (t)	a1	a2	a3	b1	d1	e	f1	h	l1*	lbs
16	160	4 ¹³ / ₃₂	3 ¹⁷ / ₃₂	5 ²³ / ₃₂	3 ²³ / ₃₂	5 ³ / ₁₆	9 ⁵ / ₁₆	20 /	4 ⁵ / ₈	31 ³ / ₃₂	340
20	200	4 ²⁹ / ₃₂	3 ²⁹ / ₃₂	6 ¹³ / ₃₂	4 ⁵ / ₃₂	5 ⁷ / ₈	10 ¹³ / ₃₂	22 ⁵ / ₈	5 ³ / ₁₆	34 ¹³ / ₁₆	487
25	250	5 ¹ / ₂	4 ¹³ / ₃₂	7 ⁵ / ₃₂	4 ⁵ / ₈	6 ¹¹ / ₁₆	12 ³ / ₈	25 ⁹ / ₁₆	5 ⁷ / ₈	37 ³¹ / ₃₂	688
32	320	6 ⁹ / ₃₂	4 ²⁹ / ₃₂	8 ¹ / ₁₆	5 ³ / ₁₆	7 ¹⁵ / ₃₂	13 ³ / ₁₆	28 ²³ / ₃₂	6 ¹¹ / ₁₆	42 ²⁹ / ₃₂	970
40	400	7 ¹ / ₁₆	5 ¹ / ₂	9 ¹ / ₃₂	5 ⁷ / ₈	8 ¹¹ / ₃₂	14 ³ / ₄	32 ¹ / ₈	7 ¹⁵ / ₃₂	48 ¹⁹ / ₃₂	1376
50	500	7 ²⁷ / ₃₂	6 ⁹ / ₃₂	10 ⁷ / ₃₂	6 ¹¹ / ₁₆	9 ⁹ / ₃₂	16 ¹⁷ / ₃₂	35 ²³ / ₃₂	8 ¹¹ / ₃₂	54 ¹ / ₈	1914
63	640	8 ¹³ / ₁₆	7 ¹ / ₁₆	11 ¹⁵ / ₃₂	7 ¹⁵ / ₃₂	10 ¹³ / ₃₂	18 ³ / ₃₂	40 ³ / ₃₂	9 ⁹ / ₃₂	61	2714
80	800	9 ¹³ / ₁₆	7 ²⁷ / ₃₂	12 ²⁵ / ₃₂	8 ¹¹ / ₃₂	11 ²⁵ / ₃₂	20 ¹ / ₄	45 ¹ / ₄	10 ¹³ / ₃₂	68 ¹¹ / ₁₆	3860
100	1000	11	8 ¹³ / ₁₆	14 ⁵ / ₁₆	9 ⁹ / ₃₂	13 ³ / ₁₆	22 ⁵ / ₈	50 ⁹ / ₁₆	11 ²⁵ / ₃₂	78 ²¹ / ₃₂	5461
125	1260	12 ³ / ₈	9 ¹³ / ₁₆	16 ¹ / ₁₆	10 ¹³ / ₃₂	14 ³ / ₄	25 ³ / ₈	56 ¹¹ / ₁₆	13 ³ / ₁₆	88 ⁹ / ₁₆	7694
160	1600	13 ³¹ / ₃₂	11	18 ¹ / ₃₂	11 ²⁵ / ₃₂	16 ²³ / ₃₂	28 ¹⁷ / ₃₂	64 ⁵ / ₃₂	14 ³ / ₄	100 ³ / ₈	11292
200	2000	15 ²³ / ₃₂	12 ³ / ₈	20 ¹ / ₄	13 ³ / ₁₆	18 ¹¹ / ₁₆	31 ¹⁵ / ₃₂	71 ²⁷ / ₃₂	16 ²³ / ₃₂	113 ³¹ / ₃₂	15781
250	2600	17 ¹¹ / ₁₆	13 ³¹ / ₃₂	22 ¹³ / ₁₆	14 ³ / ₄	21 ⁵ / ₈	34 ⁷ / ₁₆	82 ²¹ / ₃₂	18 ¹¹ / ₁₆	128 ²³ / ₃₂	22178
320	3200	19 ²¹ / ₃₂	15 ²³ / ₃₂	25 ⁹ / ₁₆	16 ²³ / ₃₂	24 ¹⁹ / ₃₂	37 ³ / ₈	94 ³ / ₃₂	20 ²⁷ / ₃₂	145 ¹⁵ / ₃₂	31173
400	4000	22 ¹ / ₃₂	17 ¹¹ / ₁₆	28 ²³ / ₃₂	18 ¹¹ / ₁₆	28 ¹⁷ / ₃₂	41 ¹ / ₈	109 ¹ / ₄	23 ¹⁹ / ₃₂	164 ⁹ / ₁₆	45084

WLL based on V material grade.
Tolerances: -0/+7% forging tolerance.
Modifications: Shank length (L). Further dimensions upon request.
Hook section: b1xH; other sections can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Quad forged hooks based on DIN15402-C design
Machined fitted with nut

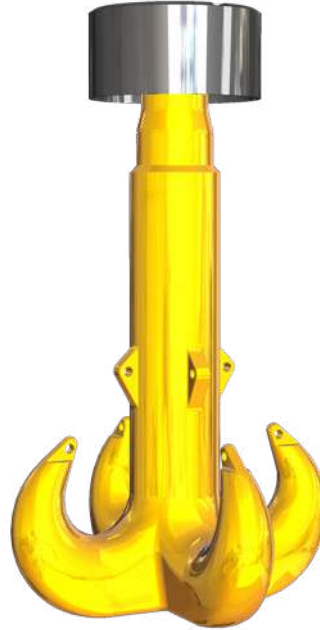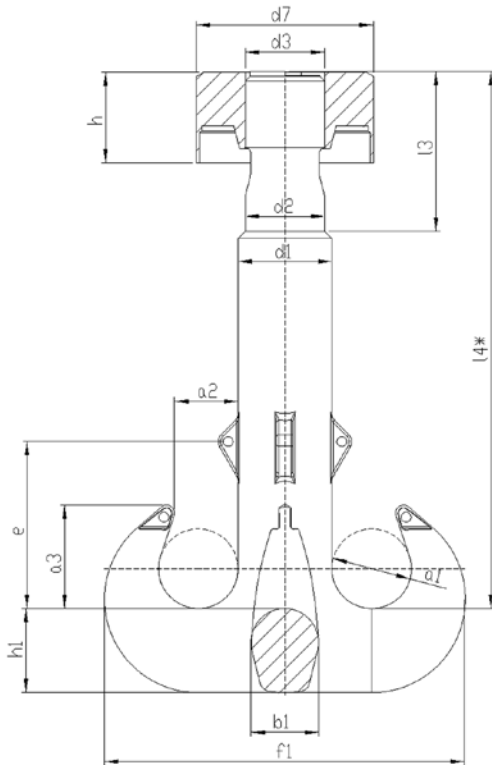



- WLL: from 160t to 4.000t with equal load on 4 prongs/horns.
- Hook and Nut forged, heat treated and thread fully machined as per DIN15403 design.
- Material: super alloys.
- Mechanical properties: V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

QUAD FORGED HOOKS BASED ON DIN15402-C MACHINED FITTED WITH NUT																	
Overall dimensions (inch)														DIN15413 Nut	Weight		
No	WLL (t)	a1	a2	a3	b1	d1	e	f1	h1	d2	h11	d3	l3	l4*	d7	h	lbs
16	160	4 13/32	3 17/32	5 23/32	3 23/32	5 3/16	9 5/16	20 /	4 5/8	4 5/16	Rd110x12	9 1/8	30 7/32	9 7/16	5 5/32	370	
20	200	4 29/32	3 29/32	6 13/32	4 5/32	5 7/8	10 13/32	22 5/8	5 3/16	4 29/32	Rd125x14	10 3/32	33 31/32	10 5/8	5 21/32	531	
25	250	5 1/2	4 13/32	7 5/32	4 5/8	6 11/16	12 3/8	25 9/16	5 7/8	5 1/2	Rd140x16	11	37 5/32	12 19/32	6	754	
32	320	6 9/32	4 29/32	8 1/16	5 3/16	7 15/32	13 3/16	28 23/32	6 11/16	6 9/32	Rd160x18	12 21/32	42 3/16	14 5/32	7 1/8	1080	
40	400	7 1/16	5 1/2	9 1/32	5 7/8	8 11/32	14 3/4	32 1/8	7 15/32	7 1/16	Rd180x20	14 1/32	47 11/16	15 23/32	7 25/32	1638	
50	500	7 27/32	6 9/32	10 7/32	6 11/16	9 9/32	16 17/32	35 23/32	8 11/32	7 27/32	Rd200x22	15 13/16	53 3/16	17 1/2	8 31/32	2112	
63	640	8 13/16	7 1/16	11 15/32	7 15/32	10 13/32	18 3/32	40 3/32	9 9/32	8 27/32	Rd225x24	18 9/32	59 29/32	19 9/32	9 21/32	2972	
80	800	9 13/16	7 27/32	12 25/32	8 11/32	11 25/32	20 1/4	45 1/4	10 13/32	9 19/16	Rd250x28	20 1/16	67 15/32	20 27/32	10 25/32	4142	
100	1000	11	8 13/16	14 5/16	9 9/32	13 3/16	22 5/8	50 9/16	11 25/32	11	Rd280x32	24 1/8	77 7/32	23 7/32	13 1/2	5838	
125	1260	12 3/8	9 13/16	16 1/16	10 13/32	14 3/4	25 3/8	56 11/16	13 3/16	12 19/32	Rd320x36	27 5/32	87 9/32	26 3/4	15 1/16	8212	
160	1600	13 31/32	11	18 1/32	11 25/32	16 23/32	28 17/32	64 5/32	14 3/4	14 9/16	Rd360x36	30 11/16	98 19/32	29 29/32	17 1/32	11526	
200	2000	15 23/32	12 3/8	20 1/4	13 3/16	18 11/16	31 15/32	71 27/32	16 23/32	16 5/16	Rd400x36	34 7/16	111	34 1/32	18 31/32	16358	
250	2600	17 11/16	13 31/32	22 13/16	14 3/4	21 5/8	34 7/16	82 21/32	18 11/16	18 7/8	Rd480x36	38 3/4	125	38 3/8	21 1/4	23071	
320	3200	19 27/32	15 23/32	25 9/16	16 23/32	24 19/32	37 3/8	94 3/32	20 27/32	21 5/8	Rd550x36	43 11/16	140 17/32	42 29/32	23 19/32	32606	
400	4000	22 1/32	17 11/16	28 23/32	18 11/16	28 17/32	41 1/8	109 1/4	23 19/32	25 3/16	Rd640x36	49 3/16	158 1/4	48 1/32	26 3/8	46826	

WLL based on V material grade.
Tolerances: -0/+7% forging tolerance. Machining tolerances as per DIN15403.
Modifications: Shank length (L). Further dimensions upon request.
Hook section: b1xH; other sections can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Quad forged hooks based on DIN15402-C design
Machined fitted with nut, crosshead and bearing

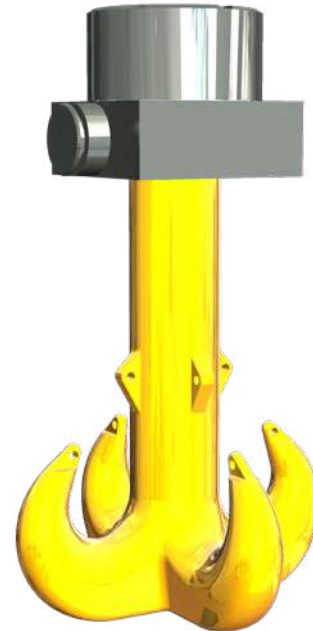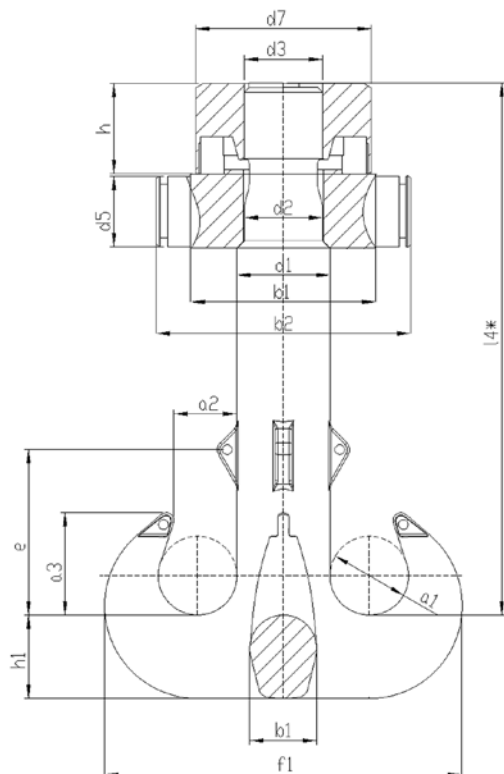


- WLL: from 160t to 4.000t with equal load on 4 prongs/horns.
- Hook, nut and crosshead forged, heat treated and thread fully machined as per DIN15403 design.
- Material: super alloys.
- Mechanical properties: V, W.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

QUAD FORGED HOOKS BASED ON DIN15402-C MACHINED FITTED WITH NUT, CROSSHEAD AND BEARING																		
Overall dimensions (inch)													DIN15412 Crosshead			DIN15413 Nut	Weight	
No	WLL (t)	a1	a2	a3	b1	d1	e	f1	h1	d2 h11	d3	l4*	b1	b2	d5 h9	d7	h	lbs
16	160	4 13/32	3 17/32	5 23/32	3 23/32	5 3/16	9 5/16	20 /	4 5/8	4 5/16	Rd110x12	30 7/32	10 7/32	14 7/8	3 29/32	9 7/16	5 5/32	509
20	200	4 29/32	3 29/32	6 13/32	4 5/32	5 7/8	10 13/32	22 5/8	5 3/16	4 29/32	Rd125x14	33 31/32	11 7/32	16 5/16	4 5/16	10 5/8	5 21/32	717
25	250	5 1/2	4 13/32	7 5/32	4 5/8	6 11/16	12 3/8	25 9/16	5 7/8	5 1/2	Rd140x16	37 5/32	13 3/16	18 9/32	4 29/32	12 19/32	6	1041
32	320	6 9/32	4 29/32	8 1/16	5 3/16	7 15/32	13 3/16	28 23/32	6 11/16	6 9/32	Rd160x18	42 3/16	14 15/16	20 17/32	5 1/2	14 5/32	7 1/8	1497
40	400	7 1/16	5 1/2	9 1/32	5 7/8	8 11/32	14 3/4	32 1/8	7 15/32	7 1/16	Rd180x20	47 11/16	16 11/32	22 7/32	6 9/32	15 23/32	7 25/32	2438
50	500	7 27/32	6 9/32	10 7/32	6 11/16	9 9/32	16 17/32	35 23/32	8 11/32	7 27/32	Rd200x22	53 3/16	18 1/2	25 3/8	7 1/16	17 1/2	8 31/32	2912
63	640	8 13/16	7 1/16	11 15/32	7 15/32	10 13/32	18 3/32	40 3/32	9 9/32	8 27/32	Rd225x24	59 29/32	20 1/16	26 15/16	7 27/32	19 9/32	9 21/32	4052
80	800	9 13/16	7 27/32	12 25/32	8 11/32	11 25/32	20 1/4	45 1/4	10 13/32	9 13/16	Rd250x28	67 15/32	21 5/8	29 1/2	8 21/32	20 27/32	10 25/32	5562
100	1000	11	8 13/16	14 5/16	9 9/32	13 3/16	22 5/8	50 9/16	11 25/32	11	Rd280x32	77 7/32	24	31 7/8	9 7/16	23 1/32	13 1/2	7932
125	1260	12 3/8	9 13/16	16 1/16	10 13/32	14 3/4	25 3/8	56 11/16	13 3/16	12 19/32	Rd320x36	87 9/32	27 17/32	36 7/32	10 7/32	26 3/4	15 1/16	11277
160	1600	13 31/32	11	18 1/32	11 25/32	16 23/32	28 17/32	64 5/32	14 3/4	14 9/16	Rd360x36	98 19/32	31 3/32	40 17/32	11	29 29/32	17 1/32	15917
200	2000	15 23/32	12 3/8	20 1/4	13 3/16	18 11/16	31 15/32	71 27/32	16 23/32	16 5/16	Rd400x36	111	35 7/32	45 1/16	11 25/32	34 1/32	18 31/32	22476
250	2600	17 11/16	13 31/32	22 13/16	14 3/4	21 5/8	34 7/16	82 21/32	18 11/16	18 7/8	Rd480x36	125	39 9/16	49 25/32	12 19/32	38 3/8	21 1/4	31912
320	3200	19 21/32	15 23/32	25 9/16	16 23/32	24 19/32	37 3/8	94 3/32	20 27/32	21 5/8	Rd550x36	140 17/32	43 11/16	54 23/32	13 9/16	42 29/32	23 19/32	44996
400	4000	22 1/32	17 11/16	28 23/32	18 11/16	28 17/32	41 1/8	109 1/4	23 19/32	25 3/16	Rd640x36	158 1/4	48 7/32	59 13/16	14 9/16	48 1/32	26 3/8	64154

WLL based on V material grade.
 Tolerances: -0/+7% forging tolerance. Machining tolerances as per DIN15403.
 Modifications: Shank length (L). Further dimensions upon request.
 Hook section: b1xH; other sections can be design.

SHANK HOOKS BASED ON EN13001-3-5:2016

Single forged cargo hooks based on BS2903:1980 design

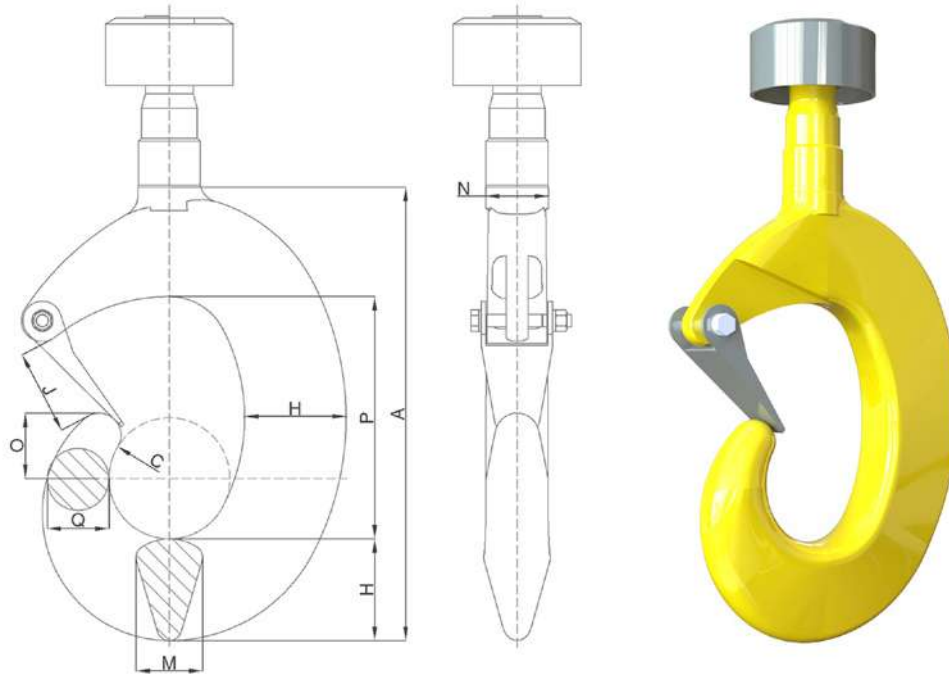


- WLL: from 10t to 50t. Larger ones upon request.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, V.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SINGLE FORGED CARGO HOOKS BASED ON BS2903:1980 DESIGN											
Overall dimensions (inch)											Weight
No	WLL (t)	C	A	P	H	J	M	O	Q	N	lbs
5	10	2 3/4	10 5/32	5 1/2	2 5/16	1 15/16	1 15/32	1 15/32	1 3/8	1 19/32	12
6,3	13	3 1/16	11 9/32	6 1/8	2 19/32	2 5/32	1 11/16	1 5/8	1 17/32	1 25/32	18
8	16	3 7/16	12 3/4	6 29/32	2 29/32	2 7/16	1 7/8	1 7/8	1 23/32	2	24
10	20	3 27/32	14 3/16	7 11/16	3 7/32	2 3/4	2 1/8	2 1/16	1 29/32	2 3/16	33
12,5	25	4 5/16	15 15/16	8 21/32	3 19/32	3 1/16	2 11/32	2 5/16	2 5/32	2 3/8	49
16	32	4 7/8	17 15/16	9 3/4	4 3/32	3 7/16	2 21/32	2 5/8	2 7/16	2 19/32	71
20	40	5 15/32	20 5/32	10 15/16	4 19/32	3 7/8	2 31/32	2 15/16	2 3/4	2 31/32	99
25	50	6 1/8	22 19/32	12 9/32	5 5/32	4 11/32	3 3/8	3 9/32	3 1/16	3 3/16	139

WLL: for V material grade.
Tolerances: -0/+7% forging tolerance.
Modifications: Upon request.

EYE HOOKS

Eye forged single hooks based on recognized european designs & Irizar designs
Eye forged single CHAIN hook based on DIN7540 design

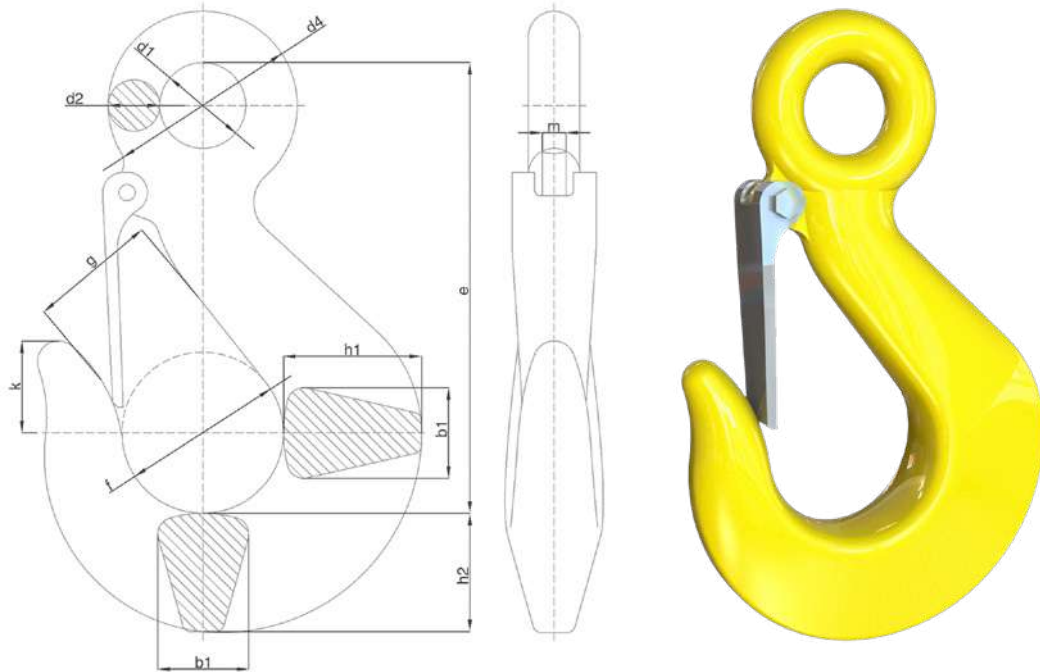


- WLL: from 3t to 400t (for super alloy materials).
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys.
Stainless steels available upon request.
- Mechanical properties: P, V.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

EYE FORGED SINGLE CHAIN HOOK BASED ON DIN7540 DESIGN													
Overall dimensions (inch)												Weight	
No	WLL (t)	b1	d1	d2	e	f	g	h1	h2	k	m	d4	lbs
34	40	3 ² / ₃₂	4 ¹ / ₂	2	18 ⁴ / ₃₂	5 ¹ / ₂	4 ⁹ / ₃₂	4 ²¹ / ₃₂	4 ² / ₃₂	3 ⁵ / ₃₂	²⁵ / ₃₂	8 ¹ / ₂	77
35	50	3 ¹ / ₂	5 ⁴ / ₃₂	2	20 ¹⁵ / ₃₂	6 ⁷ / ₃₂	4 ⁷ / ₈	5 ⁵ / ₁₆	4 ⁹ / ₁₆	3 ¹⁷ / ₃₂	²⁹ / ₃₂	9 ³ / ₃₂	112
36	63	3 ²⁹ / ₃₂	5 ²¹ / ₃₂	2 ¹⁷ / ₃₂	21 ⁹ / ₁₆	6 ¹⁵ / ₁₆	5 ⁷ / ₁₆	5 ¹⁵ / ₁₆	5 ⁴ / ₃₂	3 ³¹ / ₃₂	³¹ / ₃₂	10 ²³ / ₃₂	150
37	80	4 ¹¹ / ₃₂	4 ¹ / ₃₂	2 ¹⁵ / ₃₂	24 ¹ / ₃₂	7 ²⁵ / ₃₂	6 ³ / ₃₂	6 ⁵ / ₈	5 ²³ / ₃₂	4 ⁷ / ₁₆	1 ⁶ / ₃₂	8 ³¹ / ₃₂	176
38	100	4 ²⁹ / ₃₂	4 ⁹ / ₁₆	2 ²⁹ / ₃₂	25 ¹⁹ / ₃₂	8 ²⁷ / ₃₂	6 ⁷ / ₈	7 ¹¹ / ₁₆	6 ²⁵ / ₃₂	5 ⁸ / ₃₂	1 ¹ / ₂	10 ¹³ / ₃₂	276
39	150	6 ⁵ / ₁₆	5 ⁴ / ₃₂	3 ³ / ₈	30 ⁴ / ₃₂	9 ²⁷ / ₃₂	7 ⁷ / ₈	8 ²⁷ / ₃₂	7 ²⁷ / ₃₂	6 ⁵ / ₁₆	1 ¹ / ₂	11 ⁷ / ₈	551
40	200	7 ³ / ₃₂	5 ²⁹ / ₃₂	4 ¹ / ₃₂	33 ¹⁵ / ₃₂	10 ¹³ / ₁₆	8 ²⁷ / ₃₂	10 ⁸ / ₃₂	9 ¹¹ / ₃₂	7 ¹¹ / ₁₆	1 ²⁵ / ₃₂	13 ¹⁵ / ₁₆	805
41	250	7 ⁷ / ₈	6 ¹¹ / ₁₆	4 ²³ / ₃₂	36 ¹⁷ / ₃₂	12 ⁷ / ₃₂	10 ¹ / ₃₂	11 ¹³ / ₃₂	10 ¹⁹ / ₃₂	8 ⁹ / ₃₂	1 ²⁵ / ₃₂	16 ⁵ / ₃₂	1135
42	300	8 ²¹ / ₃₂	7 ¹⁵ / ₃₂	5 ¹ / ₂	41 ¹³ / ₃₂	13 ²⁵ / ₃₂	11 ¹³ / ₃₂	13	12 ⁶ / ₃₂	9 ⁷ / ₁₆	1 ²⁵ / ₃₂	18 ¹ / ₂	1609
43	400	9 ⁷ / ₁₆	8 ⁹ / ₃₂	6 ¹¹ / ₁₆	47 ² / ₃₂	15 ³ / ₄	12 ¹⁹ / ₃₂	14 ³¹ / ₃₂	13 ¹⁹ / ₃₂	10 ⁵ / ₈	1 ²⁵ / ₃₂	21 ²¹ / ₃₂	2326

Smaller sizes upon request.
WLL: for V material grade.
Tolerances: -0/+7% forging tolerance.
Modifications: Upon request.

EYE HOOKS

Eye forged single hooks based on recognized european designs & Irizar designs
Eye forged single FIX hook based on IRIZAR DESIGN

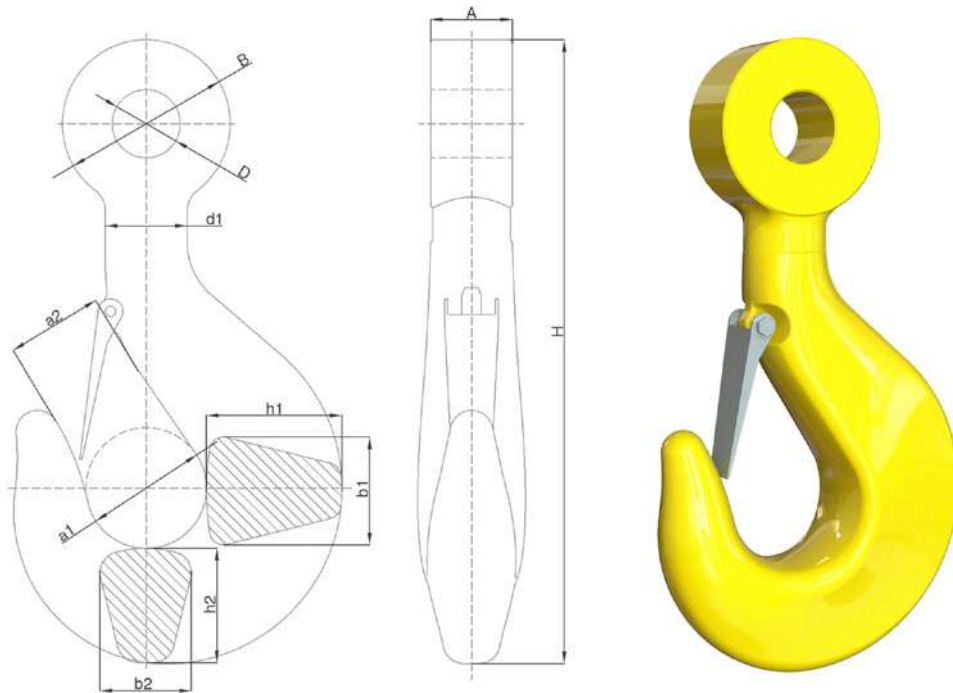


- WLL: from 80t to 2.000t. Larger ones upon request.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, V.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

EYE FORGED SINGLE FIX HOOK BASED ON IRIZAR DESIGN														
Overall dimensions (inch)														Weight
No	WLL (t)	MBL (t)	a1	a2	b1	b2	h1	h2	d1	A	D	B	H	lbs
16	80	320	5 1/2	4 13/32	4 29/32	4 5/32	6 9/32	5 3/16	3 23/32	4 5/16	3 13/32	7 1/16	29 11/32	212
20	100	400	6 9/32	4 29/32	5 1/2	4 5/8	7 1/16	5 7/8	4 3/32	4 5/8	3 29/32	8 1/4	31 15/16	302
25	120	480	7 1/16	5 1/2	6 9/32	5 3/16	7 27/32	6 11/16	4 5/8	5 1/4	3 29/32	8 1/4	36 15/32	419
32	150	600	7 27/32	6 9/32	7 1/16	5 7/8	8 13/16	7 15/32	5 3/16	5 1/2	4 15/32	9 7/16	41 13/32	600
40	200	800	8 13/16	7 1/16	7 27/32	6 11/16	9 13/16	8 11/32	5 7/8	5 7/8	5 3/8	11 13/32	47 9/32	875
50	250	1000	9 13/16	7 27/32	8 13/16	7 15/32	11	9 9/32	6 11/16	6 11/16	5 25/32	12 3/16	51 23/32	1171
63	300	1200	11	8 13/16	9 13/16	8 11/32	12 3/8	10 13/32	7 15/32	7 15/32	6 7/32	12 31/32	57	1609
80	400	1600	12 3/8	9 13/16	11	9 9/32	13 31/32	11 25/32	8 11/32	8 1/16	7 7/32	14 15/16	66 5/16	2277
100	500	2000	13 31/32	11	12 3/8	10 13/32	15 23/32	13 3/16	9 9/32	9 1/32	7 5/8	15 23/32	73 21/32	3153
125	600	2400	15 23/32	12 3/8	13 31/32	11 25/32	17 11/16	14 3/4	10 13/32	10 1/32	8 7/16	17 11/16	81 11/16	4405
160	800	3200	17 11/16	13 31/32	15 23/32	13 3/16	19 21/32	16 23/32	11 25/32	11	9 7/16	19 21/32	90 5/16	6142
200	1000	4000	19 21/32	15 23/32	17 11/16	14 3/4	22 1/32	18 11/16	13 3/16	12 19/32	11	22 13/16	96 7/16	8527
250	1250	5000	22 1/32	17 11/16	19 21/32	16 23/32	24 25/32	20 27/32	14 3/4	13 31/32	12 3/8	25 9/16	110 5/8	11998
320	1550	6200	24 25/32	19 21/32	22 1/32	18 11/16	27 15/16	22 13/16	16 23/32	13 31/32	13 3/16	26 3/4	120 15/32	15942
400	1800	7200	27 15/16	22 1/32	24 25/32	20 27/32	31 15/32	24 25/32	18 11/16	16 1/8	15 17/32	29 1/2	135 1/32	22035

WLL: for V material grade.
 Tolerances: -0/+7% forging tolerance.
 Modifications: H, D and A. Others upon request.

EYE HOOKS

Eye forged single hooks based on recognized european designs & Irizar designs
Eye forged single CARGO hook based on DIN82017 design

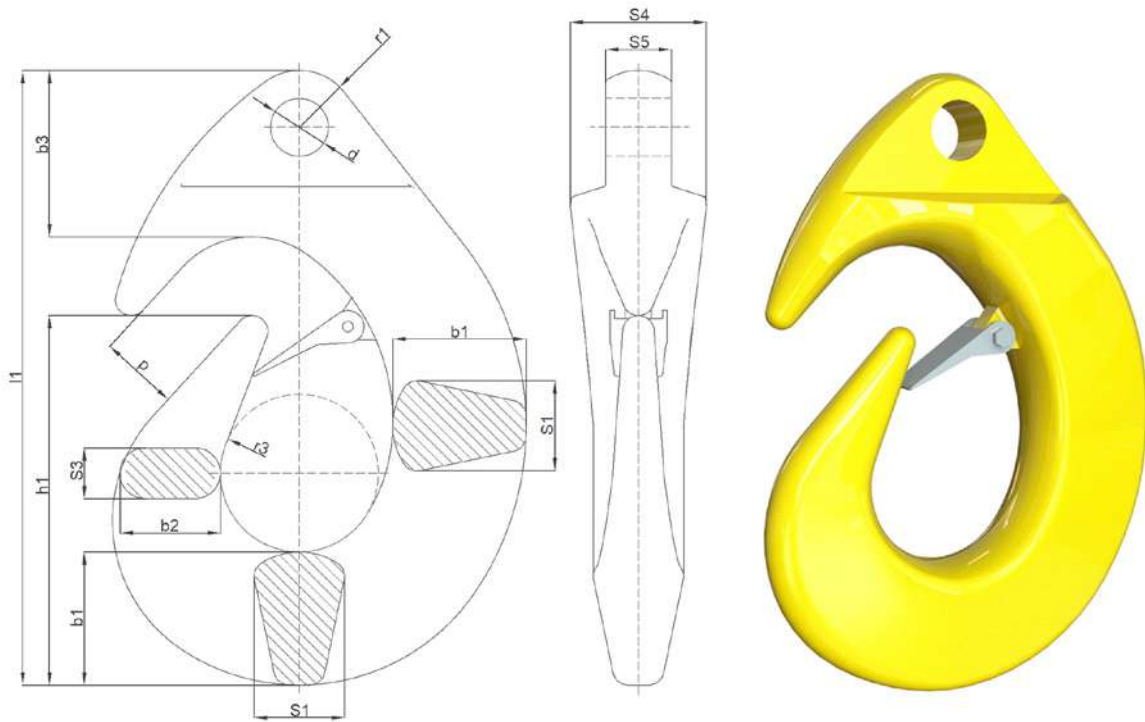


- WLL: from 10t to 100t. Larger ones upon request.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, V.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

EYE FORGED SINGLE CARGO HOOK BASED ON DIN82017 DESIGN																
Overall dimensions (inch)															Weight	
No	WLL (t)	b1	b2	b3	d	h1	l1	p	r1	r3	S1	S3	S4	S5		lbs
														A	B	
1	2	1 5/8	1 9/32	1 15/16	1 1/16	4 19/32	7 17/32	3 1/2	11/16	3 1/2	1 3/32	5/8	1 9/16	2 3/2	5/8	7
2	4	2 1/8	1 5/8	2 11/16	1 5/16	5 7/8	9 7/8	1 1/4	3 1/2	1 1/4	1 13/32	2 5/8	2 9/32	1 1/16	2 7/2	15
3	6	2 21/32	2 1/16	3 7/32	1 5/32	7 3/8	12 3/16	1 9/16	1 5/32	1 9/16	1 25/32	1	2 13/16	1 3/8	1 3/32	24
5	10	3 9/32	2 19/32	4 1/32	1 17/32	9 3/16	15 7/32	1 15/16	1 15/32	1 15/16	2 3/16	1 1/4	3 19/32	1 23/32	1 3/8	44
6	12	3 11/16	2 27/32	4 15/32	1 5/8	10 5/16	17	2 3/16	1 11/16	2 3/16	2 1/2	1 13/32	4	1 15/16	1 9/16	60
8	16	4 5/32	3 1/4	5 1/16	1 7/8	11 19/32	19 5/32	2 15/32	1 7/8	2 15/32	2 13/16	1 9/16	4 1/2	2 3/16	1 3/4	84
10	20	4 5/8	3 19/32	5 7/8	2 1/32	12 29/32	21 9/16	2 3/4	2 5/32	2 3/4	3 1/8	1 3/4	4 29/32	2 3/8	1 15/16	130
12	24	5 5/16	4 1/8	6 3/4	2 3/16	14 3/4	24 21/32	3 1/8	2 11/32	3 1/8	3 9/16	2	5 13/32	2 21/32	2 5/32	172
16	32	5 31/32	4 15/32	7 15/32	2 19/32	16 19/32	27 5/8	3 17/32	2 17/32	3 17/32	4 1/32	2 9/32	6 3/32	2 15/16	2 11/32	260
20	40	6 11/16	5 7/32	7 15/16	2 29/32	18 1/2	30 3/8	3 29/32	2 3/4	3 29/32	4 1/2	2 1/2	6 3/4	3 9/32	2 17/32	366
25	50	7 15/32	6	8 21/32	3 1/16	20 17/32	33 17/32	4 5/16	2 15/16	4 5/16	5 1/32	2 13/16	7 17/32	3 11/16	2 3/4	551
32	65	7 31/32	6 9/16	9 21/32	3 3/8	22 1/8	36 17/32	4 23/32	3 11/32	4 23/32	5 3/8	3 1/32	8 1/32	4	3 1/8	860
40	80	8 27/32	7 7/16	10 11/16	3 3/4	24 5/16	40 5/32	5 3/32	3 23/32	5 3/32	5 31/32	3 11/32	8 27/32	4 19/32	3 17/32	1345

WLL: for V material grade.
 Tolerances: -0/+7% forging tolerance.
 Modifications: H, D and A. Others upon request.

EYE HOOKS

Eye forged ramshorn hooks based on recognized european designs & Irizar designs
Eye forged Ramshorn FIX hook based on IRIZAR design

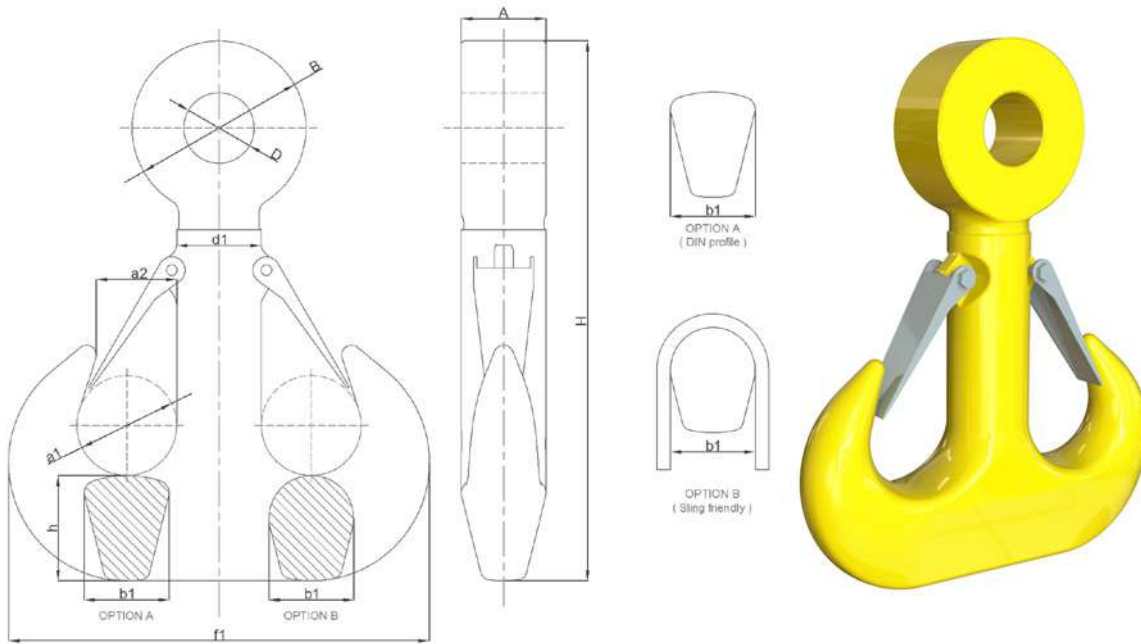


- WLL: from 80t to 2.000t. Larger ones upon request.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys.
Stainless steels available upon request.
- Mechanical properties: P, V.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

EYE FORGED RAMSHORN FIX HOOK BASED ON IRIZAR DESIGN													
Overall dimensions (inch)													Weight
No	WLL (t)	MBL (t)	a1	a2	b1	h	d1	f1	A	D	B	H	lbs
16	80	320	4 ¹³ / ₃₂	3 ¹⁷ / ₃₂	3 ³ / ₄	4 ²¹ / ₃₂	3 ³ / ₄	18 ¹⁷ / ₃₂	4 ¹¹ / ₃₂	3 ⁷ / ₁₆	7 ³ / ₃₂	24 ¹⁹ / ₃₂	170
20	100	400	4 ²⁹ / ₃₂	3 ¹⁵ / ₁₆	4 ⁶ / ₃₂	5 ⁶ / ₃₂	4 ⁶ / ₃₂	20 ²⁹ / ₃₂	4 ²¹ / ₃₂	3 ¹⁵ / ₁₆	8 ⁹ / ₃₂	28 ² / ₃₂	249
25	120	480	5 ¹ / ₂	4 ¹³ / ₃₂	4 ²¹ / ₃₂	5 ²⁹ / ₃₂	4 ²¹ / ₃₂	23 ¹⁷ / ₃₂	5 ⁹ / ₃₂	3 ¹⁵ / ₁₆	8 ⁹ / ₃₂	31 ¹⁵ / ₃₂	337
32	150	600	6 ⁵ / ₁₆	4 ²⁹ / ₃₂	5 ⁶ / ₃₂	6 ¹¹ / ₁₆	5 ⁶ / ₃₂	26 ¹⁵ / ₃₂	5 ¹ / ₂	4 ¹ / ₂	9 ⁷ / ₁₆	34 ¹¹ / ₃₂	470
40	200	800	7 ³ / ₃₂	5 ¹ / ₂	5 ²⁹ / ₃₂	7 ¹⁵ / ₃₂	5 ²⁹ / ₃₂	29 ¹¹ / ₁₆	5 ²⁹ / ₃₂	5 ¹³ / ₃₂	11 ¹³ / ₃₂	39 ¹⁷ / ₃₂	677
50	250	1000	7 ⁷ / ₈	6 ⁵ / ₁₆	6 ¹¹ / ₁₆	8 ¹¹ / ₃₂	6 ¹¹ / ₁₆	33 ⁵ / ₃₂	6 ¹¹ / ₁₆	5 ²⁵ / ₃₂	12 ⁷ / ₃₂	43 ²⁵ / ₃₂	926
63	300	1200	8 ¹³ / ₁₆	7 ³ / ₃₂	7 ¹⁵ / ₃₂	9 ⁹ / ₃₂	7 ¹⁵ / ₃₂	37 ⁵ / ₃₂	7 ¹⁵ / ₃₂	6 ⁷ / ₃₂	13	47 ⁵ / ₈	1272
80	400	1600	9 ²⁷ / ₃₂	7 ⁷ / ₈	8 ¹¹ / ₃₂	10 ⁷ / ₁₆	8 ¹¹ / ₃₂	41 ¹³ / ₁₆	8 ² / ₃₂	7 ⁹ / ₃₂	14 ³¹ / ₃₂	55 ⁷ / ₁₆	1832
100	500	2000	11 ¹ / ₃₂	8 ¹³ / ₁₆	9 ⁹ / ₃₂	11 ¹³ / ₁₆	9 ⁹ / ₃₂	46 ¹¹ / ₁₆	9 ² / ₃₂	7 ⁵ / ₈	15 ³ / ₄	60 ¹⁵ / ₃₂	2416
125	600	2400	12 ¹³ / ₃₂	9 ²⁷ / ₃₂	10 ⁷ / ₁₆	13 ⁶ / ₃₂	10 ⁷ / ₁₆	52 ³ / ₈	10 ¹ / ₃₂	8 ¹⁵ / ₃₂	17 ²³ / ₃₂	67 ⁸ / ₃₂	3474
160	800	3200	13 ³¹ / ₃₂	11 ¹ / ₃₂	11 ¹³ / ₁₆	14 ³ / ₄	11 ¹³ / ₁₆	59 ⁹ / ₃₂	11 ¹ / ₃₂	9 ⁷ / ₁₆	19 ¹¹ / ₁₆	73 ³¹ / ₃₂	4822
200	1000	4000	15 ³ / ₄	12 ¹³ / ₃₂	13 ⁶ / ₃₂	16 ²³ / ₃₂	13 ⁶ / ₃₂	66 ¹¹ / ₃₂	12 ¹⁹ / ₃₂	11 ¹ / ₃₂	22 ²⁷ / ₃₂	83 ²¹ / ₃₂	6753
250	1250	5000	17 ²³ / ₃₂	13 ³¹ / ₃₂	14 ³ / ₄	18 ¹¹ / ₁₆	14 ³ / ₄	74 ⁷ / ₃₂	13 ³¹ / ₃₂	12 ¹³ / ₃₂	25 ¹⁹ / ₃₂	88 ⁶ / ₃₂	8977
320	1550	6200	19 ¹¹ / ₁₆	15 ³ / ₄	16 ²³ / ₃₂	20 ⁷ / ₈	16 ²³ / ₃₂	83 ²¹ / ₃₂	13 ³¹ / ₃₂	13 ⁶ / ₃₂	26 ²⁵ / ₃₂	94 ³ / ₃₂	12196
400	1800	7200	22 ² / ₃₂	17 ²³ / ₃₂	18 ¹¹ / ₁₆	23 ⁵ / ₈	18 ¹¹ / ₁₆	93 ¹ / ₂	16 ⁵ / ₃₂	15 ⁹ / ₁₆	29 ¹⁷ / ₃₂	100 ⁶ / ₃₂	16592

WLL: for V material grade.
Tolerances: -0/+7% forging tolerance.
Modifications: H, D and A. Others upon request.

EYE HOOKS

Eye forged ramshorn hooks based on recognized european designs & Irizar designs
Eye forged Ramshorn B hook based on IRIZAR design

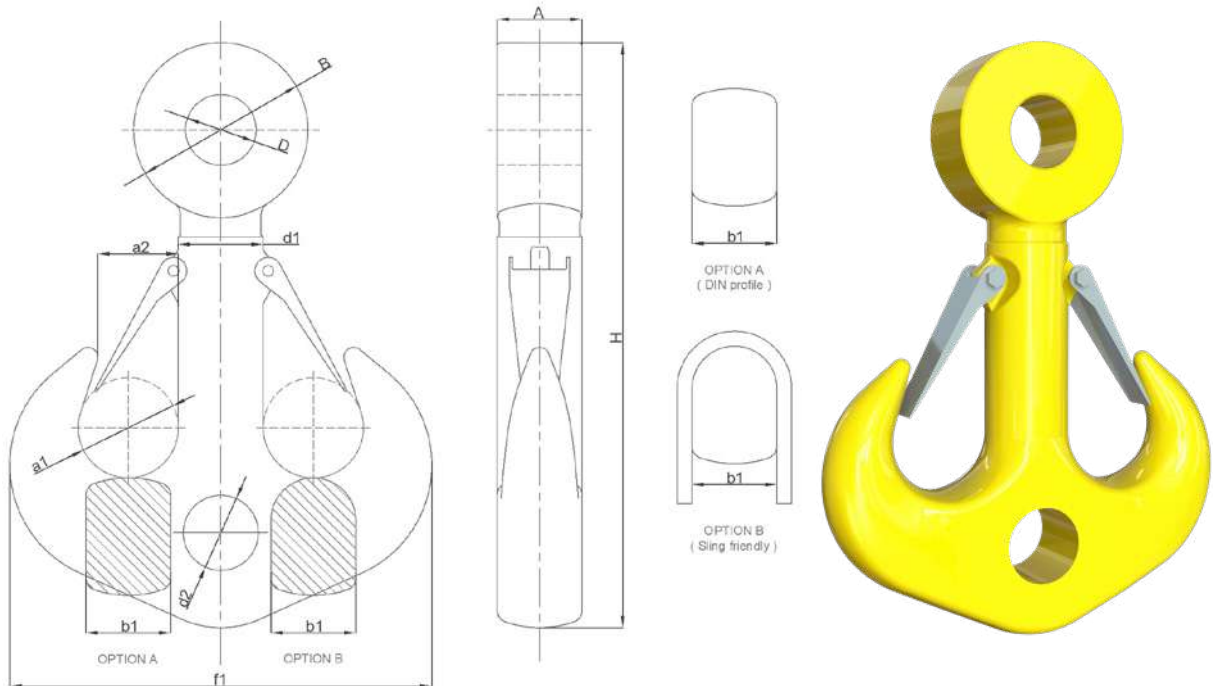


- WLL: from 80t to 2.000t (bottom hole included).
Larger ones upon request.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys.
Stainless steels available upon request.
- Mechanical properties: P, V.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or
Breaking Test available upon request.

EYE FORGED RAMSHORN B HOOK BASED ON IRIZAR DESIGN													
Overall dimensions (inch)													Weight
No	WLL (t)	MBL (t)	a1	a2	b1	d1	d2H15	f1	A	D	B	H	lbs
16	80	320	4 ¹³ / ₃₂	3 ¹⁷ / ₃₂	3 ²³ / ₃₂	3 ²³ / ₃₂	3 ³ / ₈	18 ¹⁷ / ₃₂	4 ⁵ / ₁₆	3 ¹³ / ₃₂	7 ¹ / ₁₆	26 ¹¹ / ₁₆	185
20	100	400	4 ²⁹ / ₃₂	3 ²⁹ / ₃₂	4 ⁵ / ₃₂	4 ⁵ / ₃₂	3 ³ / ₄	20 ⁷ / ₈	4 ⁵ / ₈	3 ²⁹ / ₃₂	8 ¹ / ₄	30 ¹¹ / ₃₂	276
25	120	480	5 ¹ / ₂	4 ¹³ / ₃₂	4 ⁵ / ₈	4 ⁵ / ₈	4 ⁵ / ₃₂	23 ¹⁷ / ₃₂	5 ¹ / ₄	3 ²⁹ / ₃₂	8 ¹ / ₄	33 ²⁹ / ₃₂	373
32	150	600	6 ⁹ / ₃₂	4 ²⁹ / ₃₂	5 ³ / ₁₆	5 ³ / ₁₆	4 ⁹ / ₁₆	26 ⁷ / ₁₆	5 ¹ / ₂	4 ¹⁵ / ₃₂	9 ⁷ / ₁₆	36 ²⁹ / ₃₂	520
40	200	800	7 ¹ / ₁₆	5 ¹ / ₂	5 ⁷ / ₈	5 ⁷ / ₈	5 ⁵ / ₃₂	29 ²¹ / ₃₂	5 ⁷ / ₈	5 ³ / ₈	11 ¹³ / ₃₂	42 ¹ / ₂	778
50	250	1000	7 ²¹ / ₃₂	6 ⁹ / ₃₂	6 ¹¹ / ₁₆	6 ¹¹ / ₁₆	5 ²³ / ₃₂	33 ¹ / ₈	6 ¹¹ / ₁₆	5 ²⁵ / ₃₂	12 ³ / ₁₆	47 ⁹ / ₃₂	1032
63	300	1200	8 ¹³ / ₁₆	7 ¹ / ₁₆	7 ¹⁵ / ₃₂	7 ¹⁵ / ₃₂	6 ¹⁹ / ₃₂	37 ⁵ / ₃₂	7 ¹⁵ / ₃₂	6 ⁷ / ₃₂	12 ³¹ / ₃₂	51 ¹⁵ / ₃₂	1396
80	400	1600	9 ¹³ / ₁₆	7 ²⁷ / ₃₂	8 ¹¹ / ₃₂	8 ¹¹ / ₃₂	7 ³ / ₈	41 ²⁵ / ₃₂	8 ¹ / ₁₆	7 ⁷ / ₃₂	14 ¹⁵ / ₁₆	59 ³ / ₄	1980
100	500	2000	11	8 ¹³ / ₁₆	9 ⁹ / ₃₂	9 ⁹ / ₃₂	8 ³ / ₁₆	46 ¹¹ / ₁₆	9 ¹ / ₃₂	7 ⁵ / ₈	15 ²³ / ₃₂	65 ¹¹ / ₃₂	2734
125	600	2400	12 ³ / ₈	9 ¹³ / ₁₆	10 ¹³ / ₃₂	10 ¹³ / ₃₂	9 ¹ / ₄	52 ¹¹ / ₃₂	10 ¹ / ₃₂	8 ⁷ / ₁₆	17 ¹¹ / ₁₆	72 ³ / ₄	3814
160	800	3200	13 ³¹ / ₃₂	11	11 ²⁵ / ₃₂	11 ²⁵ / ₃₂	10 ⁷ / ₃₂	59 ¹ / ₄	11	9 ⁷ / ₁₆	19 ²¹ / ₃₂	80 ¹ / ₁₆	5384
200	1000	4000	15 ²³ / ₃₂	12 ³ / ₈	13 ³ / ₁₆	13 ³ / ₁₆	11 ³ / ₃₂	66 ⁵ / ₁₆	12 ¹⁹ / ₃₂	11	22 ¹³ / ₁₆	90 ¹⁷ / ₃₂	7694
250	1250	5000	17 ¹¹ / ₁₆	13 ³¹ / ₃₂	14 ³ / ₄	14 ³ / ₄	12 ⁹ / ₃₂	74 ³ / ₁₆	13 ³¹ / ₃₂	12 ³ / ₈	25 ⁹ / ₁₆	100 ¹ / ₂	10703
320	1550	6200	19 ²¹ / ₃₂	15 ²³ / ₃₂	16 ²³ / ₃₂	16 ²³ / ₃₂	12 ³¹ / ₃₂	83 ²¹ / ₃₂	13 ³¹ / ₃₂	13 ³ / ₁₆	26 ³ / ₄	108 ⁷ / ₁₆	15322
400	1800	7200	22 ¹ / ₃₂	17 ¹¹ / ₁₆	18 ¹¹ / ₁₆	18 ¹¹ / ₁₆	14 ⁹ / ₁₆	93 ¹ / ₂	16 ¹ / ₈	15 ¹⁷ / ₃₂	29 ¹ / ₂	117 ⁵ / ₁₆	21680

WLL: for V material grade.
Tolerances: -0/+7% forging tolerance.
Modifications: H, D and A. Others upon request.

EYE HOOKS

Eye forged ramshorn hooks based on recognized european designs & Irizar designs
Eye forged Ramshorn FORK hook based on DIN82019 design

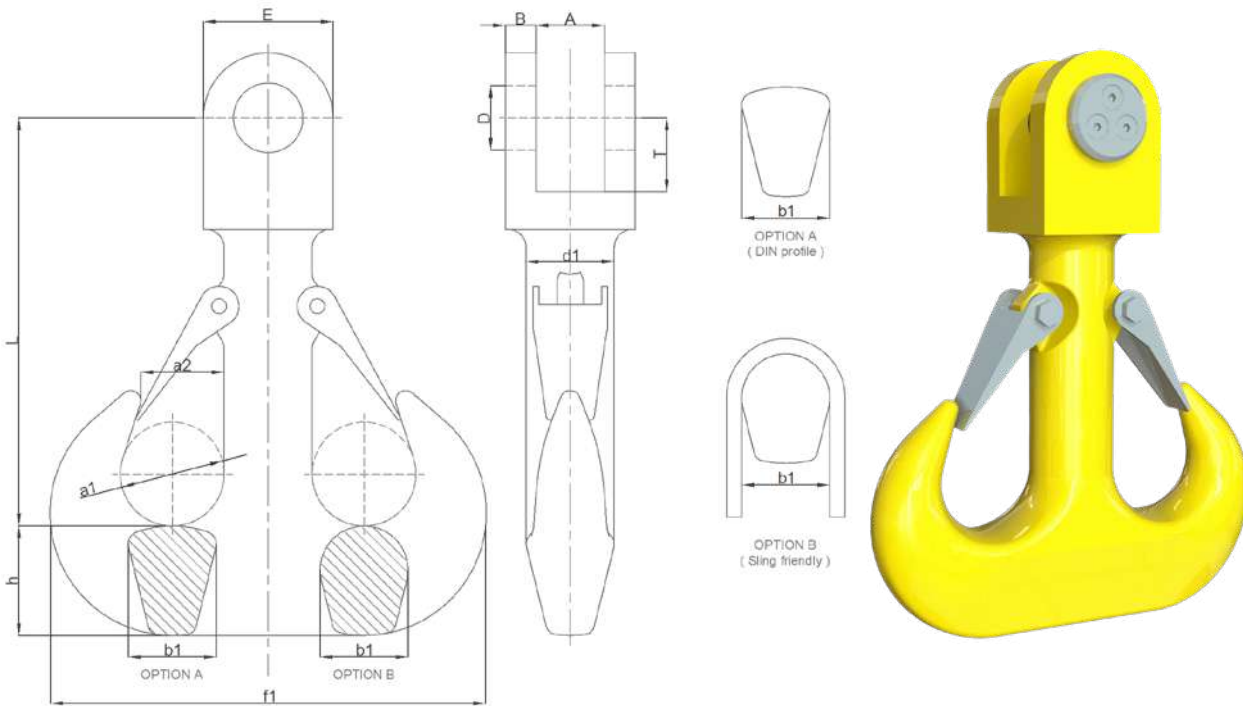

- WLL: from 80t to 2.000t. Larger ones upon request.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, V.
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

EYE FORGED RAMSHORN FORK HOOK BASED ON DIN82019 DESIGN														
Overall dimensions (inch)														Weight
No	WLL (t)	MBL (t)	a1	a2	h	d1	f1	A	B	D	L	E	T	lbs
16	80	320	4 ¹³ / ₃₂	3 ¹⁷ / ₃₂	4 ⁵ / ₈	3 ²³ / ₃₂	18 ¹⁷ / ₃₂	4 ²³ / ₃₂	2 ³ / ₄	3 ¹ / ₈	19 ⁹ / ₃₂	6 ³ / ₃₂	4 ²³ / ₃₂	240
20	100	400	4 ²⁹ / ₃₂	3 ²⁹ / ₃₂	5 ³ / ₁₆	4 ⁵ / ₃₂	20 ⁷ / ₈	5 ⁵ / ₁₆	3 ¹ / ₈	3 ¹¹ / ₃₂	21 ⁵ / ₈	6 ¹¹ / ₁₆	4 ²⁹ / ₃₂	351
25	120	480	5 ¹ / ₂	4 ¹³ / ₃₂	5 ⁷ / ₈	4 ⁵ / ₈	23 ¹⁷ / ₃₂	5 ⁷ / ₈	3 ¹ / ₂	3 ²³ / ₃₂	24 ⁹ / ₁₆	7 ²⁷ / ₃₂	5 ⁹ / ₁₆	500
32	150	600	6 ⁹ / ₃₂	4 ²⁹ / ₃₂	6 ¹¹ / ₁₆	5 ³ / ₁₆	26 ⁷ / ₁₆	6 ¹¹ / ₁₆	4	4 ⁵ / ₁₆	28 ¹¹ / ₃₂	9 ¹ / ₃₂	6 ¹⁵ / ₃₂	756
40	200	800	7 ¹ / ₁₆	5 ¹ / ₂	7 ¹⁵ / ₃₂	5 ⁷ / ₈	29 ²¹ / ₃₂	7 ¹ / ₁₆	4 ²³ / ₃₂	4 ²⁹ / ₃₂	32 ¹ / ₁₆	10 ⁷ / ₃₂	7 ⁹ / ₃₂	1093
50	250	1000	7 ²⁷ / ₃₂	6 ⁹ / ₃₂	8 ¹¹ / ₃₂	6 ¹¹ / ₁₆	33 ¹ / ₈	8 ¹ / ₁₆	4 ²⁹ / ₃₂	5 ¹ / ₂	35 ¹³ / ₃₂	10 ⁷ / ₃₂	8 ¹ / ₄	1356
63	300	1200	8 ¹³ / ₁₆	7 ¹ / ₁₆	9 ⁹ / ₃₂	7 ¹⁵ / ₃₂	37 ⁵ / ₃₂	8 ¹ / ₁₆	5 ³ / ₃₂	5 ⁷ / ₈	39 ⁹ / ₁₆	12	8 ²⁷ / ₃₂	1865
80	400	1600	9 ¹³ / ₁₆	7 ²⁷ / ₃₂	10 ¹³ / ₃₂	8 ¹¹ / ₃₂	41 ²⁵ / ₃₂	9 ¹ / ₃₂	6 ¹⁵ / ₃₂	6 ⁷ / ₈	44 ¹⁵ / ₃₂	13 ³ / ₄	10 ⁷ / ₃₂	2886
100	500	2000	11	8 ¹³ / ₁₆	11 ²⁵ / ₃₂	9 ⁹ / ₃₂	46 ¹¹ / ₁₆	10 ¹ / ₃₂	7 ¹ / ₁₆	7 ⁹ / ₃₂	49 ¹⁹ / ₃₂	14 ⁹ / ₁₆	10 ¹³ / ₁₆	3785
125	600	2400	12 ³ / ₈	9 ¹³ / ₁₆	13 ³ / ₁₆	10 ¹³ / ₃₂	52 ¹¹ / ₃₂	11 ⁷ / ₃₂	7 ²¹ / ₃₂	8 ¹ / ₁₆	54 ²³ / ₃₂	15 ¹⁵ / ₁₆	11 ²⁵ / ₃₂	5126
160	800	3200	13 ³¹ / ₃₂	11	14 ³ / ₄	11 ²⁵ / ₃₂	59 ¹ / ₄	12 ³ / ₁₆	8 ¹ / ₄	8 ⁷ / ₁₆	60 ¹ / ₃₂	17 ¹ / ₈	12 ¹⁹ / ₃₂	6792
200	1000	4000	15 ²³ / ₃₂	12 ³ / ₈	16 ²³ / ₃₂	13 ³ / ₁₆	66 ⁵ / ₁₆	13 ³ / ₄	9 ¹ / ₃₂	9 ⁷ / ₁₆	65 ¹¹ / ₃₂	18 ⁷ / ₈	14 ⁵ / ₃₂	9365
250	1250	5000	17 ¹¹ / ₁₆	13 ³¹ / ₃₂	18 ¹¹ / ₁₆	14 ³ / ₄	74 ³ / ₁₆	14 ⁹ / ₁₆	10 ¹⁵ / ₁₆	10 ⁵ / ₈	71 ⁷ / ₁₆	23 ⁷ / ₃₂	15 ¹⁵ / ₁₆	14804
320	1550	6200	19 ²¹ / ₃₂	15 ²³ / ₃₂	20 ²⁷ / ₃₂	16 ²³ / ₃₂	83 ²¹ / ₃₂	14 ⁹ / ₁₆	11	11 ¹³ / ₃₂	77 ¹⁵ / ₁₆	24	17 ¹ / ₈	17831
400	1800	7200	22 ¹ / ₃₂	17 ¹¹ / ₁₆	23 ¹⁹ / ₃₂	18 ¹¹ / ₁₆	93 ¹ / ₂	16 ²⁹ / ₃₂	11 ²⁵ / ₃₂	12 ³¹ / ₃₂	93 ¹ / ₂	25 ³¹ / ₃₂	19 ¹⁵ / ₃₂	24692

WLL: for V material grade.
Tolerances: -0/+7% forging tolerance.
Modifications: Upon request.

CUSTOM HOOKS

Forged heavy duty hooks

Irizar Forge team can accommodate any forged hook to the specific lifting operation the market is ready to operate up to 4.000t, from safety, design, material strength and certification point of view.




- WLL: up to 4.000t.
- Hook forged and heat treated, fully machined and fitted & assembled.
- Material: carbon, alloys and super alloys. Stainless steels available upon request.
- Mechanical properties: P, T, V.
- Safety Factor: min. 4:1 with the highest material grade.
- General Tolerances: -0/+7% forged parts and Machining tolerances as per DIN15403.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

VARIETY OF SAFETY LATCHES FOR CRANE HOOKS



Standard latch

- Material: carbon & stainless steels.
- Suitable for: Single & Ramshorn hooks.
- Test: FAT upon request.

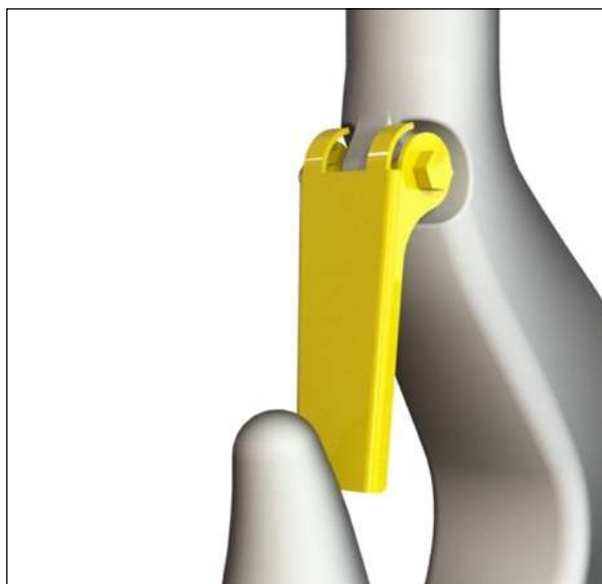

Gravity latch

- Material: carbon & stainless steels.
- Suitable for: Single hooks only.
- Test: FAT upon request.

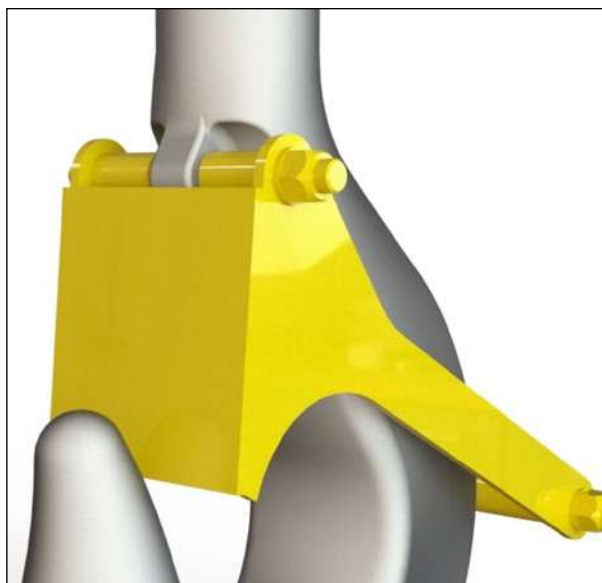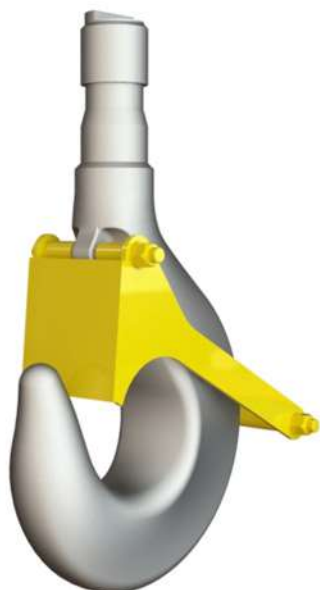

VARIETY OF SAFETY LATCHES FOR CRANE HOOKS


Locking latch

- Material: carbon & stainless steels.
- Suitable for: Single & Ramshorn hooks.
- Test: FAT upon request.




Fix latch

- Material: carbon & stainless steels.
- Suitable for: Single & Ramshorn hooks.
- Test: FAT upon request.

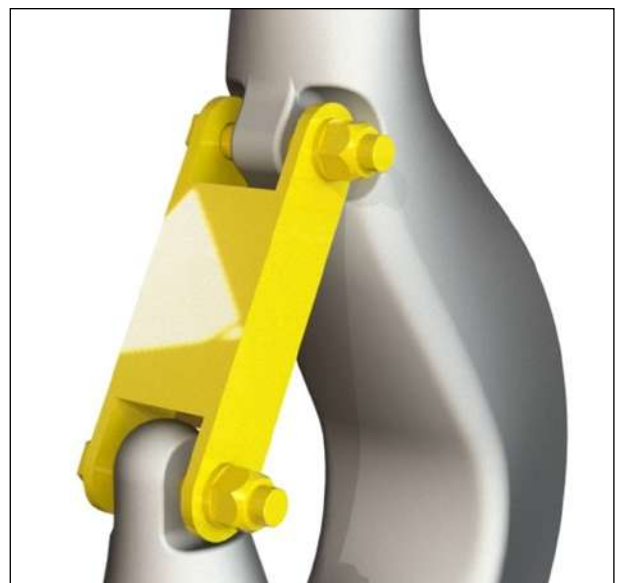



Easy-going latch

- Material: carbon & stainless steels.
- Suitable for: Single & Ramshorn hooks.
- Test: FAT upon request.

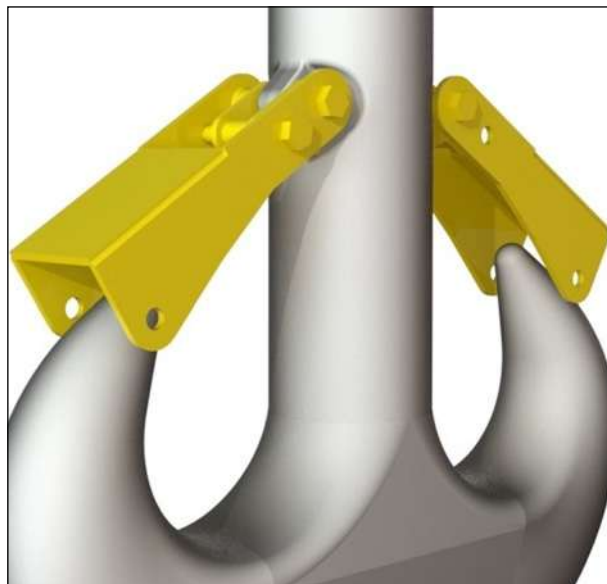

Chain latch

- Material: carbon & stainless steels.
- Suitable for: Quad & Ramshorn hooks.
- Test: FAT upon request.

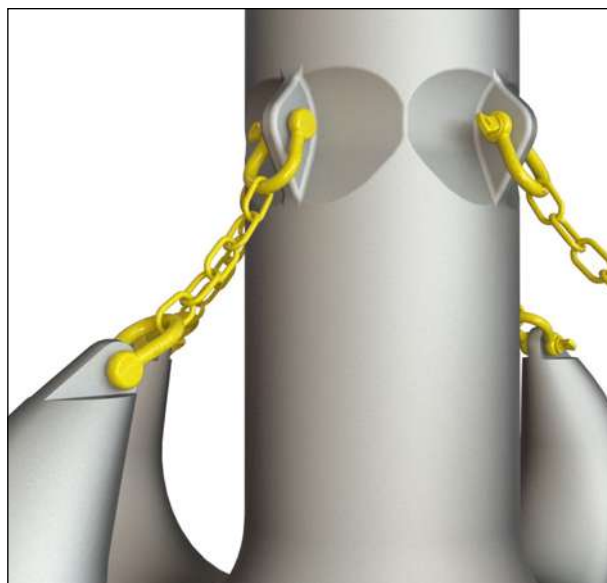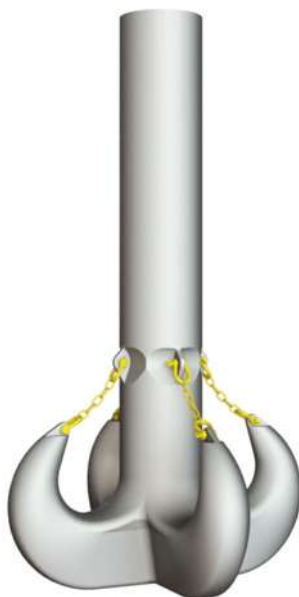

HOOK APERTURE

Double hook

Hook aperture width with opened safety latch



Double hook no. DIN 15402	Min. "a" (inch)
8	1 ¹⁵ / ₁₆
10	2 ¹ / ₄
12	2 ³ / ₈
16	2 ²³ / ₃₂
20	3 ⁷ / ₃₂
25	3 ⁵ / ₈
32	4 ¹ / ₃₂
40	4 ¹⁷ / ₃₂
50	5 ⁵ / ₁₆
63	6 ¹ / ₂

Single hook

Hook aperture width with opened safety latch



Single hook no. DIN 15401	Min. "a" (inch)
1.6	1 ¹⁷ / ₃₂
2.5	1 ⁵ / ₈
4	1 ⁷ / ₈
5	2 ⁵ / ₃₂
6	2 ⁹ / ₃₂
8	2 ²³ / ₃₂
10	2 ²⁹ / ₃₂
12	3 ⁵ / ₁₆
16	3 ¹¹ / ₁₆
20	4 ¹ / ₄
25	5 ¹ / ₈
32	5 ¹ / ₂
40	6 ¹¹ / ₁₆
50	7 ³ / ₈
63	8 ¹ / ₁₆
80	9 ⁷ / ₁₆



2. CRANE BLOCKS

Intro


The Crane block or Hook Block is considered the complete component of the hoist and it's linked to the crane by the rope pulleys/sheaves through the rope.

Its design depends on the crane purpose and concept design whereas rope pulleys or sheaves and hook assembly design will be the key factor to achieve customer requirements and expectations. Using the previous pages for the right hook selection, sheaves must keep a proportional relation and must be symmetric to the gravity center of the Crane Block. Last decades sheaves diameter has been decreased thanks to wire ropes advanced technology using more flexible wire ropes,

reducing rope diameter and increasing strength thanks to very advanced materials, having decreased the historical factor (rope diameter (d_1) x factor = sheave diameter (D)). Please see Chapter 7, Rope Accessories/Sheaves.

The number of sheaves in the Hook Block will depend on the total WLL of the Hook Block and individual sheave WLL: falls is called to the twisted rope, whereas 1 sheave has always 2 falls, 2 sheaves have 4 falls.

The fall must have a certain **angle for safety reasons**: regularly the maximum angle is regulated by International Standards, being the most popular ones as shown below:

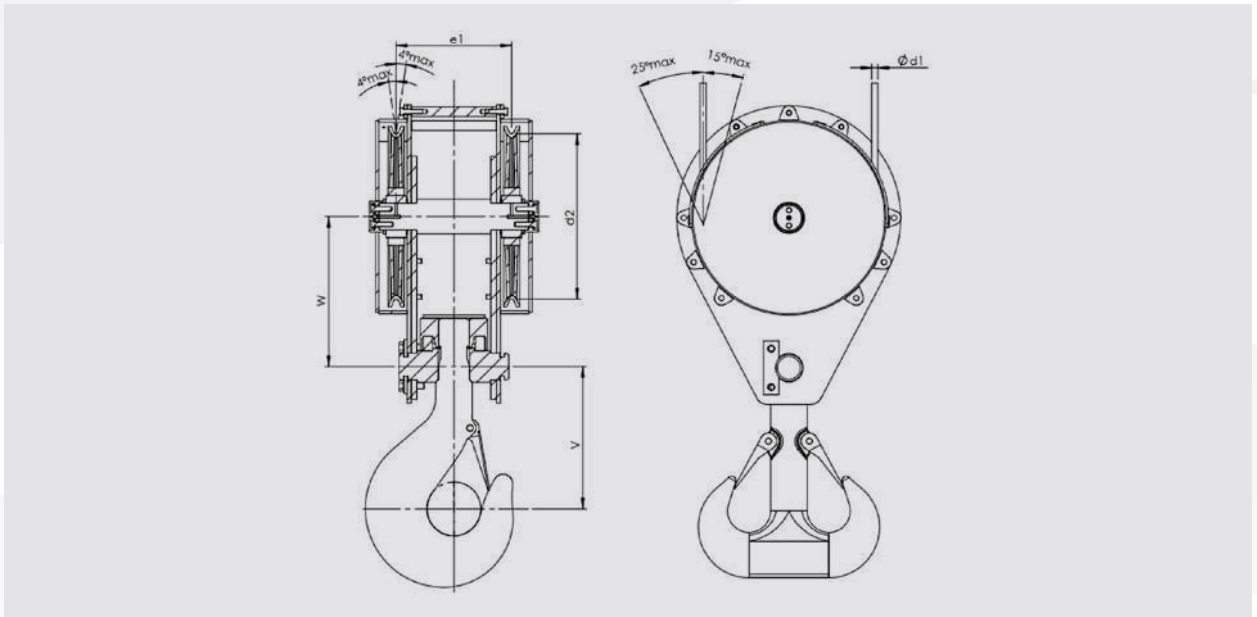

Modern Hook Block designs they need to respond to latest customer demands as:

- Easy to disassemble to exchange hook type and replace inner components and accessories as bearings and sheaves.
- Easy to grease it during maintenance, in order to keep all turning parts lubricated.


Proof Test Load (PTL) is being performed at IRIZAR benches in order to cover a full guarantee to the crane operator.

Complete Maintenance Manual is being delivered to the customer full of recommendations and good practices from the original manufacturer for a safe and long lifetime component.

Enjoy the Crane Block range in the following pages.

OVERHEAD/GANTRY CRANE BLOCKS

Light duty blocks One Sheave Block

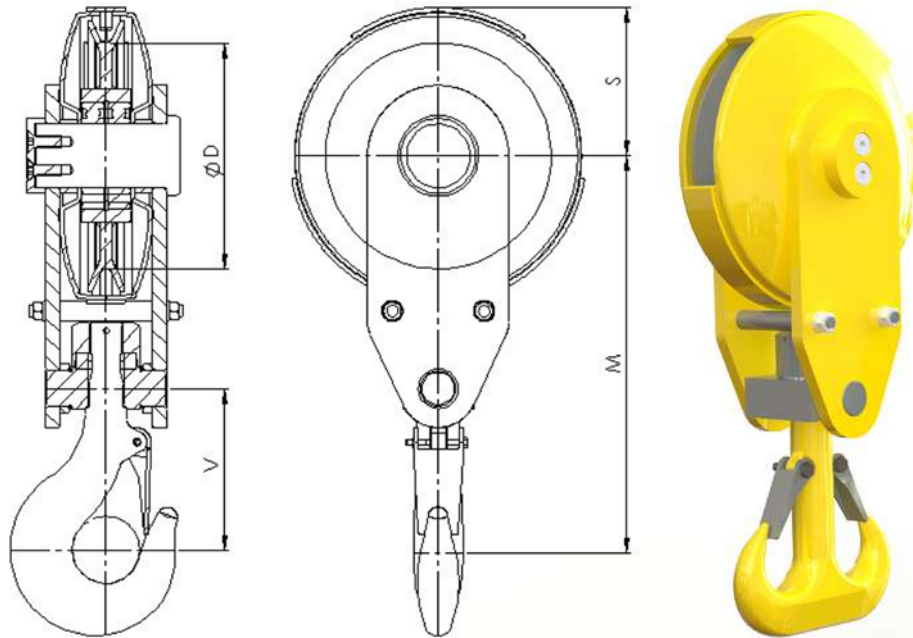


- WLL: from 2t to 32t.
- Hook: Single or Ramshorn. Forged and heat treated fully machined with nut & crosshead. Max size: 8 acc to DIN15400. Material grades: carbon (P) or alloy (V).
- Sheave: 1 (2 falls). Cold Laminated or Technical Plastic. Max size 17,7 inches (inner diameter).
- Bearing: axial for hook assembly + roller/ball for sheaves.
- Coating Protection: fully painted inside & outside.
- Certificate: EN10204-2.1. Load Test & FAT upon request.

LIGHT DUTY BLOCKS ONE SHEAVE BLOCK								
Overall dimensions (inch)						WLL (t) 1Bm/M3		Weight
Hook No	Ø Wire rope	ØD Sheave	V	M	S	P	T	lbs
0,8	$\frac{1}{4} - \frac{5}{16}$	$6 \frac{9}{32}$	$4 \frac{23}{32}$	$11 \frac{7}{32}$	$4 \frac{1}{8}$	2	-	26
1,6	$\frac{11}{32} - \frac{3}{8}$	$7 \frac{27}{32}$	$5 \frac{1}{2}$	$13 \frac{9}{16}$	$5 \frac{5}{32}$	4	6,3	44
2,5	$\frac{9}{16} - \frac{5}{8}$	11	$6 \frac{3}{32}$	$17 \frac{1}{8}$	$7 \frac{1}{16}$	6,3	10	79
4	$\frac{5}{8} - \frac{11}{16}$	$13 \frac{31}{32}$	$6 \frac{7}{8}$	$19 \frac{21}{32}$	$8 \frac{3}{4}$	10	16	161
5	$\frac{5}{8} - \frac{11}{16}$	$13 \frac{31}{32}$	$7 \frac{21}{32}$	$20 \frac{15}{32}$	$8 \frac{3}{4}$	12,5	20	174
6	$\frac{27}{32} - \frac{15}{16}$	$17 \frac{11}{16}$	$9 \frac{7}{16}$	$24 \frac{25}{32}$	$10 \frac{25}{32}$	16	25	278
8	$\frac{27}{32} - \frac{15}{16}$	$17 \frac{11}{16}$	$10 \frac{13}{32}$	$26 \frac{3}{8}$	$10 \frac{25}{32}$	20	32	302

OVERHEAD/GANTRY CRANE BLOCKS

Light duty blocks

Two Sheaves Block

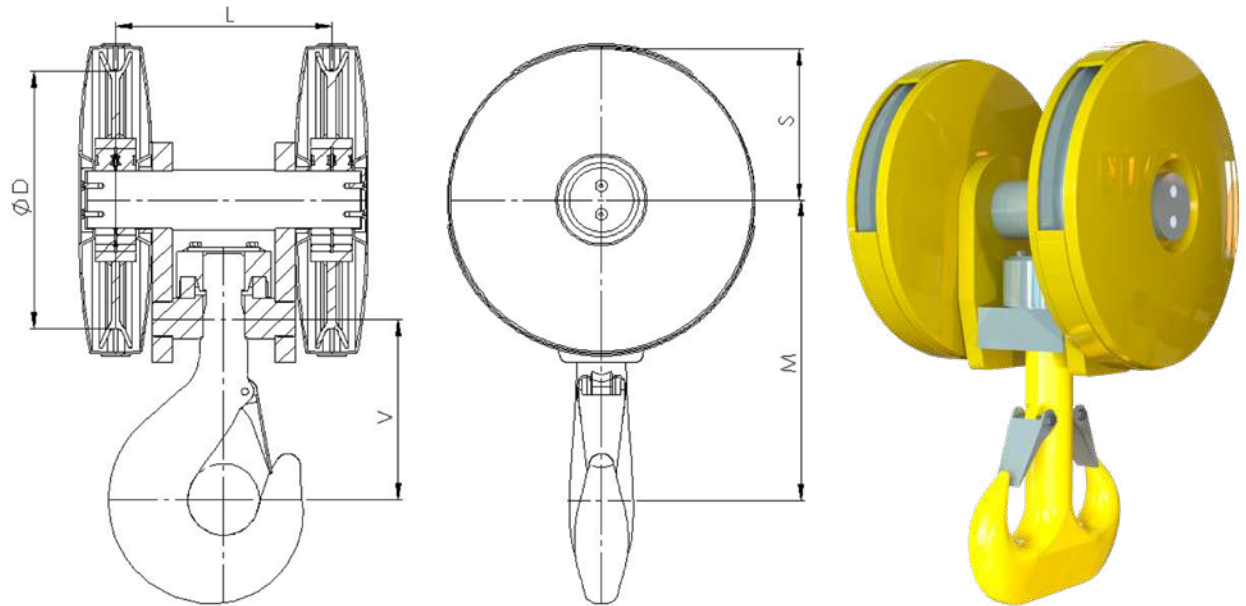


- WLL: from 4t to 64t.
- Hook: Single or Ramshorn. Forged and heat treated fully machined with nut & crosshead. Max size: 16 acc to DIN15400. Material grades: carbon (P) or alloy (V).
- Sheave: 2 (4 falls). Cold Laminated or Technical Plastic. Max size 17,7 inches (inner diameter).
- Bearing: axial for hook assembly + roller/ball for sheaves.
- Coating Protection: fully painted inside & outside.
- Certificate: EN10204-2.1. Load Test & FAT upon request.

LIGHT DUTY BLOCKS TWO SHEAVES BLOCK									
Overall dimensions (inch)							WLL (t) 1Bm/M3		Weight
Hook No	Ø Wire rope	ØD Sheave	L	V	M	S	P	T	lbs
1,6	$\frac{3}{16}$	$6 \frac{9}{32}$	$6 \frac{3}{8}$	$5 \frac{1}{2}$	$9 \frac{7}{16}$	$4 \frac{1}{8}$	4	6,3	40
2,5	$\frac{9}{32}$	$7 \frac{21}{32}$	$7 \frac{5}{8}$	$6 \frac{3}{32}$	$10 \frac{13}{32}$	$5 \frac{5}{32}$	6,3	10	66
4	$\frac{13}{32}$	11	$8 \frac{23}{32}$	$6 \frac{7}{8}$	$12 \frac{19}{32}$	$7 \frac{1}{16}$	10	16	132
5	$\frac{13}{32}$	11	$9 \frac{1}{2}$	$7 \frac{21}{32}$	$13 \frac{3}{16}$	$7 \frac{1}{16}$	12,5	20	146
6	$\frac{7}{16}$	$13 \frac{31}{32}$	$11 \frac{7}{8}$	$9 \frac{7}{16}$	$16 \frac{5}{16}$	$8 \frac{3}{4}$	16	25	289
8	$\frac{7}{16}$	$13 \frac{31}{32}$	$12 \frac{27}{32}$	$10 \frac{13}{32}$	$17 \frac{1}{8}$	$8 \frac{3}{4}$	20	32	313
10	$\frac{19}{32}$	$17 \frac{11}{16}$	$13 \frac{23}{32}$	11	$19 \frac{9}{32}$	$10 \frac{25}{32}$	25	40	498
12	$\frac{19}{32}$	$17 \frac{11}{16}$	$14 \frac{29}{32}$	$12 \frac{3}{8}$	$20 \frac{21}{32}$	$10 \frac{25}{32}$	32	50	567
16	$\frac{19}{34}$	$17 \frac{11}{16}$	$15 \frac{5}{16}$	$14 \frac{9}{16}$	$23 \frac{7}{32}$	$10 \frac{25}{32}$	40	63	631

OVERHEAD/GANTRY CRANE BLOCKS

Light duty blocks Three Sheaves Block

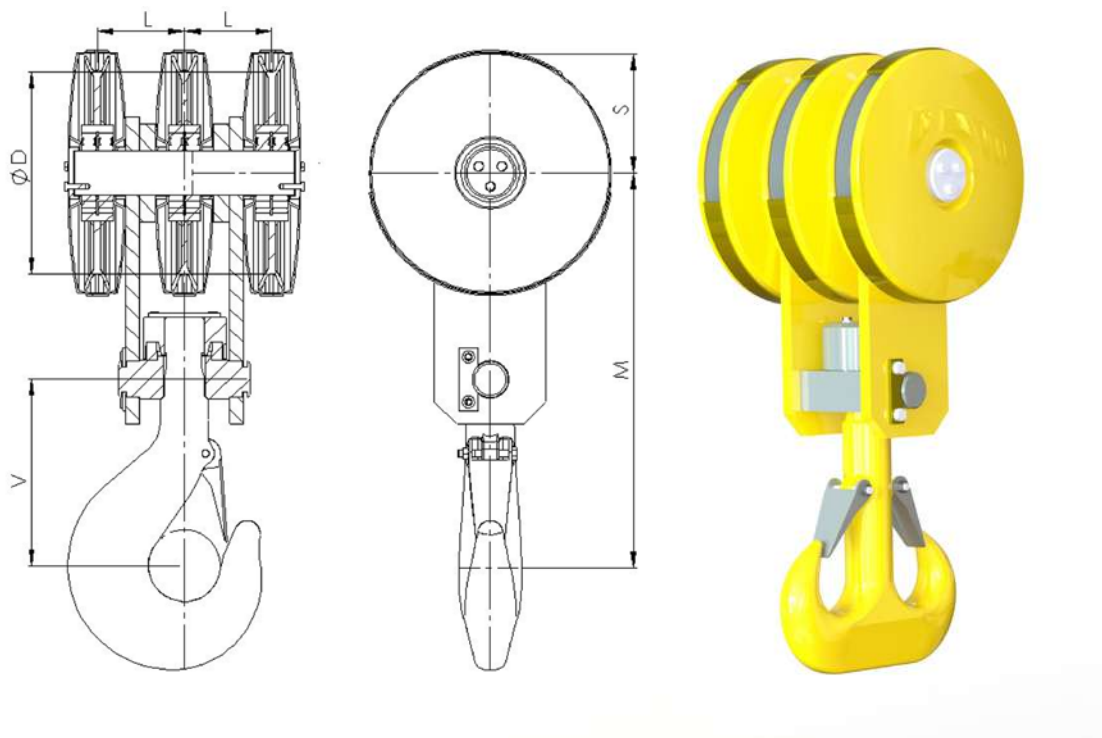


- WLL: from 20t to 80t.
- Hook: Single or Ramshorn. Forged and heat treated fully machined with nut & crosshead. Max size: 20 acc to DIN15400. Material grades: carbon (P) or alloy (V).
- Sheave: 3 (6 falls). Cold Laminated or Technical Plastic. Max size 17,7 inches (inner diameter).
- Bearing: axial for hook assembly + roller/ball for sheaves.
- Coating Protection: fully painted inside & outside.
- Certificate: EN10204-2.1. Load Test & FAT upon request.

LIGHT DUTY BLOCKS THREE SHEAVES BLOCK									
Overall dimensions (inch)							WLL (t) 1Bm/M3		Weight
Hook No	Ø Wire rope	ØD Sheave	L	V	M	S	P	T	lbs
8	$\frac{5}{8}$	$13 \frac{31}{32}$	$6 \frac{1}{4}$	$10 \frac{13}{32}$	$25 \frac{9}{16}$	$8 \frac{3}{4}$	20	32	375
20	$\frac{27}{32}$	$17 \frac{11}{16}$	$7 \frac{21}{32}$	$16 \frac{5}{16}$	$34 \frac{7}{16}$	$10 \frac{25}{32}$	50	80	961

OVERHEAD/GANTRY CRANE BLOCKS

Light duty blocks

Four Sheaves Block

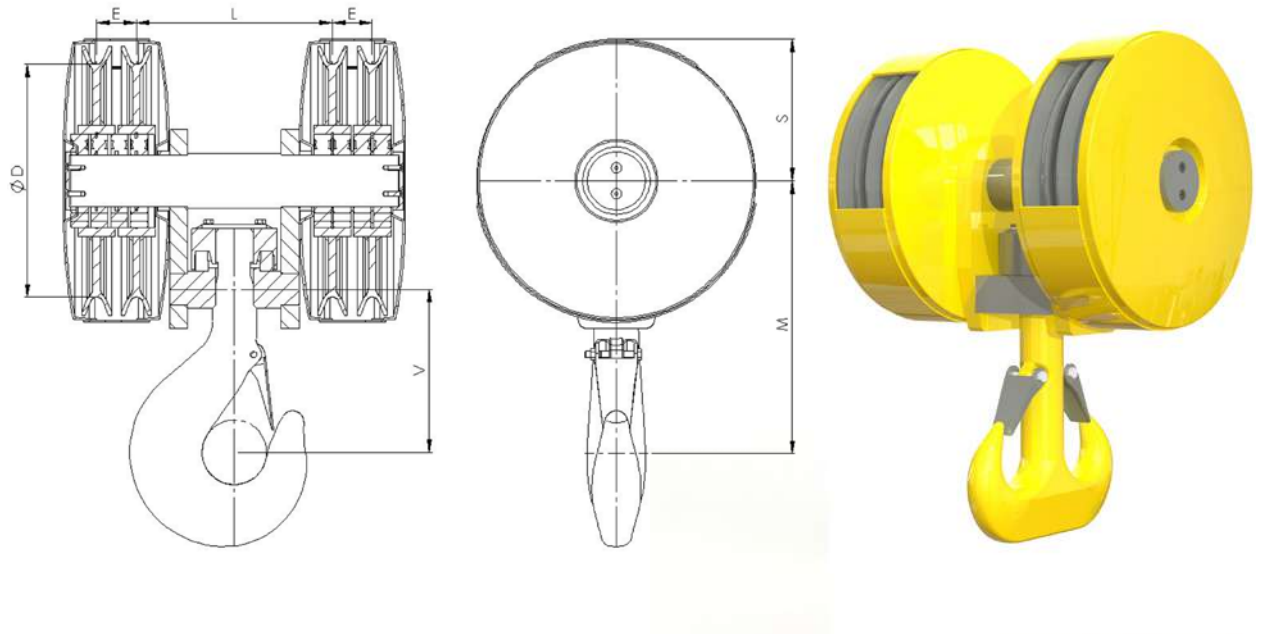


- WLL: from 6t to 100t.
- Hook: Single or Ramshorn. Forged and heat treated fully machined with nut & crosshead. Max size: 25 acc to DIN15400. Material grades: carbon (P) or alloy (V).
- Sheave: 4 (8 falls). Cold Laminated or Technical Plastic. Max size 17,7 inches (inner diameter).
- Bearing: axial for hook assembly + roller/ball for sheaves.
- Coating Protection: fully painted inside & outside.
- Certificate: EN10204-2.1. Load Test & FAT upon request.

LIGHT DUTY BLOCKS FOUR SHEAVES BLOCK										
Overall dimensions (inch)								WLL (t) 1Bm/M3		Weight
Hook No	Ø Wire rope	ØD Sheave	L	V	M	S	E	P	T	lbs
2,5	$\frac{3}{8}$	$7 \frac{27}{32}$	$7 \frac{5}{8}$	$6 \frac{3}{32}$	$10 \frac{13}{32}$	$5 \frac{5}{32}$	$1 \frac{3}{4}$	6,3	10	99
5	$\frac{9}{16}$	11	$9 \frac{1}{2}$	$7 \frac{21}{32}$	$13 \frac{3}{16}$	$7 \frac{1}{16}$	$1 \frac{15}{16}$	12,5	20	209
8	$\frac{5}{8}$	$13 \frac{31}{32}$	$12 \frac{27}{32}$	$10 \frac{13}{32}$	$17 \frac{1}{8}$	$8 \frac{3}{4}$	$2 \frac{17}{32}$	20	32	434
12	$\frac{27}{32}$	$17 \frac{11}{16}$	$14 \frac{29}{32}$	$12 \frac{3}{8}$	$20 \frac{21}{32}$	$10 \frac{25}{32}$	$2 \frac{15}{16}$	32	50	741
25	$\frac{27}{32}$	$17 \frac{11}{16}$	$16 \frac{1}{8}$	$18 \frac{3}{32}$	$30 \frac{5}{16}$	$10 \frac{25}{32}$	$2 \frac{15}{16}$	63	100	904

OVERHEAD/GANTRY CRANE BLOCKS

Medium duty blocks Four Sheaves Block

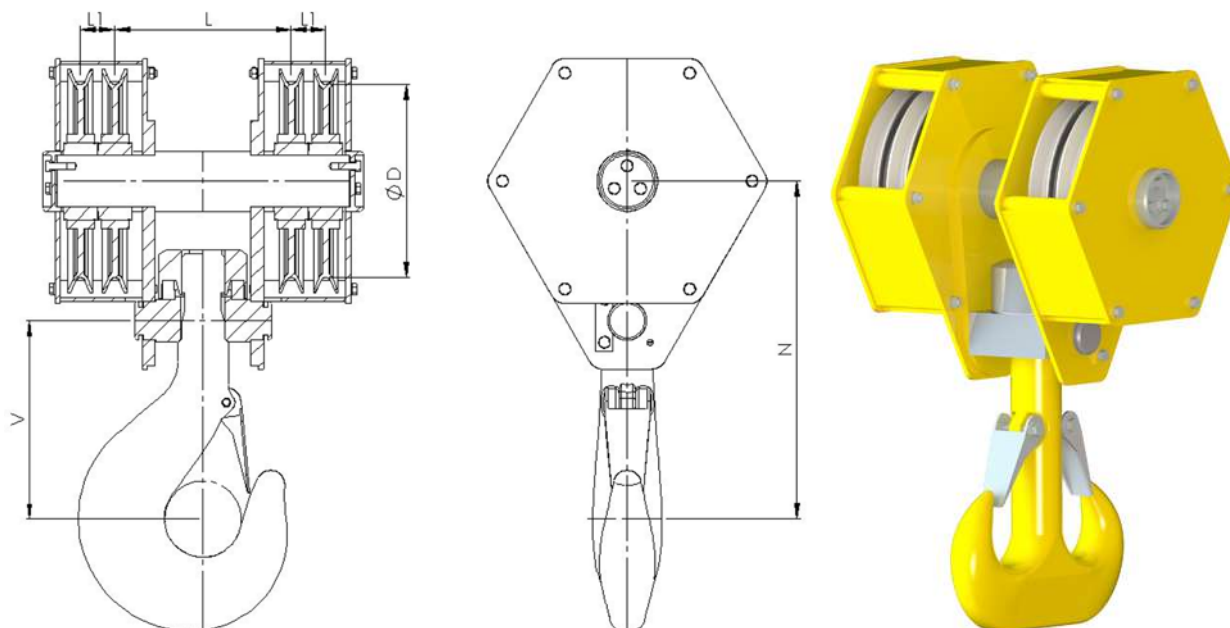


- WLL: from 12t to 200t. Further sizes upon request.
- Hook: Single or Ramshorn. Forged and heat treated fully machined with nut & crosshead. Max size: 63 acc to DIN15400. Material grades: carbon (P) or alloy (T/V). Further hook sizes and higher alloys upon request.
- Sheave: 4 (8 falls). Cold Laminated, Welded or Solid. Further sheaves upon request.
- Bearing: axial for hook assembly + roller/ball for sheaves.
- Coating Protection: fully painted inside & outside.
- Certificate: EN10204-2.1. Load Test & FAT upon request.

MEDIUM DUTY BLOCKS | FOUR SHEAVES BLOCK

Overall dimensions (inch)							WLL (t) 1Bm/M3	Weight
Hook No	Ø Wire rope	D	L	L1	V	N	P	lbs
5	$1^{5/32}$	$11^{13/32}$	$7^{27/32}$	$2^{1/16}$	$7^{21/32}$	$15^{17/32}$	12,5	397
6	$1^{5/32}$	$11^{13/32}$	$8^{21/32}$	$2^{1/16}$	$9^{7/16}$	$18^{3/32}$	16	441
8	$5/8$	$15^{23/32}$	$9^{7/16}$	$2^{1/16}$	$10^{13/32}$	$22^{7/32}$	20	529
10	$25/32$	$15^{23/32}$	$10^{5/8}$	$2^{11/32}$	$11^{1/32}$	$22^{13/16}$	25	595
16	$25/32$	$15^{23/32}$	$12^{19/32}$	$2^{17/32}$	$14^{9/16}$	$26^{3/4}$	40	926
20	$25/32$	$17^{5/16}$	$13^{3/4}$	$3^{1/8}$	$16^{5/16}$	$29^{1/8}$	50	1241
25	$2^{1/32}$	$17^{11/16}$	$16^{1/8}$	$3^{1/8}$	$18^{3/32}$	$30^{7/8}$	63	1257
32	$1^{5/16}$	$25^{3/16}$	$17^{11/16}$	$3^{17/32}$	$19^{21/32}$	$39^{9/16}$	80	1918
40	$1^{3/32}$	$27^{15/16}$	$19^{9/32}$	$3^{29/32}$	$22^{7/32}$	$44^{15/32}$	100	2535
50	$1^{5/32}$	$31^{7/8}$	$22^{1/32}$	$4^{1/8}$	$24^{13/32}$	$48^{13/16}$	125	3395
63	$1^{5/16}$	$35^{13/16}$	$24^{13/32}$	$4^{1/2}$	$27^{17/32}$	$54^{5/16}$	160	5732

OVERHEAD/GANTRY CRANE BLOCKS

Medium duty blocks Six Sheaves Block

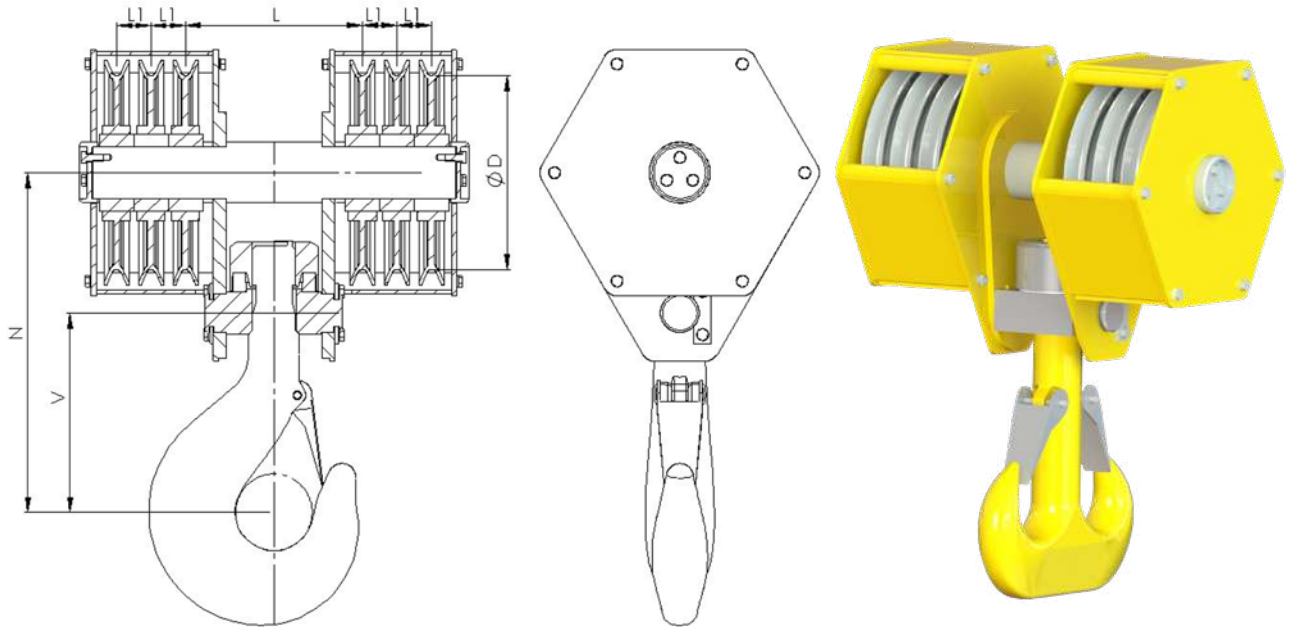


- WLL: from 50t to 300t. Further sizes upon request.
- Hook: Single or Ramshorn. Forged and heat treated fully machined with nut & crosshead. Max size: 63 acc to DIN15400. Material grades: carbon (P) or alloy (T/V). Further hook sizes and higher alloy steels upon request.
- Sheave: 6 (12 falls). Cold Laminated, Welded or Solid. Further sheaves upon request.
- Bearing: axial for hook assembly + roller/ball for sheaves.
- Coating Protection: fully painted inside & outside.
- Certificate: EN10204-2.1. Load Test & FAT upon request.

MEDIUM DUTY BLOCKS SIX SHEAVES BLOCK								
Overall dimensions (inch)							WLL (t) 1Bm/M3	Weight
Hook No	Ø Wire rope	D	L	L1	V	N	P	Ibs
20	$\frac{25}{32}$	$15 \frac{11}{32}$	$14 \frac{5}{32}$	$2 \frac{31}{32}$	$16 \frac{5}{16}$	$28 \frac{17}{32}$	50	1764
25	$\frac{27}{32}$	$17 \frac{11}{16}$	$16 \frac{1}{8}$	$3 \frac{1}{8}$	$18 \frac{3}{32}$	$30 \frac{7}{8}$	63	1905
32	$\frac{27}{32}$	$22 \frac{7}{16}$	$18 \frac{3}{32}$	$3 \frac{29}{32}$	$19 \frac{21}{32}$	$38 \frac{3}{8}$	80	2205
40	$\frac{15}{16}$	$25 \frac{9}{16}$	$19 \frac{21}{32}$	$4 \frac{1}{8}$	$22 \frac{7}{32}$	$42 \frac{29}{32}$	100	2910
50	1	$28 \frac{11}{32}$	$22 \frac{7}{16}$	$4 \frac{1}{2}$	$24 \frac{13}{32}$	$46 \frac{27}{32}$	125	3704
63	$1 \frac{3}{32}$	$32 \frac{9}{32}$	$25 \frac{3}{16}$	$5 \frac{11}{16}$	$27 \frac{17}{32}$	$52 \frac{11}{32}$	160	6482

OVERHEAD/GANTRY CRANE BLOCKS

Heavy duty blocks Two Sheaves Block

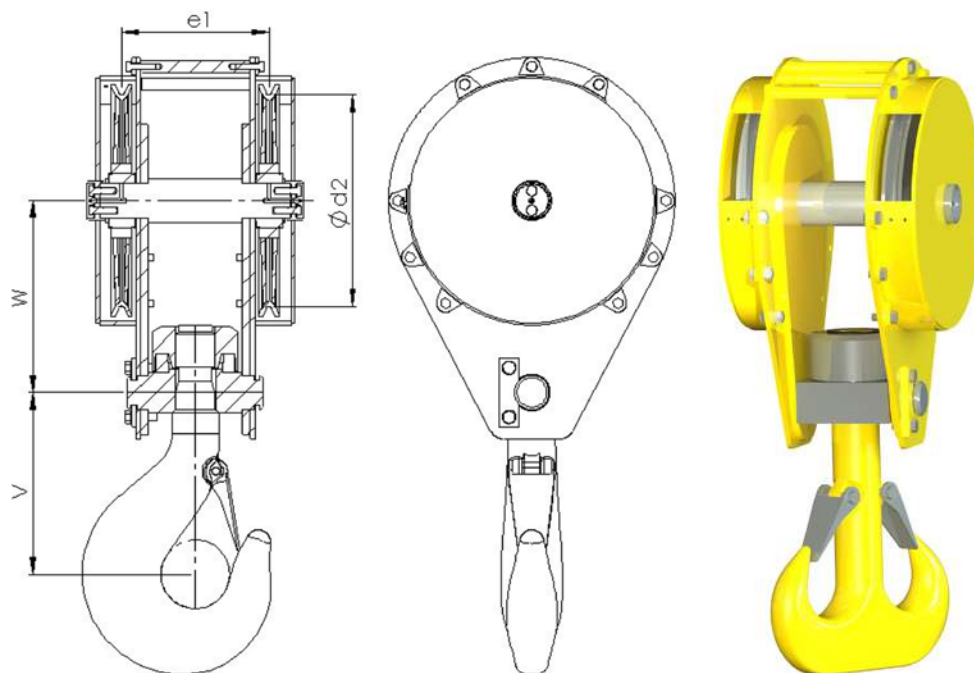


- WLL: from 16t to 100t. Further sizes upon request.
- Hook: Single or Ramshorn. Forged and heat treated fully machined with nut & crosshead. Max size: 40 acc to DIN15400. Material grades: carbon (P) or alloy (T/V). Further hook sizes and higher alloy steels upon request.
- Sheave: 2 (4 falls). Cold Laminated, Welded or Solid. Further sheaves upon request.
- Bearing: axial for hook assembly + roller/ball for sheaves.
- Coating Protection: fully painted inside & outside.
- Certificate: EN10204-2.1. Load Test & FAT upon request.

HEAVY DUTY BLOCKS TWO SHEAVES BLOCK							
Overall dimensions (inch)						WLL (t) 1Bm/M3	Weight
Hook No	Ø Wire rope	d2	e1	V	W	P	lbs
6	17/32	13 31/32	9 1/32	9 7/16	10 5/8	16	320
8	5/8	15 23/32	10 1/32	10 13/32	12 3/16	20	419
10	11/16	17 11/16	11	11	13 3/8	25	518
12	25/32	19 21/32	12 19/32	12 3/8	14 9/16	32	816
16	27/32	22 1/32	12 31/32	14 9/16	16 17/32	40	882
20	1	24 25/32	14 11/32	16 5/16	18 3/32	50	1235
25	1 3/32	27 15/16	15 5/32	18 3/32	20 1/16	63	1521
32	1 1/4	31 15/32	18 3/32	19 21/32	22 1/32	80	2205
40	1 13/32	35 13/32	19 15/32	22 7/32	25 3/16	100	2987

OVERHEAD/GANTRY CRANE BLOCKS

Heavy duty blocks Four Sheaves Block

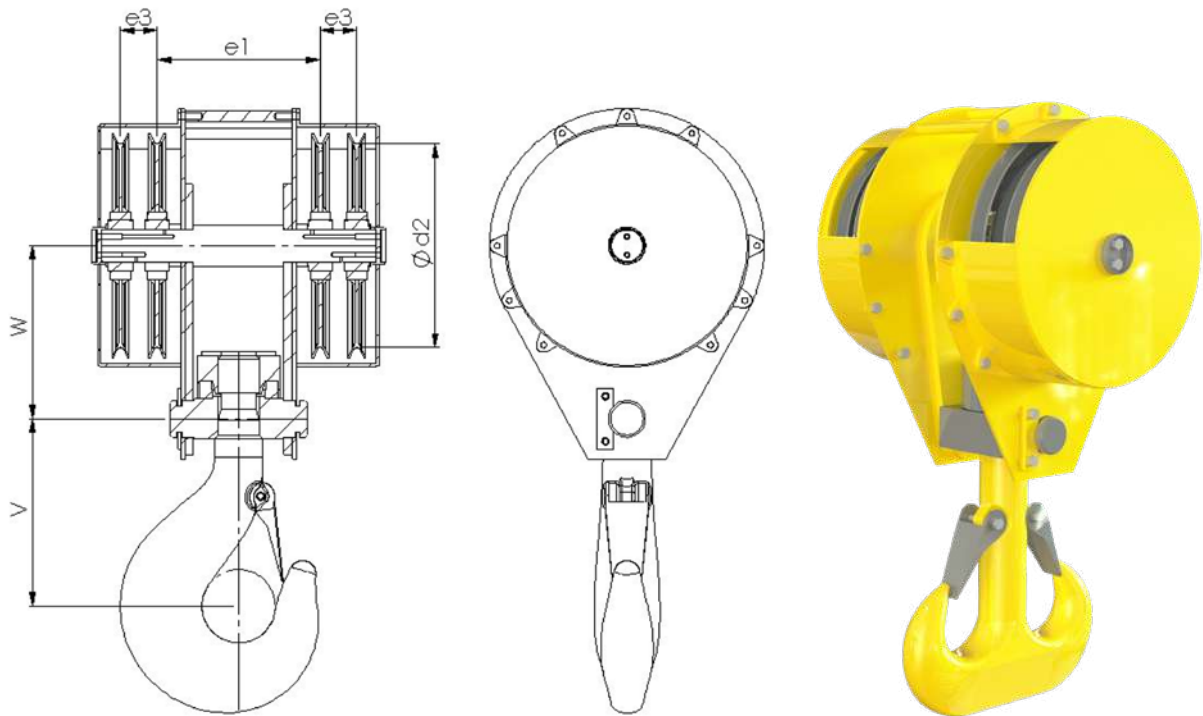


- WLL: from 60t to 500t. Further sizes upon request.
- Hook: Single or Ramshorn. Forged and heat treated fully machined with nut & crosshead. Max size: 125 acc to DIN15400. Material grades: carbon (P) or alloy (T/V). Further hook sizes and higher alloy steels upon request.
- Sheave: 4 (8 falls). Cold Laminated, Welded or Solid. Further sheaves upon request.
- Bearing: axial for hook assembly + roller/ball for sheaves.
- Coating Protection: fully painted inside & outside.
- Certificate: EN10204-2.1. Load Test & FAT upon request.

HEAVY DUTY BLOCKS FOUR SHEAVES BLOCK								
Overall dimensions (inch)							WLL (t) 1Bm/M3	Weight
Hook No	Ø Wire rope	d2	e1	e3	V	W	P	lbs
25	$25/16$	$22 \frac{1}{32}$	$15 \frac{23}{32}$	$3 \frac{29}{32}$	$18 \frac{3}{32}$	$16 \frac{17}{32}$	63	1510
32	$27/16$	$24 \frac{25}{32}$	$18 \frac{9}{32}$	$4 \frac{1}{8}$	$19 \frac{21}{32}$	$18 \frac{1}{2}$	80	2105
40	1	$27 \frac{15}{16}$	$20 \frac{15}{32}$	$5 \frac{3}{32}$	$22 \frac{7}{32}$	$20 \frac{15}{32}$	100	2943
50	$1 \frac{3}{32}$	$31 \frac{15}{32}$	$23 \frac{1}{32}$	$5 \frac{11}{16}$	$24 \frac{13}{32}$	$23 \frac{1}{32}$	125	3902
63	$1 \frac{1}{4}$	$35 \frac{13}{32}$	$25 \frac{25}{32}$	$6 \frac{3}{32}$	$27 \frac{17}{32}$	$25 \frac{3}{8}$	160	6460
80	$1 \frac{13}{32}$	$39 \frac{11}{32}$	$27 \frac{3}{4}$	$6 \frac{15}{32}$	$31 \frac{15}{32}$	$27 \frac{15}{16}$	200	6768
100	$1 \frac{9}{16}$	$44 \frac{3}{32}$	$30 \frac{1}{2}$	$6 \frac{11}{16}$	$34 \frac{13}{16}$	$31 \frac{3}{32}$	250	8973
125	$1 \frac{23}{32}$	$49 \frac{3}{16}$	$33 \frac{1}{4}$	$7 \frac{21}{32}$	$39 \frac{11}{32}$	$33 \frac{27}{32}$	320	11464

OFFSHORE CRANE BLOCKS

Single sheave offshore block

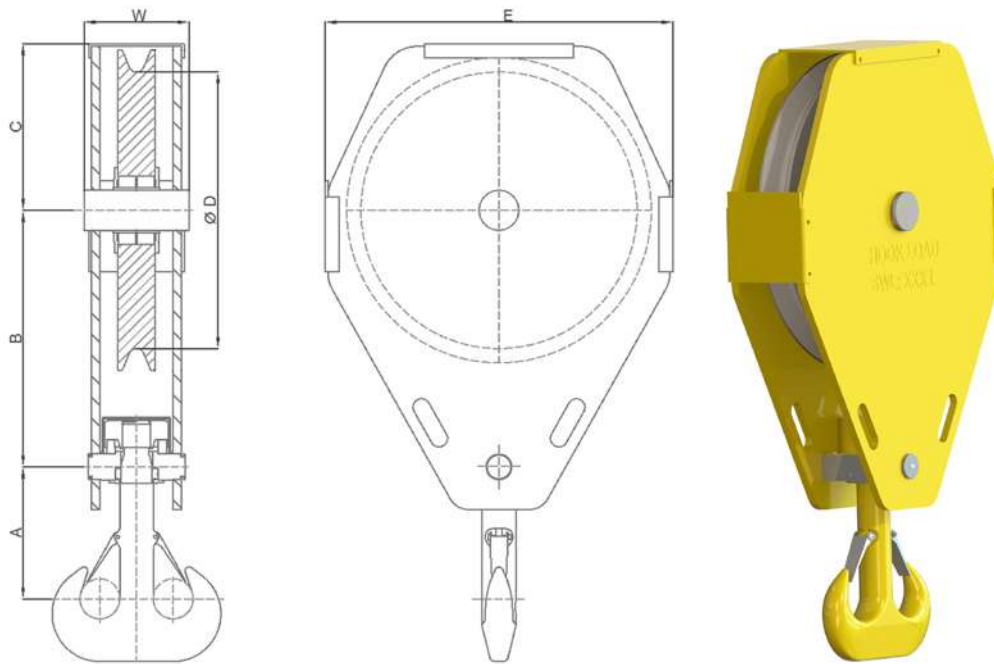

- WLL: from 80t to 500t.
- Hook: Single or Ramshorn. Forged and heat treated fully machined with nut & crosshead. Max size: 125 acc to DIN15400. Material grades: alloy (T/V). Further hook sizes upon request.
- Sheave: 1 (2 falls). Solid sheave.
- Bearing: axial for hook assembly + roller/spherical-roller for sheaves. Bronze bushing fully recommended.
- Coating Protection: fully painted inside & outside for offshore environment.
- Sealings: for offshore topsite and subsea lifting.
- Certificate: EN10204-2.1. Load Test & FAT upon request.

OFFSHORE CRANE BLOCKS | SINGLE SHEAVE BLOCK

Overall dimensions (inch)								WLL (t)	Weight
Hook No	Ø Wire rope	ØD	W	A	B	C	E	1Bm/M3	lbs
20	1 5/8	31 15/32	15 1/32	17 17/32	35 13/32	20 15/32	42 29/32	80	3307
32	2 3/16	42 1/2	19 3/32	20 15/16	45 1/4	26 3/8	55 1/2	125	7377
50	2 3/4	53 1/8	22 5/8	25 3/4	53 1/8	32 21/32	67 11/16	200	12582
80	2 29/32	55 1/2	26 5/32	32 31/32	59 1/32	34 1/4	72 1/32	320	17619
100	2 31/32	57 1/16	29 1/32	36 7/16	59 1/32	35 1/32	72 7/16	400	20518
125	3 3/8	64 15/16	30 13/16	40 25/32	64 15/16	40 5/32	83 1/16	500	27683

OFFSHORE CRANE BLOCKS

Multiple sheaves offshore block



- WLL: from 80t to 2.000t.
- Hook: Ramshorn or Quad based on DIN15400 or others. Forged and heat treated fully machined with nut & crosshead. Material grades: alloy (T/V). See chapter 1 (Crane Hooks).
- Sheave: Multiple sheaves. Solid sheaves.
- Bearing: axial for hook assembly + roller/ spherical-roller for sheaves. Bronze bushing fully recommended.
- Coating Protection: fully painted inside & outside for offshore environment.
- Sealings: for offshore topsite and subsea lifting.
- Certificate: EN10204-3.1. For 3.2 cert with Worldwide classification societies upon request.

OTHER TYPE OF CRANE BLOCKS

Tower crane block

- Hook: Single or Ramshorn based on DIN15400 or others. Forged and heat treated fully machined with nut & crosshead. Material grades: carbon (P) or alloy (T/V). See chapter 1 (Crane Hooks).
- Sheave: 1 or 2 sheaves (2 or 4 falls). Cold Laminated or Technical Plastic.
- Bearing: axial for hook assembly + roller/ball for sheaves.
- Coating Protection: fully painted inside & outside.
- Certificate: EN10204-3.1. For 3.2 cert with Worldwide classification societies upon request.



Mobile crane blocks

- WLL: from 8t to 100t. Further sizes upon request.
- Hook: Single or Ramshorn based on DIN15400 or others. forged and heat treated fully machined with nut & crosshead. Material grades: carbon (P) or alloy (T/V). See chapter 1 (Crane Hooks).
- Sheave: 1 or multiple sheaves. Cold Laminated, Welded, Solid or technical plastic.
- Bearing: axial for hook assembly + roller/ball for sheaves.
- Coating Protection: fully painted inside & outside.
- Certificate: EN10204-3.1. For 3.2 cert with Worldwide classification societies upon request.



3. SUBSEA HOOKS

Intro

Subsea is considered Offshore environment and it's divided into shallow water and deep water (Presalt, Salt and Postsalt for latins).

Subsea Deep Water application is considered one of the most critical Offshore application because of the poor accessibility of the products, harsh environment and high costs to get the products back to top site. Consequently maintenance jobs are difficult to manage and long life times are required.

Under these conditions, forged material is the preferred & valued technology to guarantee long life times with low maintenance costs. For high safety factor during long life time, super alloy steels are the preferred steel grades to guarantee a safe functional long life products. Surface protection & coatings have also a key role to keep designed life times.

Besides forging material Irizar subsea hooks are fully bended with 100% grain orientation, following the good practices of international crane hook rules and standards. Related to hooks, because its geometry, can comply with different purposes, being the main ones:

Related to **Subsea Lifting**, the crane is regularly located top site, even if recently semi-submergible and submergible cranes are being designed and installed. This kind of Offshore cranes regularly do subsea operations: most of them they do in shallow water, but others do deep water for e.g manifolds recovery, seabed pipeline maintenance or repair is being possible to do operations up to 13.500 feet subsea.

Related to **long term Mooring Line**, main technology to fix floating structures into the seabed, forged hook is a great product to link two chains, chain with rope, rope with sling or any technology used for floating structures mooring lines. Recently other technologies beside steel chain are being used and recommended by

installation companies based on two criterias:

- Weight of mooring line in deep water.
- Cost of commissioning & installation.

Irizar Forge is approved by DNV & ABS to produce, test & certify Offshore Mooring Accessories in material R4 according to "DNV-OS-E302 Offshore Mooring Chain" and "ABS Guide for Offshore Mooring Chain".



Mooring Line is being a combination technology in recent projects, combining steel with fiber products: steel chain, steel wire ropes, synthetic ropes and textile slings. Combination of all 4 technologies is reducing commissioning costs and reducing weight. Hooks and other links are in between different technologies to ensure a permanent steel-fiber, steel-steel or fiber-fiber join or linkage.


Seabed is full of **pipelines** and related equipment: pipelines are flexible to avoid crack when ocean currents effect hits against pipes and related equipment. PLET hook (pipe line end termination), is used to return the pipe to the original position and correct its position permanently.

Seabed is also full of rubbish as consequence of decades extraction activity: hooks together with ROV systems are used to **collect & recover** materials and clean seabed for environmental reasons.

Enjoy the Subsea Forged Hook range in the following pages.

FORGED ROV EYE HOOKS

Long shank ROV eye hook

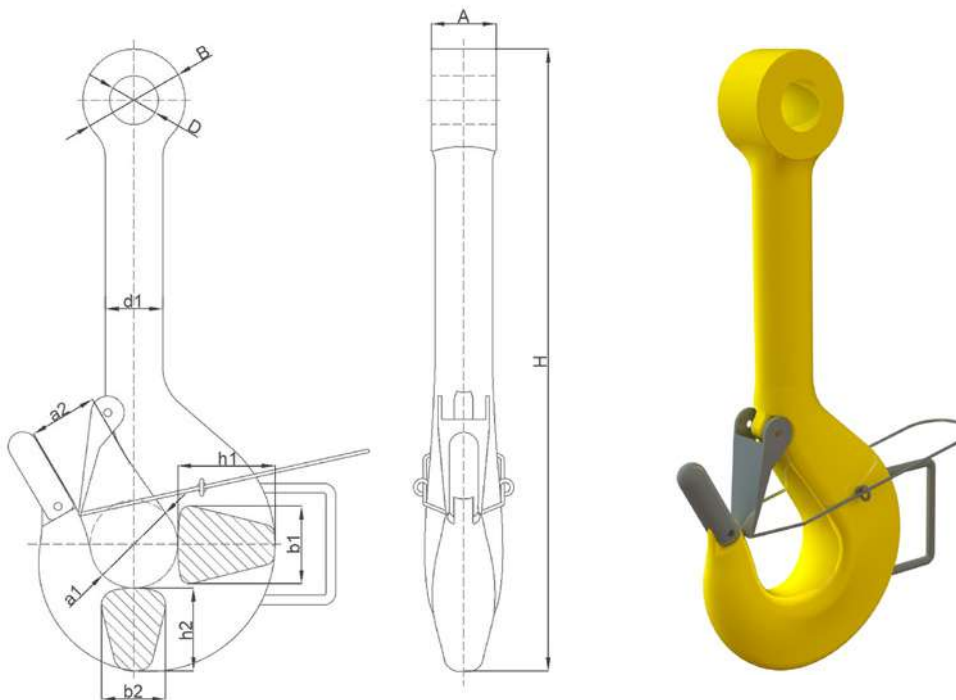


- WLL: from 10t to 600t.
- Hook forged and heat treated.
Fully bended with 100% grain orienting.
- Material: carbon, alloys and super alloys.
- Surface Protection & Coatings: upon request.
- Safety Factor: min. 4:1.
- Load Test: requested / recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

FORGED ROV EYE HOOKS LONG SHANK ROV EYE HOOK													Weight
Overall dimensions (inch)													
WLL (t)	MBL (t)	a1	a2	b1	b2	h1	h2	d1	A	D	B	H	lbs
100	400	6 5/16	4 29/32	5 1/2	4 21/32	7 3/32	5 29/32	4 6/32	4 21/32	3 15/16	8 9/32	43 25/32	346
120	480	7 3/32	5 1/2	6 5/16	5 6/32	7 7/8	6 11/16	4 21/32	5 9/32	3 15/16	8 9/32	50 9/32	485
150	600	7 7/8	6 5/16	7 3/32	5 29/32	8 13/16	7 15/32	5 6/32	5 1/2	4 1/2	9 7/16	55 6/32	683
200	800	8 13/16	7 3/32	7 7/8	6 11/16	9 27/32	8 11/32	5 29/32	5 29/32	5 13/32	11 13/32	61 2/32	992
250	1000	9 27/32	7 7/8	8 13/16	7 15/32	11 1/32	9 9/32	6 11/16	6 11/16	5 25/32	12 7/32	65 1/2	1389
300	1200	11 1/32	8 13/16	9 27/32	8 11/32	12 13/32	10 7/16	7 15/32	7 15/32	6 7/32	13	72 3/4	1852
400	1600	12 13/32	9 27/32	11 1/32	9 9/32	13 31/32	11 13/16	8 11/32	8 2/32	7 8/32	14 31/32	82 3/32	2635
500	2000	13 31/32	11 1/32	12 13/32	10 7/16	15 3/4	13 6/32	9 9/32	9 2/32	7 5/8	15 3/4	89 13/32	3605
600	2400	15 3/4	12 13/32	13 31/32	11 13/16	17 23/32	14 3/4	10 7/16	10 1/32	8 15/32	17 23/32	97 7/16	5027

Smaller sizes upon request.
WLL working load limit using R4 material.
Tolerances: -0/+7% forging tolerance.
Eye dimensions (A,B,D) and other dimensions can be modified.

FORGED ROV EYE HOOKS

Standard shank ROV eye hook

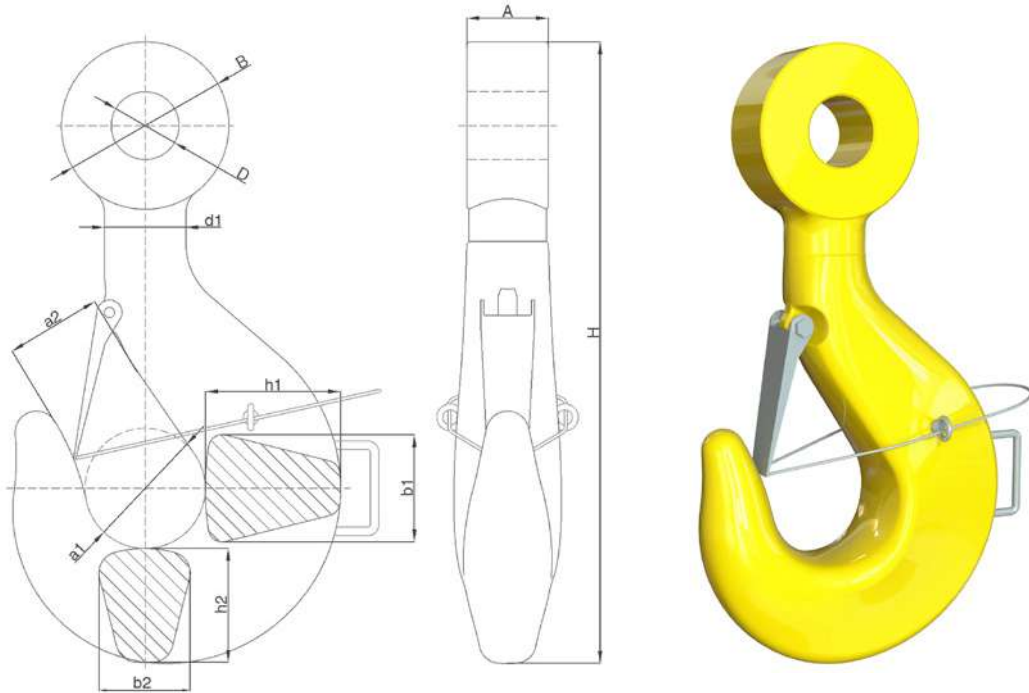

- WLL: from 80t to 1.000t.
- Hook forged and heat treated.
Fully bended with 100% grain orienting.
- Material: carbon, alloys and super alloys.
- Surface Protection & Coatings: upon request.
- Safety Factor: min. 4:1.
- Load Test: requested / recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

FORGED ROV EYE HOOKS STANDARD SHANK ROV EYE HOOK													Weight
Overall dimensions (inch)													
WLL (t)	MBL (t)	a1	a2	b1	b2	h1	h2	d1	A	D	B	H	lbs
100	400	6 5/16	4 29/32	5 1/2	4 21/32	7 3/32	5 29/32	4 6/32	4 21/32	3 15/16	8 9/32	31 31/32	302
120	480	7 3/32	5 1/2	6 5/16	5 6/32	7 7/8	6 11/16	4 21/32	5 9/32	3 15/16	8 9/32	36 1/2	419
150	600	7 7/8	6 5/16	7 3/32	5 29/32	8 13/16	7 15/32	5 6/32	5 1/2	4 1/2	9 7/16	41 13/32	600
200	800	8 13/16	7 3/32	7 7/8	6 11/16	9 27/32	8 11/32	5 29/32	5 29/32	5 13/32	11 13/32	47 9/32	875
250	1000	9 27/32	7 7/8	8 13/16	7 15/32	11 1/32	9 9/32	6 11/16	6 11/16	5 25/32	12 7/32	51 23/32	1171
300	1200	11 1/32	8 13/16	9 27/32	8 11/32	12 13/32	10 7/16	7 15/32	7 15/32	6 7/32	13	57	1609
400	1600	12 13/32	9 27/32	11 1/32	9 9/32	13 31/32	11 13/16	8 11/32	8 2/32	7 8/32	14 31/32	66 11/32	2277
500	2000	13 31/32	11 1/32	12 13/32	10 7/16	15 3/4	13 6/32	9 9/32	9 2/32	7 5/8	15 3/4	73 21/32	3153
600	2400	15 3/4	12 13/32	13 31/32	11 13/16	17 23/32	14 3/4	10 7/16	10 1/32	8 15/32	17 23/32	81 11/16	4405
800	3200	17 23/32	13 31/32	15 3/4	13 6/32	19 11/16	16 23/32	11 13/16	11 1/32	9 7/16	19 11/16	90 5/16	6142
1000	4000	19 11/16	15 3/4	17 23/32	14 3/4	22 27/32	18 11/16	13 6/32	12 19/32	11 1/32	22 27/32	96 15/32	8527
1250	5000	22 2/32	17 23/32	19 11/16	16 23/32	24 13/16	20 7/8	14 3/4	13 31/32	12 13/32	25 19/32	110 5/8	11998
1550	6200	24 13/16	19 11/16	22 2/32	18 11/16	27 15/16	22 27/32	16 23/32	13 31/32	13 6/32	26 25/32	120 15/32	15942
1800	7200	27 15/16	22 2/32	24 13/16	20 7/8	31 1/2	24 13/16	18 11/16	16 5/32	15 9/16	29 17/32	135 1/32	22035

Smaller sizes upon request.


WLL working load limit using R4 material.

Tolerances: -0/+7% forging tolerance.

Eye dimensions (A,B,D) and other dimensions can be modified.

FORGED ROV EYE HOOKS

ROV eye forged single chain hook based on DIN7540 design

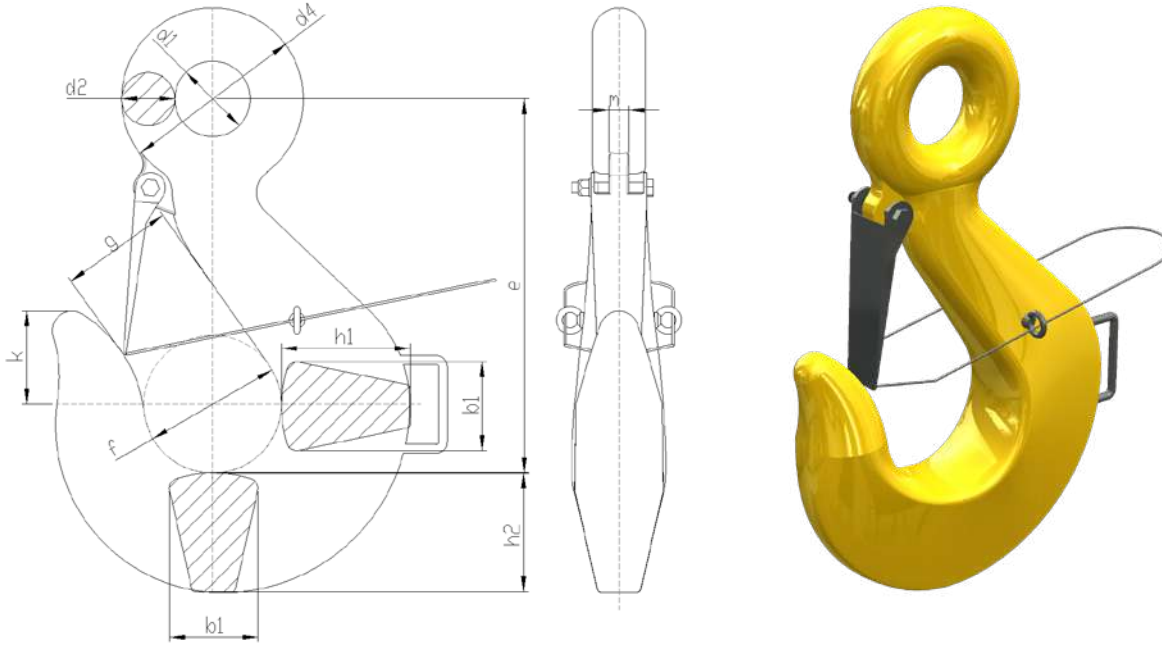

- WLL: from 5t to 400t.
- Hook forged and heat treated. Guaranteed grain orienting.
- Material: carbon, alloys and super alloys.
- Surface Protection & Coatings: upon request
- Safety Factor: min. 4:1 with the highest material grade.
- Load Test: requested / recommended. IL0-3, FAT or Breaking Test upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.


ROV EYE FORGED SINGLE CHAIN HOOK BASED ON DIN7540 DESIGN

No	WLL (t)	Overall dimensions (inch)											Weight
		b1	d1	d2	e	f	g	h1	h2	k	m	d4	lbs
34	40	3 2/32	4 1/2	2	18 4/32	5 1/2	4 9/32	4 21/32	4 2/32	3 5/32	25/32	8 1/2	77
35	50	3 1/2	5 4/32	2	20 15/32	6 7/32	4 7/8	5 5/16	4 9/16	3 17/32	29/32	9 3/32	112
36	63	3 29/32	5 21/32	2 17/32	21 9/16	6 15/16	5 7/16	5 15/16	5 4/32	3 31/32	31/32	10 23/32	150
37	80	4 11/32	4 1/32	2 15/32	24 1/32	7 25/32	6 3/32	6 5/8	5 23/32	4 7/16	1 6/32	8 31/32	176
38	100	4 29/32	4 9/16	2 29/32	25 19/32	8 27/32	6 7/8	7 11/16	6 25/32	5 9/32	1 1/2	10 13/32	276
39	150	6 5/16	5 4/32	3 3/8	30 4/32	9 27/32	7 7/8	8 27/32	7 27/32	6 5/16	1 1/2	11 7/8	551
40	200	7 3/32	5 29/32	4 1/32	33 15/32	10 13/16	8 27/32	10 8/32	9 11/32	7 11/16	1 25/32	13 15/16	805
41	250	7 7/8	6 11/16	4 23/32	36 17/32	12 7/32	10 1/32	11 13/32	10 19/32	8 9/32	1 25/32	16 5/32	1135
42	300	8 21/32	7 15/32	5 1/2	41 13/32	13 25/32	11 13/32	13	12 6/32	9 7/16	1 25/32	18 1/2	1609
43	400	9 7/16	8 9/32	6 11/16	47 2/32	15 3/4	12 19/32	14 31/32	13 19/32	10 5/8	1 25/32	21 21/32	2326

Smaller sizes upon request.
WLL working load limit using R4 material.
Forging tolerances +/-5%.

FORGED ROV HOOKS

KS ROV eye hook

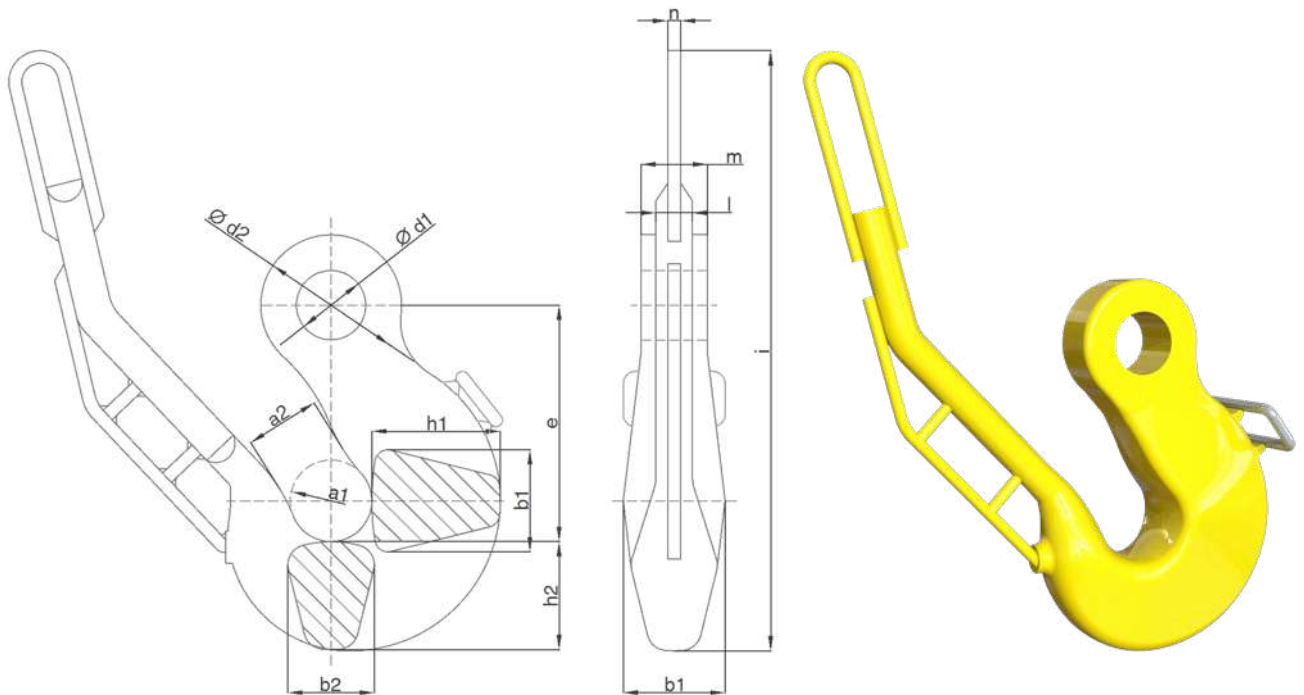

- WLL: from 200t to 345t.
- Hook forged and heat treated (nose welded). Body fully bended with 100% grain orienting.
- Material: carbon, alloys and super alloys.
- Surface Protection & Coatings: upon request.
- Safety Factor: min. 4:1.
- Load Test: requested / recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.


FORGED ROV HOOKS KS ROV EYE HOOK														
Overall dimensions (inch)														Weight
No	a1	a2	b1	b2	d1	d2	e	h1	h2	i	l	m	n	lbs
KS40	7 ²⁷ / ₃₂	6 ¹⁵ / ₃₂	7 ²⁷ / ₃₂	6 ¹¹ / ₁₆	5 ⁹ / ₃₂	13 ¹ / ₈	22 ³ / ₄	9 ¹³ / ₁₆	8 ²⁷ / ₃₂	56 ¹¹ / ₁₆	3 ¹⁷ / ₃₂	5 ³ / ₃₂	1 ¹ / ₄	871
KS50	7 ²⁷ / ₃₂	7 ¹ / ₁₆	9 ⁵ / ₈	7 ²⁷ / ₃₂	6 ¹¹ / ₁₆	13 ⁹ / ₁₆	22 ¹³ / ₁₆	12 ³ / ₈	10 ¹ / ₁₆	57 ²⁷ / ₃₂	3 ¹⁷ / ₃₂	6 ¹³ / ₃₂	1 ¹ / ₄	1345

WLL working load limit using R4 material.
 Tolerances: -0/+7% forging tolerance.
 Eye dimensions (d1,d2,m) can be modified.

FORGED ROV HOOKS

Sling defender ROV eye hook

**CUSTOMIZATION
UPON REQUEST**

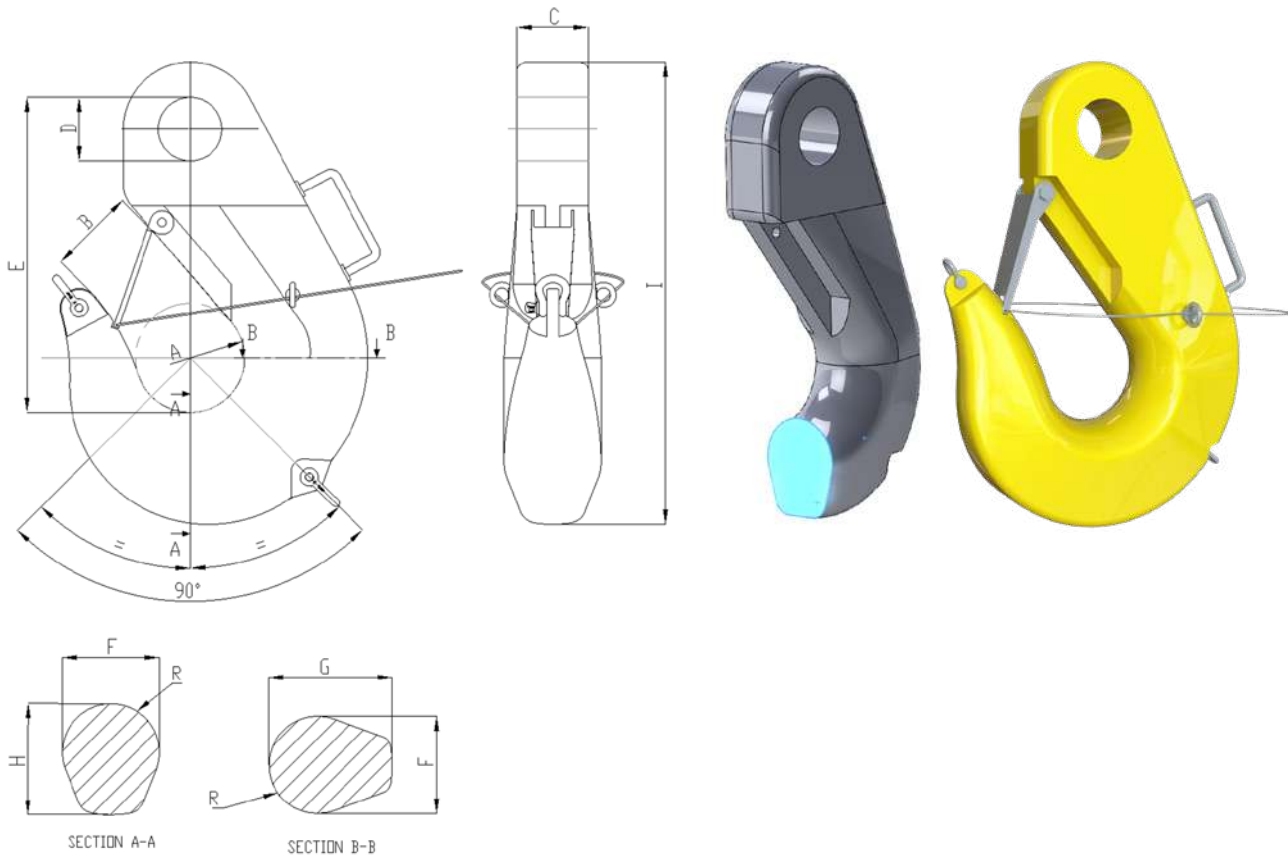

- WLL: from 50t to 1.000t.
- Hook forged and heat treated.
Fully bended with 100% grain orienting.
- Material: carbon, alloys and super alloys.
- Surface Protection & Coatings: upon request.
- Safety Factor: min. 4:1.
- Load Test: requested / recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

FORGED ROV HOOKS SLING DEFENDER ROV EYE HOOK												
Overall dimensions (inch)											Weight	
WLL (t)	MBL (t)	A	B	C	D	E	F	R	G	H	I	lbs
50	200	4 13/32	3 17/32	3 5/32	2 15/16	15 11/32	3 15/16	2 5/32	4 29/32	4 17/32	21 27/32	143
63	250	4 29/32	3 15/16	3 5/32	3 5/32	16 23/32	4 13/32	2 3/8	5 1/2	4 29/32	23 13/16	194
80	320	5 1/2	4 13/32	3 15/16	3 7/16	18 5/16	4 29/32	2 3/8	6 5/16	5 23/32	26 3/8	247
100	400	6 5/16	4 29/32	5 4/32	3 15/16	20 7/8	5 1/2	3 5/32	7 3/32	6 1/2	29 29/32	353
120	480	7 3/32	5 1/2	5 4/32	3 15/16	22 2/32	6 5/16	3 5/32	7 7/8	7 9/32	32 3/32	485
150	600	7 7/8	6 5/16	5 1/2	4 1/2	23 7/32	7 3/32	3 17/32	8 13/16	8 2/32	34 2/32	672
200	800	8 13/16	7 3/32	5 29/32	5 13/32	26 25/32	7 7/8	4 11/32	9 27/32	8 27/32	38 25/32	1003
250	1000	9 27/32	7 7/8	6 11/16	5 25/32	29 17/32	8 13/16	4 29/32	11 1/32	9 27/32	42 29/32	1334
300	1200	11 1/32	8 13/16	7 15/32	6 7/32	34 2/32	9 27/32	5 1/2	12 13/32	11 7/32	49 7/32	1863
400	1600	12 13/32	9 27/32	8 2/32	7 8/32	35 13/16	11 1/32	6 11/16	13 31/32	12 19/32	52 9/16	2601
500	2000	13 31/32	11 1/32	9 2/32	7 5/8	38 25/32	12 13/32	7 3/32	15 3/4	14 6/32	57 9/32	3329
600	2400	15 3/4	12 13/32	10 1/32	8 15/32	40 3/4	13 31/32	7 15/32	17 23/32	15 3/4	61 7/32	4519
800	3200	17 23/32	13 31/32	11 1/32	9 7/16	46 15/32	15 3/4	8 21/32	19 11/16	17 29/32	69 7/8	6812
1000	4000	19 11/16	15 3/4	12 19/32	11 1/32	52 3/4	17 23/32	9 7/16	22 2/32	20 3/32	79 4/32	9656


WLL working load limit using R4 material.
Forging tolerances +/-5%.
Eye dimensions (C,D) can be modified.



FORGED ROV HOOKS

Load Transfer ROV eye hook

**CUSTOMIZATION
UPON REQUEST**

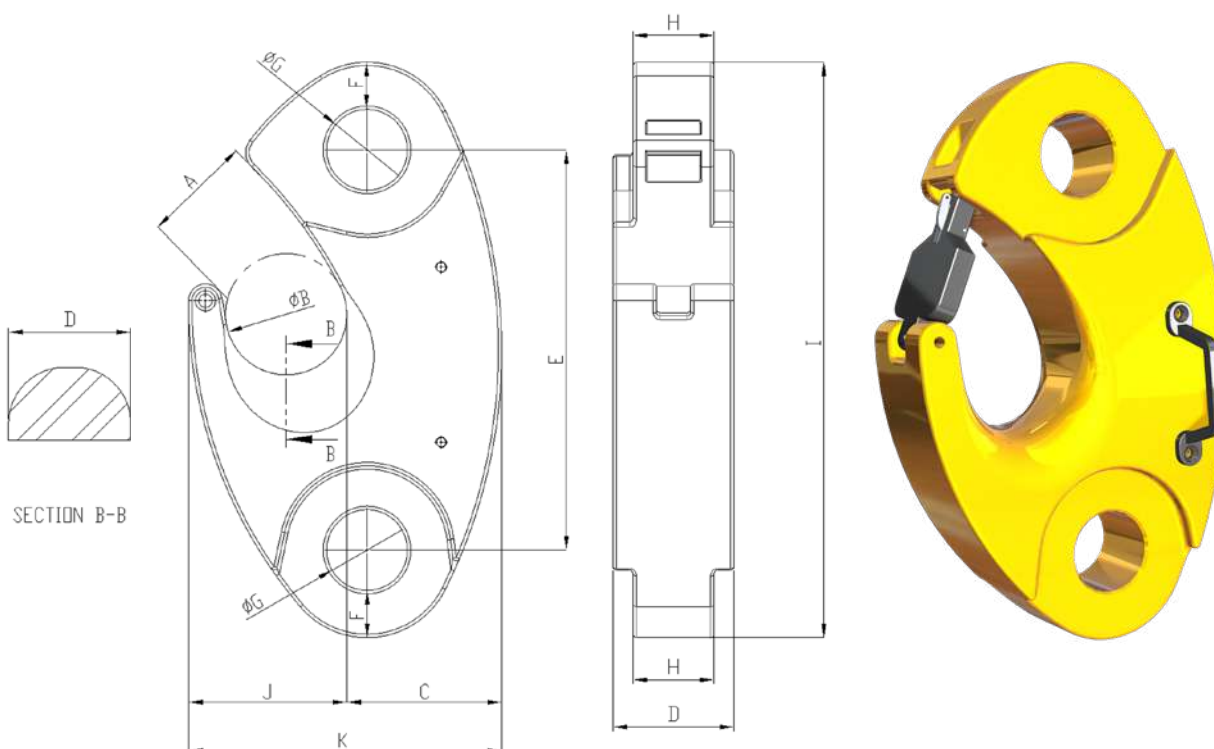

- WLL: from 150t to 500t.
- Hook forged and heat treated. Guaranteed grain orienting.
- Material: carbon, alloys and super alloys.
- Surface Protection & Coatings: upon request
- Safety Factor: min. 4:1.
- Load Test: requested / recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

FORGED ROV HOOKS LOAD TRANSFER ROV EYE HOOK													Weight lbs
Overall dimensions (inch)													
WLL (t)	MBL (t)	A	B	C	D	E	F	G	H	I	J	K	
150	600	6 3/8	7 3/32	9 2/32	7 3/32	23 3/8	2 3/4	8 13/16	4 23/32	33 5/8	9 8/32	18 5/16	639
200	800	7 3/32	8 9/32	10 8/32	7 7/8	26 3/32	3 1/32	5 11/32	5 29/32	37 17/32	11 3/8	21 5/8	970
250	1000	7 7/8	9 27/32	11 13/32	8 13/16	28 1/2	3 17/32	5 29/32	6 15/32	41 1/2	12 25/32	24 7/32	1279
300	1200	8 2/32	11 13/16	12 19/32	9 27/32	33 19/32	3 15/16	6 5/16	6 11/16	47 3/4	15 11/32	27 15/16	1918
400	1600	9 7/16	12 19/32	13 25/32	11 1/32	35 6/32	4 4/32	7 3/32	7 3/32	50 9/16	15 19/32	29 3/8	2326
500	2000	9 27/32	13 3/8	15 11/32	12 13/32	38 29/32	4 11/32	7 15/32	8 15/32	55 1/32	16 27/32	32 7/32	3307

WLL working load limit using R4 material.
Forging tolerances: +/-5%.

FORGED ROV HOOKS

Custom ROV hook

Irizar Forge team can accommodate any forged ROV hook to the specific subsea lifting or mooring operation the market is ready to operate up to 2.000t, from safety, design, material strength and certification point of view.

- WLL: from 20t to 2.000t.
- Hook forged and heat treated (nose welded).
- Material: carbon, alloys and super alloys.
- Surface Protection & Coatings: upon request
- Safety Factor: min. 4:1.
- Load Test: requested / recommended. ILO-3, FAT or Breaking Test available upon request.
- General Tolerances: -0/+7% for forged parts.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

Load transfer hook




Clevis ROV hook



Other CUSTOM ROV hooks designs


- WLL: from 20t to 2.000t.
- Hook forged and heat treated.
- Material: carbon, alloys and super alloys.
- Surface Protection & Coatings: upon request
- Safety Factor: min. 4:1.
- Load Test: requested / recommended. ILO-3, FAT or Breaking Test available upon request.
- General Tolerances: -0/+7% for forged parts.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

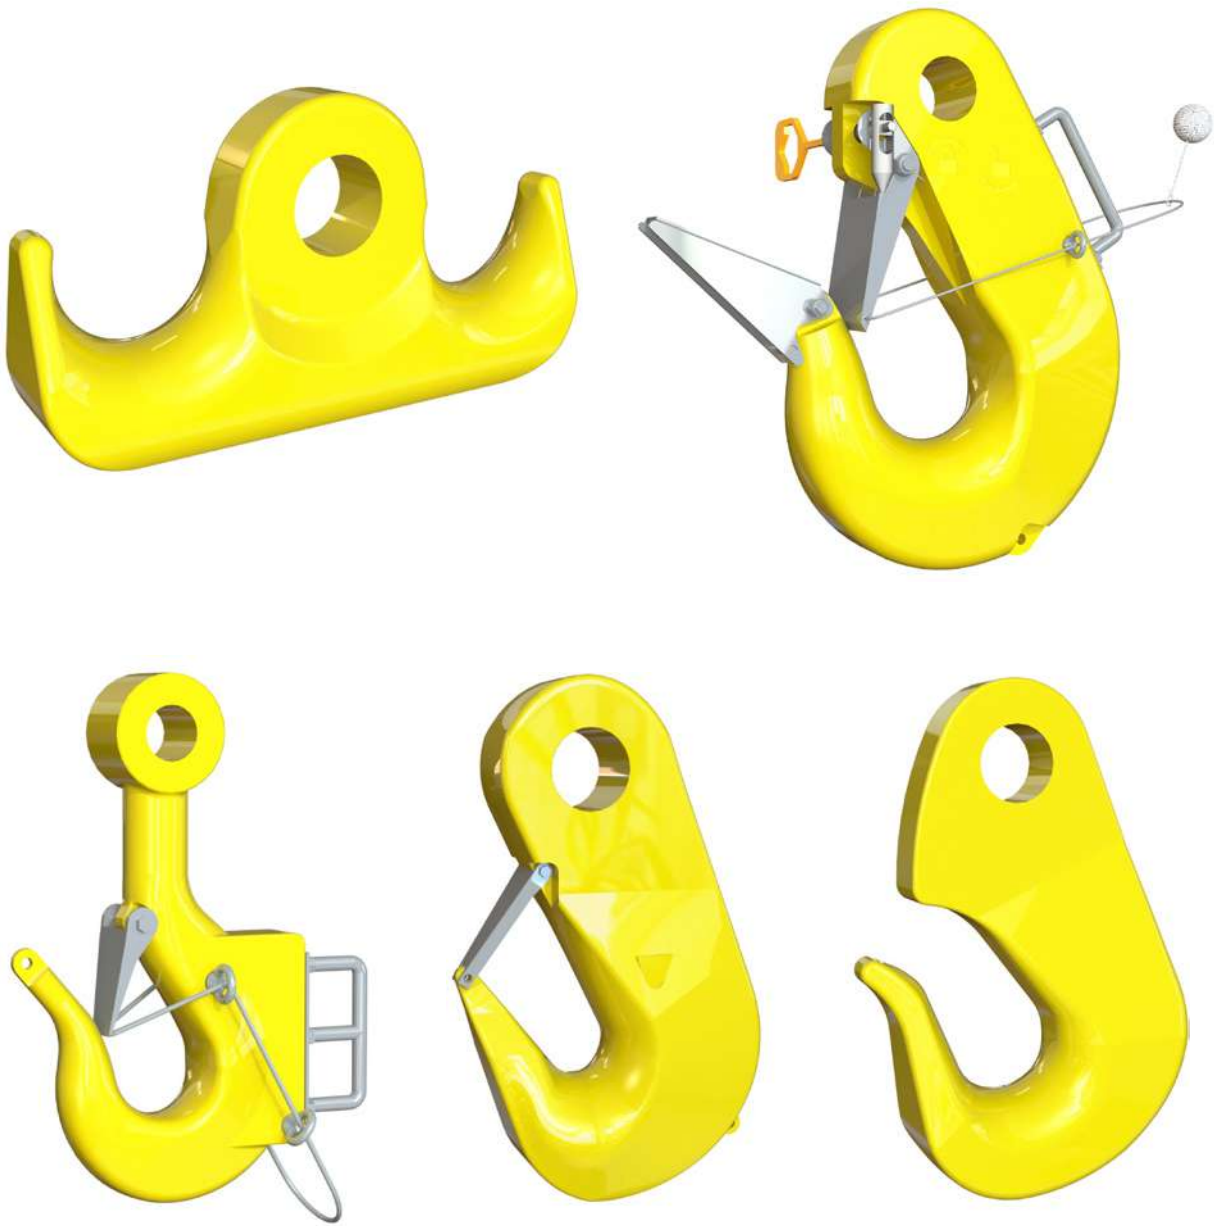

ROV FRIENDLY ACCESSORIES


Safety latch

- Material: stainless steel.
- Useful for: ROV operations opening and closing.
- Additional accessories: monkey fits, rope, eye bolts.
- Test: FAT upon request.

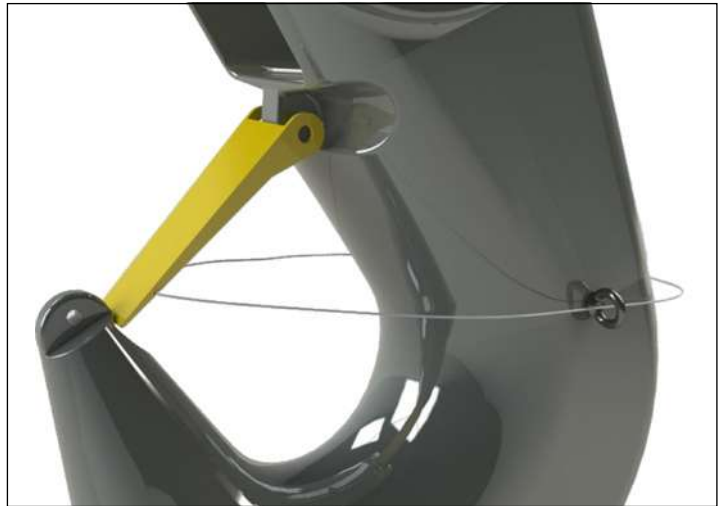

Monkey fist

- Material: textile.
- Suitable for: ROV operations handling.
- Additional accessories: rope.
- Test: FAT upon request.

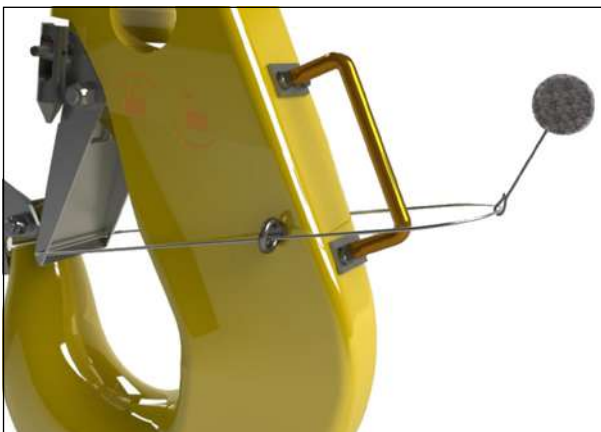

Fishing device

- Material: stainless steel.
- Useful for: fishing and hooking other connectors.
- Additional accessories: rope, eye bolts.
- Test: FAT upon request.



Handles

- Material: stainless steel.
- Suitable for: ROV operations and hook handling.
- Test: FAT upon request.



Padeyes

- Material: non welded, belonging to forging.
- Useful for: hook handling operations.
- Additional accessories: shackle and lifting points.
- Test: FAT upon request.



4. SHACKLES

Intro

Shackle is considered critical accessory from safety point of view because is one of the major hardware link between the crane and the load, and regularly works fix together with chain or non steel fittings as textile slings and similar terminals.

Related to **lifting application**, its considered a fix/static temporary rigging accessory and does not belong to the crane itself. Straight design shackles are regularly used for 1 pull and bow design shackles for various pulls. For heavy duty lifting operations widebody is the referred and valued product, that guarantees a safe radius of the related sling into operation, that guarantees a longer life time of the related sling.

Related to **mooring application**, forged shackle is a great product to link two chains, chain with rope, rope with sling, connected to triplates and masterlinks... or any technology used for floating structures long term mooring lines. Recently other technologies beside steel chain are being used and recommended by installation companies based on two criterias:

- Weight of mooring line in deep water.
- Cost of commissioning & installation.

Irizar Forge is approved by DNV and ABS to produce, test & certify Offshore Mooring Accessories in material R4 according to “DNV-OS-E302 Offshore Mooring Chain” and “ABS Guide for Offshore Mooring Chain”.

Mooring Line is being a combination technology in recent projects, combining steel with fiber products: steel chain, steel wire ropes, synthetic ropes and textile slings. Combination of all 4 technologies is reducing commissioning costs and reducing weight. Shackles and other links are in between different technologies to ensure a permanent steel-fiber, steel-steel or fiber-fiber join or linkage.


Under this specific conditions, forged material is the preferred technology to guarantee safety and long life time. For high safety factors during long life times, super alloy steels are the valued ones to guarantee functionality, safe operating and low maintenance costs during its long life time.

As for forged hooks, all shackles are produced for operating temperatures from -40°F to +392°F, considered normal, abnormal and extreme conditions.



Enjoy the Forged Shackle range in the following pages.

HEAVY DUTY DEE FORGED SHACKLES

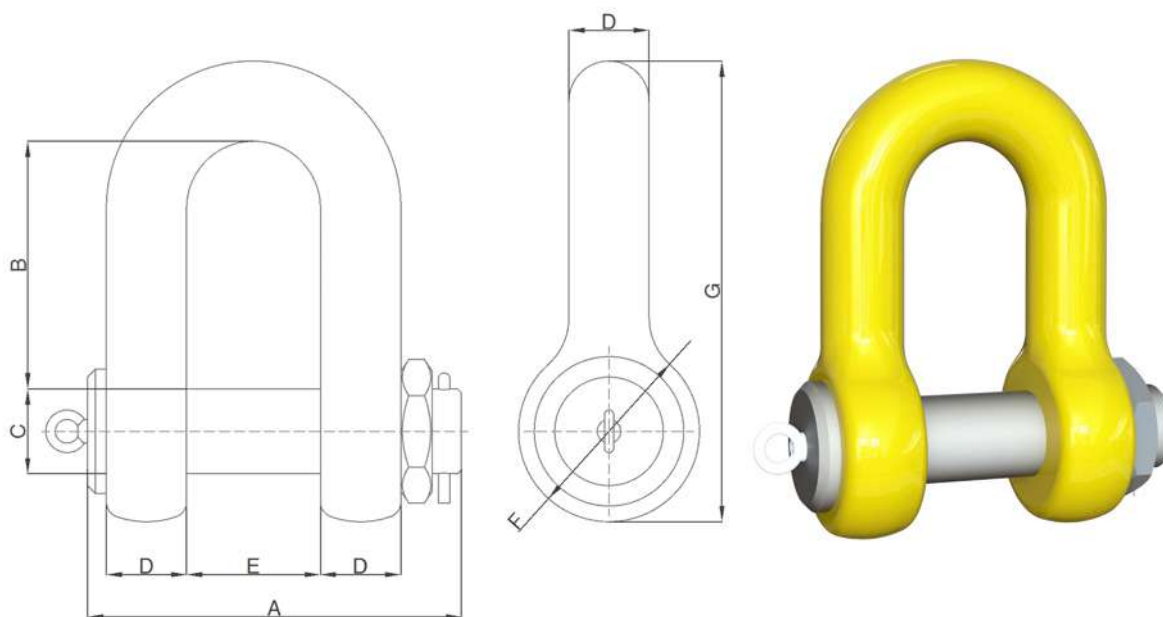


- WLL: from 120t to 550t.
- Shackle forged, heat treated and machined.
- Material: carbon steel, alloy and super alloy.
- Coating Protection: upon request.
- Safety Factor: min. 4:1.
- Load Test: requested and recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

HEAVY DUTY DEE FORGED SHACKLES								
WLL (t)	Overall dimensions (inch)							Weight
	A	B	C	D	E	F	G	lbs
120	16 ¹⁷ / ₃₂	10 ⁵ / ₈	3 ²³ / ₃₂	3 ¹ / ₂	5 ⁷ / ₈	7 ²⁷ / ₃₂	19 ¹³ / ₁₆	220
150	18 ¹¹ / ₁₆	12 ³ / ₈	4 ¹ / ₄	4 /	6 ¹¹ / ₁₆	9 ¹ / ₃₂	23 ¹ / ₁₆	315
175	17 ¹¹ / ₁₆	14 ⁵ / ₃₂	4 ⁵ / ₁₆	3 ²⁹ / ₃₂	5 ⁷ / ₈	8 ²¹ / ₃₂	24 ¹⁹ / ₃₂	298
200	20 ¹⁵ / ₃₂	19 ²¹ / ₃₂	4 ²⁹ / ₃₂	4 ²³ / ₃₂	7 ¹ / ₁₆	10 ⁷ / ₃₂	32	527
250	22 ⁷ / ₃₂	18 ³ / ₃₂	5 ¹ / ₂	5 ³ / ₃₂	7 ²¹ / ₃₂	11	31 ⁹ / ₃₂	591
300	23 ¹³ / ₃₂	19 ²¹ / ₃₂	5 ⁷ / ₈	5 ¹ / ₂	8 ¹ / ₁₆	11 ²⁵ / ₃₂	33 ²¹ / ₃₂	732
350	24 ²⁵ / ₃₂	20 ¹⁵ / ₃₂	6 ⁹ / ₃₂	5 ⁷ / ₈	8 ²¹ / ₃₂	12 ¹⁹ / ₃₂	35 ¹³ / ₁₆	888
400	26 ⁵ / ₃₂	22 ¹³ / ₁₆	6 ¹¹ / ₁₆	6 ⁹ / ₃₂	9 ¹ / ₄	13 ³ / ₈	37 ³¹ / ₃₂	1067
450	27 ¹⁷ / ₃₂	23 ¹⁹ / ₃₂	7 ¹ / ₁₆	6 ¹¹ / ₁₆	9 ¹³ / ₁₆	14 ⁵ / ₃₂	40 ¹¹ / ₃₂	1270
500	28 ²⁹ / ₃₂	24 ¹³ / ₃₂	7 ¹⁵ / ₃₂	7 ¹ / ₁₆	10 ¹³ / ₃₂	14 ¹⁵ / ₁₆	42 ¹ / ₂	1495
550	31 ⁹ / ₃₂	26 ⁵ / ₃₂	8 ⁷ / ₁₆	7 ¹⁵ / ₃₂	11 ⁷ / ₃₂	15 ¹⁵ / ₁₆	45 ²⁷ / ₃₂	1852

WLL: for R4 material grades.
Tolerances: Inner length +/-7,5%, other forged parts +/-5% and machined parts +/-1%.

HEAVY DUTY BOW FORGED SHACKLES

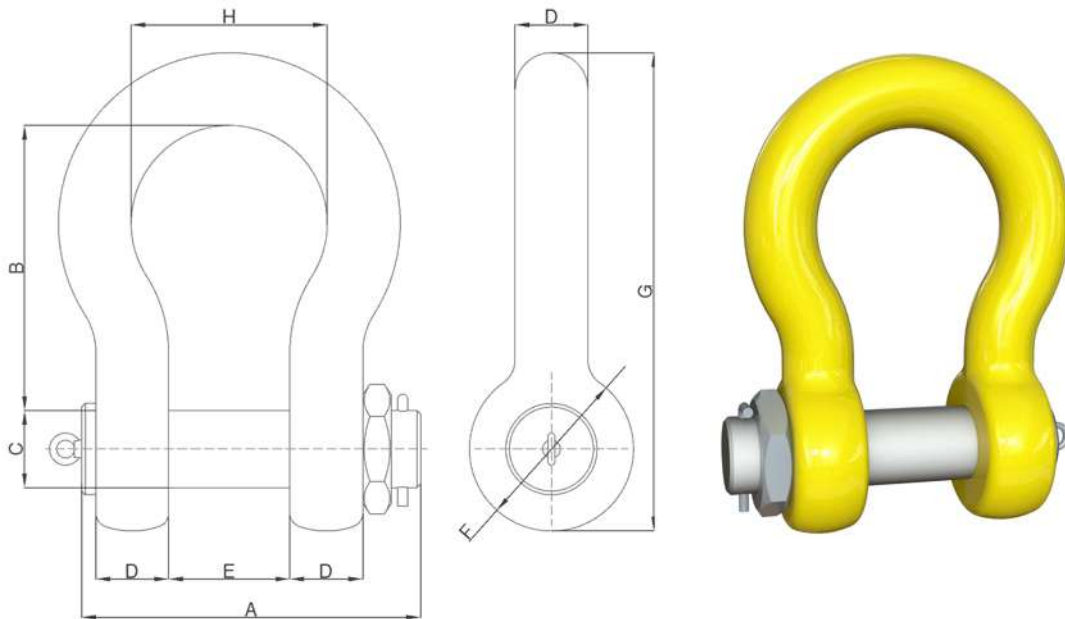


- WLL: from 120t to 2.000t.
- Shackle forged, heat treated and machined.
- Material: carbon steel, alloy and super alloy.
- Coating Protection: upon request.
- Safety Factor: min. 4:1.
- Load Test: requested and recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

HEAVY DUTY BOW FORGED SHACKLES									
Overall dimensions (inch)									Weight
WLL (t)	A	B	C	D	E	F	G	H	lbs
120	16 ¹⁷ / ₃₂	14 ¹⁵ / ₁₆	3 ²³ / ₃₂	3 ¹ / ₂	5 ⁷ / ₈	7 ²⁷ / ₃₂	24 ⁹ / ₃₂	9 ¹¹ / ₃₂	243
150	18 ¹¹ / ₁₆	15 ²³ / ₃₂	4 ¹ / ₄	4	6 ¹¹ / ₁₆	9 ¹ / ₃₂	26 ¹³ / ₃₂	10 ¹³ / ₁₆	353
200	20 ¹⁵ / ₃₂	19 ²¹ / ₃₂	4 ²⁹ / ₃₂	4 ²³ / ₃₂	7 ¹ / ₁₆	10 ⁷ / ₃₂	32	11 ¹³ / ₃₂	518
250	22 ¹ / ₃₂	21 ¹ / ₄	5 ¹ / ₂	4 ²⁹ / ₃₂	8 ¹ / ₁₆	10 ⁷ / ₃₂	34 ¹ / ₃₂	12	628
300	22 ⁷ / ₁₆	23 ¹⁹ / ₃₂	5 ⁷ / ₈	5 ³ / ₃₂	8 ¹ / ₁₆	12	37 ¹¹ / ₁₆	12	750
400	26 ⁵ / ₃₂	26 ³ / ₄	6 ⁷ / ₈	6 ¹⁵ / ₃₂	9 ¹ / ₃₂	13 ³ / ₄	43 ¹⁹ / ₃₂	12 ²⁵ / ₃₂	1235
500	28 ¹¹ / ₃₂	27 ¹⁷ / ₃₂	7 ⁹ / ₃₂	7 ¹ / ₁₆	10 ¹ / ₃₂	14 ⁹ / ₁₆	45 ⁹ / ₁₆	13 ³ / ₄	1510
600	32 ¹ / ₁₆	27 ¹⁷ / ₃₂	8 ¹ / ₁₆	7 ²¹ / ₃₂	11 ⁷ / ₃₂	15 ¹⁵ / ₁₆	47 ⁷ / ₃₂	14 ³ / ₄	1940
700	33 ²⁷ / ₃₂	27 ¹⁷ / ₃₂	8 ¹⁷ / ₃₂	8 ¹ / ₁₆	12 ³ / ₁₆	17 ¹ / ₈	48 ⁷ / ₁₆	15 ²³ / ₃₂	2161
800	34 ¹ / ₄	27 ¹⁷ / ₃₂	8 ¹⁷ / ₃₂	8 ¹ / ₄	12 ³ / ₁₆	17 ¹ / ₈	48 ²¹ / ₃₂	15 ²³ / ₃₂	2425
900	35 ¹³ / ₁₆	27 ¹⁷ / ₃₂	9 ¹ / ₃₂	8 ²¹ / ₃₂	12 ³¹ / ₃₂	18 ⁹ / ₃₂	49 ²⁹ / ₃₂	16 ¹⁷ / ₃₂	2822
1000	37 ³ / ₈	29 ¹ / ₂	9 ⁷ / ₁₆	9 ¹ / ₃₂	13 ³ / ₄	18 ⁷ / ₈	50 ²⁵ / ₃₂	16 ¹⁷ / ₃₂	3219
1250	43 ¹ / ₂	30 ¹¹ / ₁₆	10 ⁵ / ₈	10 ¹⁵ / ₁₆	14 ⁹ / ₁₆	23 ⁷ / ₃₂	58 ²¹ / ₃₂	17 ¹¹ / ₁₆	5115
1500	43 ¹ / ₂	31 ¹⁵ / ₃₂	11 ¹³ / ₃₂	11	14 ⁹ / ₁₆	24	60 ⁷ / ₃₂	17 ¹¹ / ₁₆	5401
1750	48 ¹³ / ₃₂	37 ³ / ₈	12 ³¹ / ₃₂	11 ²⁵ / ₃₂	16 ²⁹ / ₃₂	25 ³¹ / ₃₂	68 ¹¹ / ₁₆	21 ¹ / ₄	7231
2000	51 ⁵ / ₃₂	41 ⁵ / ₁₆	14 ⁵ / ₃₂	12 ¹⁹ / ₃₂	18 ³ / ₃₂	26 ³ / ₄	74 ¹³ / ₃₂	22 ¹ / ₃₂	8642

WLL: for R4 material grades.
Tolerances: Inner length +/-7.5%, other forged parts +/-5% and machined parts +/-1%.

SLING FORGED SHACKLES

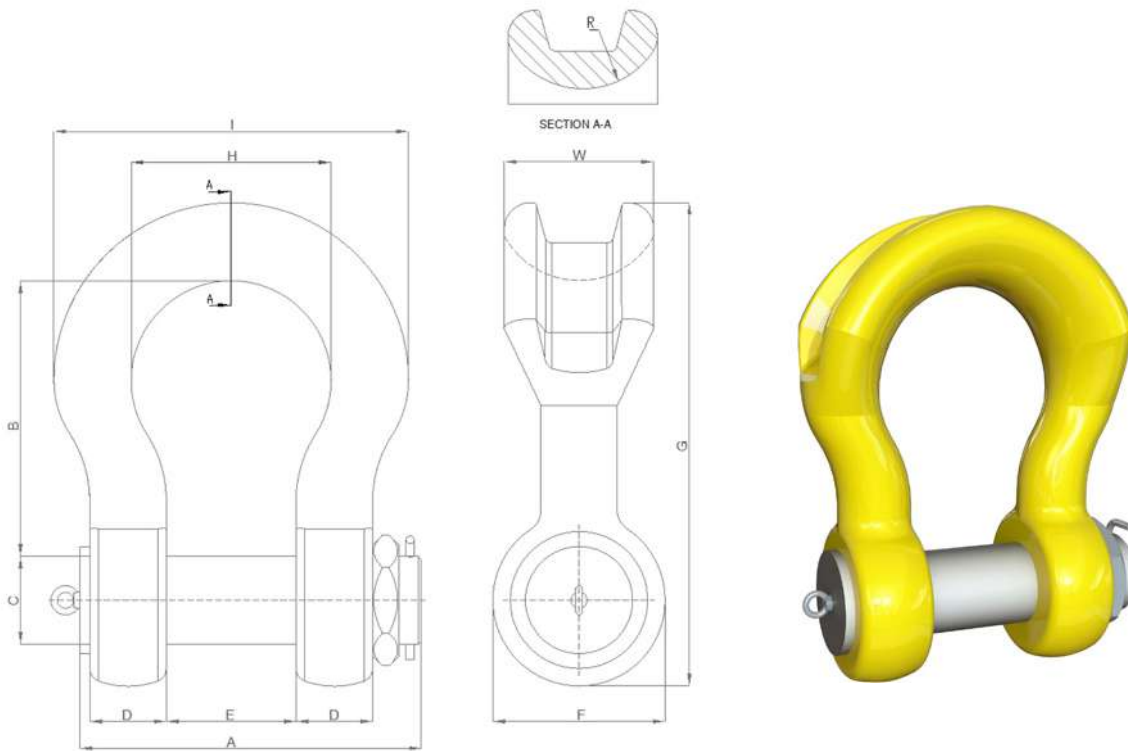


- WLL: from 120t to 4.000t.
- Shackle forged, heat treated and machined.
- Material: carbon steel, alloy and super alloy.
- Coating Protection: upon request.
- Safety Factor: min. 4:1.
- Load Test: requested and recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

SLING FORGED SHACKLES												
Overall dimensions (inch)												Weight
WLL (t)	A	B	C	D	E	F	G	H	I	W	R	lbs
125	15 17/32	14 9/16	3 1/8	3 11/32	5 1/2	6 15/32	22 15/16	8 21/32	15 11/32	5 7/8	3 1/8	183
150	16 17/32	15 23/32	3 23/32	3 17/32	5 7/8	7 27/32	25 3/32	9 13/16	16 7/8	6 11/16	3 17/32	251
200	18 1/2	18 7/8	4 1/8	4 1/8	6 9/32	8 27/32	29 23/32	10 13/16	19 1/32	8 1/16	4 5/16	399
250	20 15/32	21 5/8	4 23/32	4 23/32	7 1/16	9 7/16	33 7/16	11 25/32	21 1/4	9 1/32	4 29/32	558
300	22 13/16	23 19/32	5 1/4	5 1/2	7 21/32	11	37 9/32	13 3/4	24 23/32	10 13/32	5 1/2	805
400	25 25/32	24 13/32	6 9/32	6 9/32	9 1/32	12 31/32	40 23/32	14 9/16	27 1/8	12 19/32	6 11/16	1250
500	27 15/16	26 3/4	7 1/16	6 11/16	10 13/32	13 3/4	44 9/32	17 5/16	30 21/32	13 3/8	7 1/16	1576
600	31 9/32	28 11/32	7 27/32	7 1/16	11 13/32	15 15/16	47 3/4	19 9/32	33 11/32	14 9/16	7 15/32	2099
700	34 5/8	30 11/16	8 7/16	8 1/4	12 19/32	18 9/32	52 11/32	21 1/4	37 21/32	15 23/32	8 1/4	2956
800	36 13/32	31 15/32	9 1/32	8 21/32	12 19/32	18 9/32	53 7/16	21 27/32	38 31/32	16 17/32	8 21/32	3064
900	39 3/4	33 7/16	9 13/16	9 1/4	14 9/16	18 7/8	57 1/16	23 1/32	41 23/32	17 5/16	9 1/4	4590
1000	41 5/16	33 7/16	10 5/8	9 1/4	15 23/32	20 27/32	58 21/32	24 3/16	42 15/16	18 3/32	9 7/16	4663
1250	47 5/8	37 25/32	11 25/32	10 13/16	17 29/32	22 7/16	66 23/32	25 3/8	47 7/16	22 1/32	11 7/32	6345
1550	48 13/16	38 9/16	12 19/32	10 13/16	19 3/32	24	68 11/16	26 3/4	48 13/16	22 13/16	11 13/32	6911
1750	52 5/32	44 3/32	14 5/32	12 3/16	19 21/32	25 31/32	77 5/32	27 17/32	52 31/32	23 19/32	11 25/32	9965
2000	53 23/32	44 7/8	15 5/32	12 19/32	20 15/32	26 3/4	79 3/16	28 11/32	53 27/32	24 13/32	12 3/16	10141
2500	54 5/16	44 7/8	15 23/32	12 31/32	20 15/32	29 1/8	81 9/32	28 23/32	54 7/16	25	12 19/32	11420
3000	55 1/2	44 7/8	16 17/32	13 3/8	20 27/32	29 29/32	81 7/8	29 1/8	55 5/8	25 9/16	12 31/32	12247
3500	58 1/4	44 7/8	17 5/16	13 3/4	21 1/4	31 3/32	83 27/32	29 1/2	58 1/4	26 3/8	13 3/8	14374
4000	59 7/16	44 7/8	18 3/32	14 5/32	21 5/8	31 7/8	84 1/4	29 29/32	59 7/16	27 5/32	13 3/4	15421

WLL: for R4 material grades.
Tolerances: Inner length +/-7,5%, other forged parts +/-5% and machined parts +/-1%.

CUSTOM MADE SHACKLES

Irizar Forge team can accommodate any forged shackle to the specific lifting, rigging or mooring operation the market is ready to operate up to 4.000t, from safety, design, material strength and certification point of view.

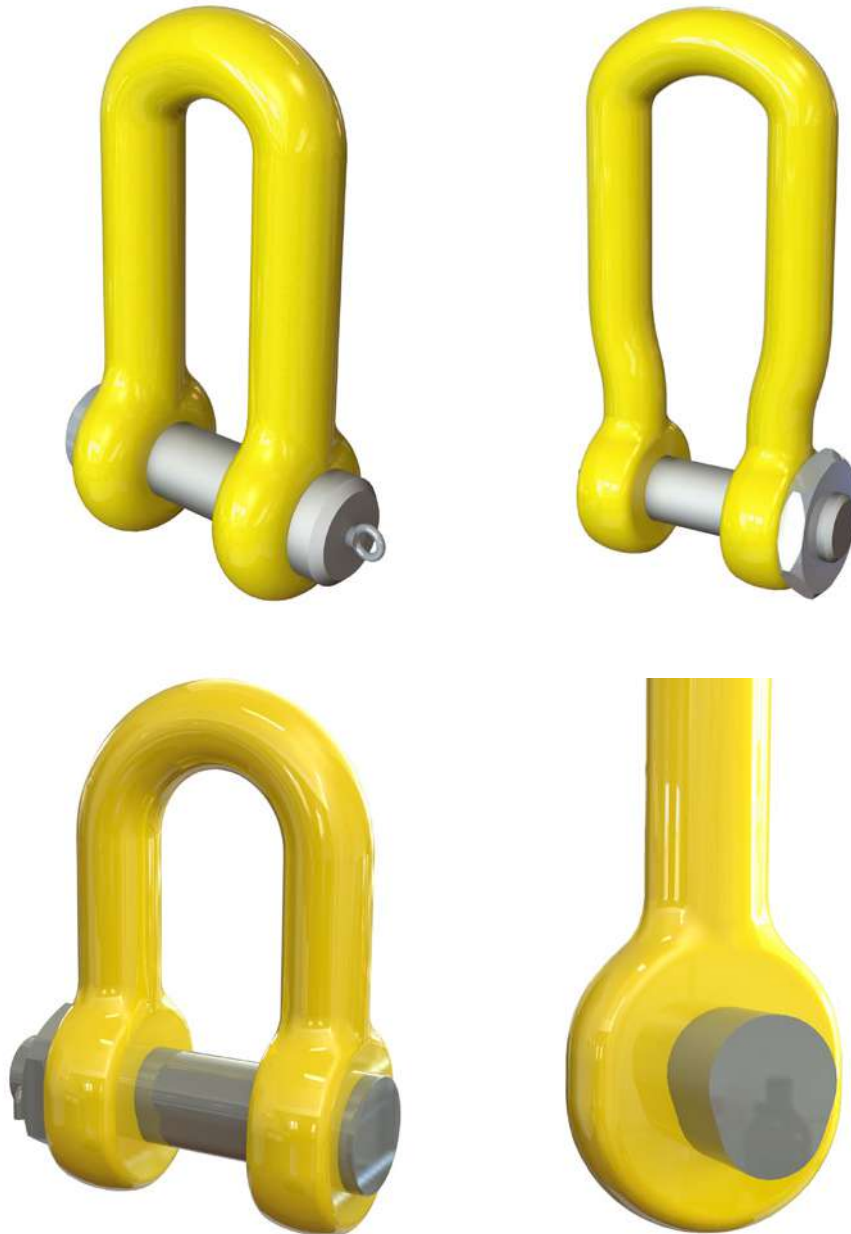

- WLL: from 120t to 4.000t.
- Shackle forged, heat treated and machined.
- Material: carbon steel, alloy and super alloy.
- Coating Protection: upon request.
- Safety Factor: min. 4:1.
- Tolerance: Inner Length +/- 7,5%, other forged parts +/-5% and machined parts +/-1%.
- Load Test: requested and recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.



5. SWIVELS

Intro

Swivels are used in Lifting, Mooring & Anchoring applications, and consequently are considered critical lifting component from safety point of view because is the main turning hardware between the crane and the load. The main difference between Swivel Hook and Block Hook (chapter 2) are pulleys: swivel hook does not need sheaves and the main reason is because there are certain lifting operations where straight lifting is necessary with enough weight and protection to turn.

The key component of the Swivel Hook is the cover: this part is protecting inner machined parts, bearing and thread to guarantee a full turning and proper rotation of the load, and at the same time is giving the necessary weight to avoid rope outlet and crane incidents. Weight and rotating are the main functions of swivel. Regularly this kind of products are used in Offshore environments, where swivels could have two main purposes:

For **Subsea Lifting**, the crane is regularly located top site, even if recently semi-submergible and submergible cranes are being designed and installed. This kind of Offshore cranes regularly do subsea operations even if there are dry cranes too: most of them they do in shallow water, but others do deep water for e.g manifolds recovery, seabed pipeline maintenance or repair is being possible to do operations up to 13.500 feet subsea. For this application regularly Swivel Hooks are used.

For **long term mooring line**, main technology to fix floating structures into the seabed, forged swivels are a great product to link two chains, chain with rope, rope with sling or any technology used for floating structures mooring lines. Recently other technologies beside steel chain are being used and recommended by installation companies based on two criterias:

- Weight of mooring line in deep water.
- Cost of commissioning & installation.



Mooring Line is being a combination technology in recent projects, combining steel with fiber products: steel chain, steel wire ropes, synthetic ropes and textile slings. Combination of all 4 technologies is reducing commissioning costs and reducing weight. Hooks and other links are in between different technologies to ensure a permanent steel-fiber, steel-steel or fiber-fiber join or linkage. For this application regularly Eye-Eye and Eye-Clevis Swivels are used.


In both cases, with hook or without hook, swivels are working submergible and to avoid salty water getting into the inner parts, cover part and sealings are used to guarantee a long life time. Additionally when operation is held in deep water, outer & inner pressure difference is a big issue and sealings are a key factor to avoid any problem and guarantee the bearing is rotating correctly.

Enjoy the Swivel range in the following pages.

SWIVEL HOOKS

CUSTOMIZATION
UPON REQUEST

COMPLETELY
WELDLESS

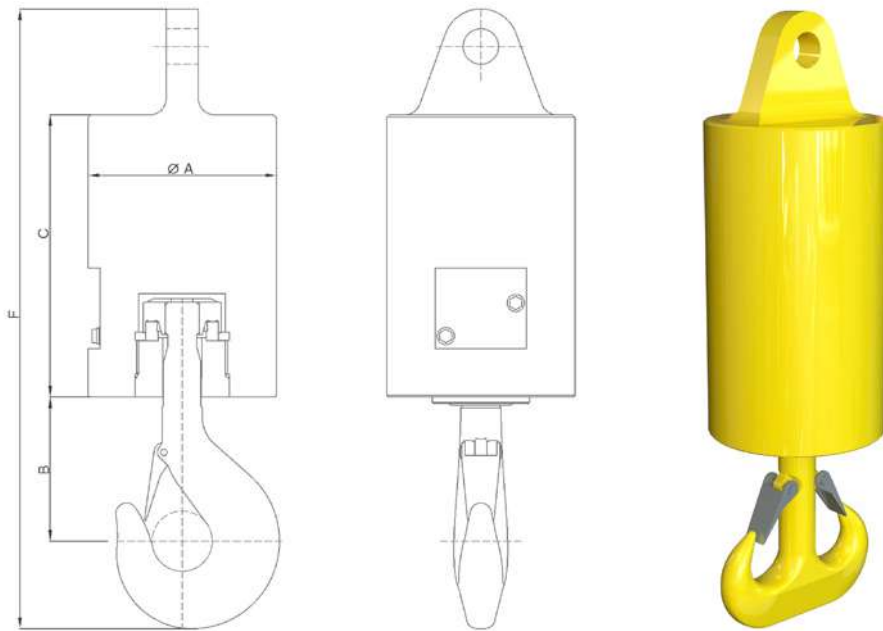


- WLL/SWL: from 50t to 1.500t.
- Hook forged, heat treated and machined, as per DIN15400 design or others upon request.
- Cover: free of weld.
- Material: carbon steel, alloy and super alloy. Most regular super alloy steel.
- Coating Protection: fully painted.
- Safety Factor: 4:1.
- Sealings: for onshore lifting, offshore topsite and subsea lifting & mooring.
- Load Test: requested and recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SWIVEL HOOKS						
Overall dimensions (inch)						Weight
WLL (t)	Hook No	A	B	C	F	lbs
70	25	19 ²¹ / ₃₂	16 ⁷ / ₈	23 ¹⁹ / ₃₂	63 ²⁹ / ₃₂	2205
125	40	23 ¹⁹ / ₃₂	20 ⁹ / ₁₆	22 ⁵ / ₈	71 ²⁹ / ₃₂	3307
150	50	23 ¹⁹ / ₃₂	22 ⁷ / ₁₆	25 ⁹ / ₁₆	70 ³ / ₁₆	2866
200	63	31 ¹⁵ / ₃₂	25 ¹ / ₂	30 ¹¹ / ₁₆	90 ³ / ₃₂	7716
250	80	39 ¹¹ / ₃₂	29 ¹ / ₃₂	47 ⁷ / ₃₂	99	17637
300	100	39 ¹¹ / ₃₂	32 ¹ / ₃₂	68 ⁷ / ₈	131 ⁹ / ₁₆	26455
400	125	39 ¹¹ / ₃₂	35 ³ / ₄	67 ²⁹ / ₃₂	154 ³ / ₄	26455

EYE-EYE SWIVEL

CUSTOMIZATION
UPON REQUEST

COMPLETELY
WELDLESS

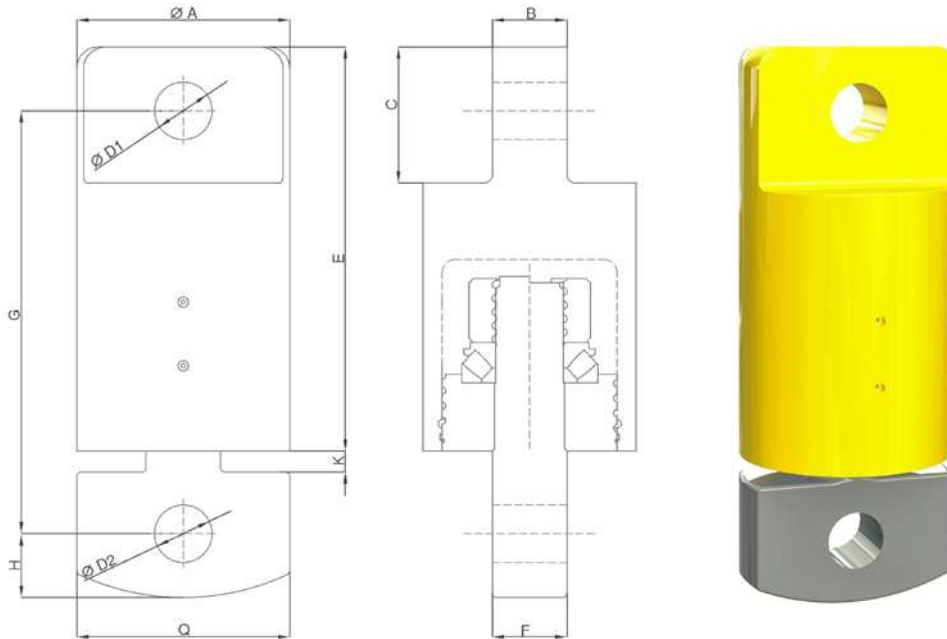


- WLL/SWL: from 50t to 1.500t.
- Hook forged, heat treated and machined, as per DIN15400 design or others upon request.
- Cover: free of weld.
- Material: carbon steel, alloy and super alloy. Most regular super alloy steel.
- Coating Protection: fully painted.
- Safety Factor: 4:1.
- Sealings: for onshore lifting, offshore topsite and subsea lifting & mooring.
- Load Test & MBL: requested and recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SWIVEL EYE-EYE												
Overall dimensions (inch)												Weight
WLL (t)	A	B	C	D1	D2	E	F	G	H	K	Q	lbs
200	19 ²¹ / ₃₂	6 ⁷ / ₈	12 ¹⁹ / ₃₂	5 ⁵ / ₁₆	5 ⁵ / ₁₆	37 ³ / ₈	6 ⁷ / ₈	39 ⁵ / ₃₂	5 ⁷ / ₈	1 ¹⁵ / ₁₆	19 ²¹ / ₃₂	2456
300	23 ¹⁹ / ₃₂	7 ²⁷ / ₃₂	14 ¹¹ / ₃₂	6 ³ / ₃₂	6 ³ / ₃₂	43 ⁹ / ₃₂	7 ²⁷ / ₃₂	45 ¹ / ₄	7 ¹ / ₁₆	1 ¹⁵ / ₁₆	23 ¹⁹ / ₃₂	4059
400	25 ⁹ / ₁₆	8 ⁷ / ₈	16 ¹ / ₈	7 ¹ / ₁₆	7 ¹ / ₁₆	45 ¹ / ₄	8 ⁷ / ₈	47 ⁷ / ₃₂	8 ¹ / ₁₆	1 ¹⁵ / ₁₆	25 ⁹ / ₁₆	4740

EYE-CLEVIS SWIVEL

CUSTOMIZATION
UPON REQUEST

COMPLETELY
WELDLESS

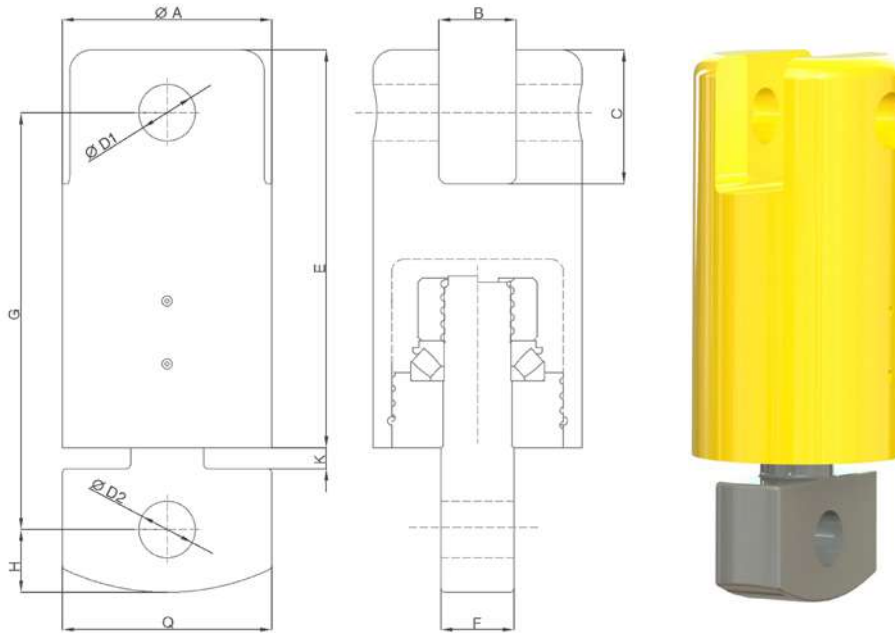

- WLL/SWL: from 50t to 1.500t.
- Hook forged, heat treated and machined, as per DIN15400 design or others upon request.
- Cover: free of weld.
- Material: carbon steel, alloy and super alloy. Most regular super alloy steel.
- Coating Protection: fully painted.
- Safety Factor: 4:1.
- Sealings: for onshore lifting, offshore topsite and subsea lifting & mooring.
- Load Test & MBL: requested and recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SWIVEL EYE-CLEVIS												
Overall dimensions (inch)											Weight	
WLL (t)	A	B	C	D1	D2	E	F	G	H	K	Q	lbs
200	19 ²¹ / ₃₂	7 ⁹ / ₃₂	12 ¹⁹ / ₃₂	5 ⁵ / ₁₆	5 ⁵ / ₁₆	37 ³ / ₈	6 ⁷ / ₈	39 ⁵ / ₃₂	5 ⁷ / ₈	1 ¹⁵ / ₁₆	19 ²¹ / ₃₂	2006
300	23 ¹⁹ / ₃₂	8 ¹ / ₄	14 ¹¹ / ₃₂	6 ³ / ₃₂	6 ³ / ₃₂	43 ⁹ / ₃₂	7 ²⁷ / ₃₂	45 ¹ / ₄	7 ¹ / ₁₆	1 ¹⁵ / ₁₆	23 ¹⁹ / ₃₂	3740
400	25 ⁹ / ₁₆	8 ¹ / ₂	16 ¹ / ₈	7 ¹ / ₁₆	7 ¹ / ₁₆	45 ¹ / ₄	8 ⁷ / ₈	47 ⁷ / ₃₂	8 ¹ / ₁₆	1 ¹⁵ / ₁₆	25 ⁹ / ₁₆	4565

6. CONNECTORS

Intro

Connectors or Links are used both for Lifting as well as Mooring Applications and it is considered critical accessory from safety point of view because is one of the major hardware link between the crane and the load, and regularly works fix together with chain or non steel fittings as textile slings and similar terminals.

For **Lifting application**, connectors are considered as rigging accessories, consequently the links are not belonging to the crane itself, but as a separate and temporary crane accessory.

For **Subsea Mooring**, links & connectors are considered part of the long term mooring line for floating platforms. Regularly floating platforms are located in deep water seas.

Subsea Deep Water application is considered one of the most critical Offshore application because of the poor accessibility of the products, harsh environment and high costs to get the products back to top site. Consequently maintenance jobs are difficult to manage and long life times are required.

Under these conditions, forged material is the preferred & valued technology to guarantee long life times with low maintenance costs. For high safety factor during long life time, super alloy steels are the preferred steel grades to guarantee a safe functional long life products. Surface protection & coatings have also a key role to keep designed life times.

Related to connectors, because its geometry, can comply with different purposes, being the main ones: Related to **lifting**, the main connector is Master Link besides shackles (see chapter 4 Shackles) and its considered crane accessories not belonging to the crane itself. Crane can be an onshore or offshore crane: the latest can be dry operation or subsea operations: most of them they do in shallow water,



but others do deep water for e.g manifolds recovery, seabed pipeline maintenance or repair is being possible to do operations up to 13.500 feet subsea.

Related to **long term Mooring Line**, the most popular connector designs are H-Link & Y-Links as preferred product to link two chains, chain with rope, rope with sling or any technology used for floating structures mooring lines. Recently other technologies beside steel chain are being used and recommended by installation companies based on two criterias:

- Weight of mooring line in deep water.
- Cost of commissioning & installation.



Irizar Forge is approved by DNV and ABS to produce, test & certify Offshore Mooring Accessories in material R4 according to “DNV-OS-E302 Offshore Mooring Chain” and “ABS Guide for Offshore Mooring Chain”.

Mooring Line is being a combination technology in recent projects, combining steel with fiber products: steel chain, steel wire ropes, synthetic ropes and textile slings. Combination of all 4 technologies is reducing commissioning costs and reducing weight. Links & connectors are in between different technologies to ensure a permanent steel-fiber, steel-steel or fiber-fiber join or linkage.

Enjoy the Connectors range in the following pages.

HEAVY DUTY MASTER LINK

**COMPLETELY
WELDLESS**

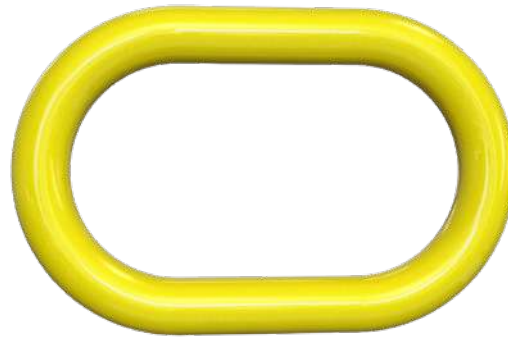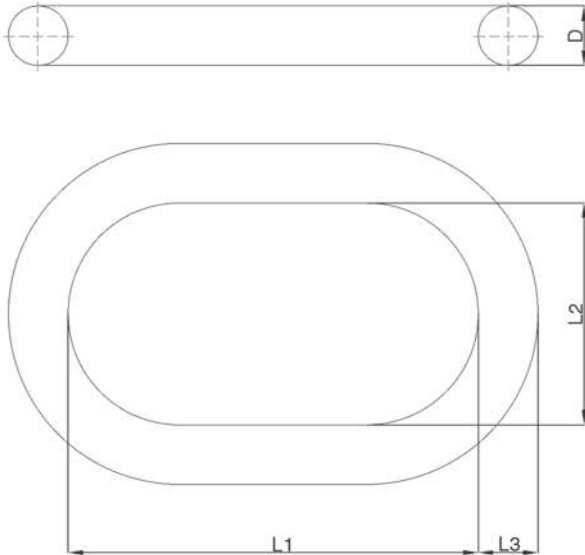

- WLL: from 155t to 1.500t.
- Master links forged and heat treated.
- Material: carbon steel, alloy and super alloy.
- Coating Protection: upon request.
- Safety Factor: 5:1.
- Load Test: requested and recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

CONNECTORS HEAVY DUTY MASTER LINK						
Overall dimensions (inch)						Weight
WLL (t)	MBL (t)	D	L1	L2	L3	lbs
131	524	1 ¹¹ / ₃₂	1 ¹³ / ₁₆	1 ⁶ / ₃₂	1 ¹¹ / ₃₂	170
157	628	1 ¹³ / ₃₂	1 ³² / ₃₂	1 ⁶ / ₃₂	1 ¹³ / ₃₂	227
250	1000	1 ¹⁴ / ₃₂	2 ³ / ₈	1 ⁹ / ₁₆	1 ¹⁴ / ₃₂	364
300	1200	1 ¹⁴ / ₃₂	2 ³ / ₈	1 ⁶ / ₃₂	1 ¹⁴ / ₃₂	353
400-1	2000	1 ¹⁴ / ₃₂	1 ¹⁵ / ₁₆	3 ¹ / ₃₂	1 ¹⁴ / ₃₂	298
400-2	2000	1 ¹⁴ / ₃₂	2 ³ / ₄	3 ¹ / ₃₂	1 ¹⁴ / ₃₂	373
400-3	1600	2 ⁰ / ₃₂	3 ⁵ / ₃₂	1 ⁹ / ₁₆	2 ⁶ / ₃₂	1157
500	2000	2 ² / ₃₂	3 ⁵ / ₃₂	1 ⁹ / ₁₆	2 ⁸ / ₃₂	1429
600	2400	2 ⁵ / ₃₂	3 ⁵ / ₃₂	1 ⁹ / ₁₆	2 ⁹ / ₃₂	1682
700	2800	2 ⁶ / ₃₂	3 ¹¹ / ₃₂	1 ⁹ / ₁₆	3 ⁰ / ₃₂	1841
800	3200	2 ⁶ / ₃₂	3 ¹¹ / ₃₂	1 ⁹ / ₁₆	3 ¹ / ₃₂	2033
900	3600	2 ⁹ / ₃₂	3 ¹⁷ / ₃₂	1 ⁹ / ₁₆	1 ² / ₃₂	2606
1000	4000	3 ⁰ / ₃₂	3 ¹⁷ / ₃₂	1 ⁹ / ₁₆	1 ³ / ₃₂	2848
1250	5000	1 ¹ / ₃₂	3 ¹⁵ / ₁₆	1 ⁹ / ₁₆	1 ⁷ / ₃₂	3737
1500	6000	1 ² / ₃₂	3 ¹⁵ / ₁₆	1 ⁹ / ₁₆	1 ⁸ / ₃₂	4039

Forging tolerances +/-5%.

CRANE HOOKS

CRANE BLOCKS

SUBSEA HOOKS


SHACKLES

SWIVELS

CONNECTORS

ROPE ACCESSORIES

TRIPLATE

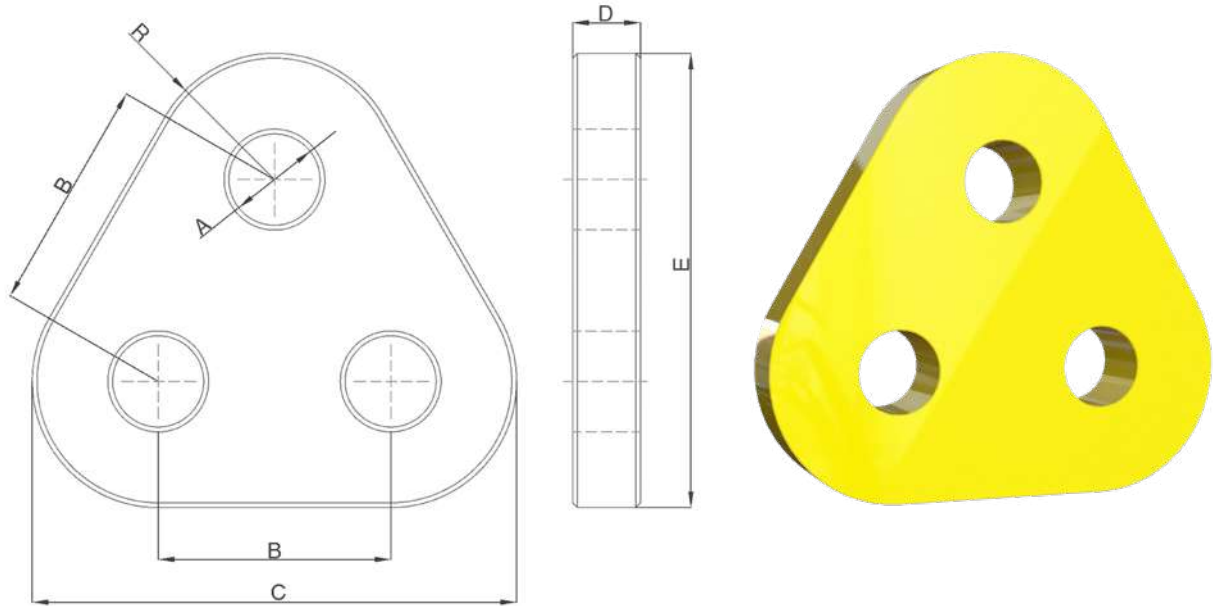

- WLL: from 120t to 700t.
- Triplates forged, heat treated and machined.
- Material: carbon steel, alloy and super alloy.
- Coating Protection: upon request.
- Safety Factor: min. 4:1.
- Load Test: requested and recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.

CONNECTORS STANDARD TRIPLATE							
Overall dimensions (inch)							Weight
WLL (t)	A	B	C	D	E	R	lbs
120	4 1/8	11	24 13/32	3 29/32	22 29/32	6 11/16	414
150	4 1/2	12 19/32	27 5/32	4 5/16	25 15/32	7 9/32	564
175	4 1/2	12 19/32	27 15/16	4 5/16	26 1/4	7 21/32	604
200	5 1/2	15 11/32	32 9/32	4 23/32	30 7/32	8 7/16	860
250	5 7/8	15 11/32	34 1/4	5 1/2	32 3/16	9 7/16	1142
300	6 9/32	16 17/32	36 7/32	5 7/8	34	9 13/16	1360
400	7 9/32	19 9/32	42 29/32	7 27/32	40 5/16	11 25/32	2579
500	7 21/32	21 5/8	50	7 27/32	47 1/16	14 5/32	3569
600	8 21/32	23 19/32	55 3/32	7 27/32	51 15/16	15 23/32	4348
700	9 1/32	23 19/32	55 3/32	9 13/16	51 15/16	15 23/32	5406

Tolerances: machined surface tolerance +/-1%. +/-5% for D dimension.

CUSTOM CONNECTORS

Irizar Forge team can accommodate any forged connector to the specific lifting, rigging or mooring operation the market is ready to operate up to 1.500t, from safety, design, material strength and certification point of view.

- WLL: from 155t to 1.500t.
- Y Link, H Link, Twin Plate and Double Pin Connector forged and heat treated.
- Material: carbon steel, alloy and super alloy.
- Coating Protection: upon request.
- General Tolerances: +/-5% forged parts and machined parts +/-1%.
- Safety Factor: min. 4:1.
- Load test requested and recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert (R4) with ABS and DNV upon request.


Y Links




H Links



Twin plate

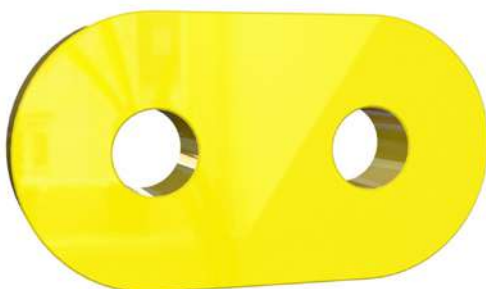

Double Pin Connector

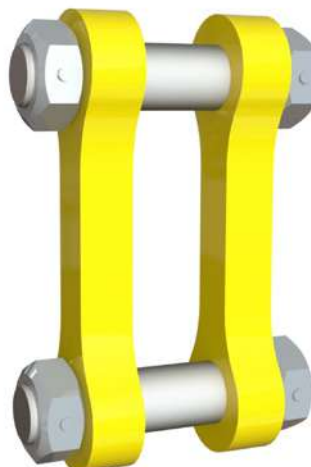

7. ROPE ACCESSORIES

Intro

In this guide Rope Accessories are divided into Sheaves and Sockets.

Sheave or Pulley has always been connected to the rope industry because sheave is the vehicle for the rope to move: sheave is the road and bearing is the motor/vehicle to make the movement faster or slower.

Sheaves can be used in a crane (to guide ropes) and out of a crane equipment wherever the rope is.



Last decades ropes have suffered a big development based in metallurgical R&D: rope diameter has been decreased thanks to wire ropes advanced technology using more flexible wire ropes, reducing rope diameter and increasing strength thanks to very advanced materials, having decreased the historical factor “rope diameter (d1) x factor = sheave diameter (D)”.

The number of sheaves in the hook block for instance will depend on the total WLL of the hookblock and individual sheave WLL: falls is called to the twisted rope, whereas 1 sheave has always 2 falls, 2 sheaves have 4 falls...


Sheaves or pulleys can be manufactured in several materials (carbon steel, alloy steel, technical plastic) based on the purpose of it. Steel made sheaves can be forged, laminated plate and casting. Forged/casted ones are considered weldfree and plate ones regularly have welding points.

Diferents hardness in the groove can be achieved dependig on the material and the induction treatment.

Bearing is naturally linked to the sheave to get movement and rope can turn: depending on the sheave, load and design main purpose, bearings can be roller bearing, ball bearing, bronze bushing, etc, depending on customer requirements. Proof Test Load (PTL) is being performed at Irizar benches in order cover a full guarantee to the crane operator.

Related to sockets it is considered rope terminal hardware (wirerope end fitting). Depending on the customer requirements, forged socket, close or open type, can be designed and manufactured to comply with the specific lifting, rigging, anchoring, fastening or mooring operations. Regularly forged sockets are required for mooring operations for permanent mooring systems and long term mooring lines.


Sockets can be manufactured in different materials (carbon, alloy and super alloy steel) and designed for the specific rope diameter and capacity required by the application with a minimum safety factor of 4:1. With the correct assembly into the wire rope, socket can meet the breaking strength of the wire rope.

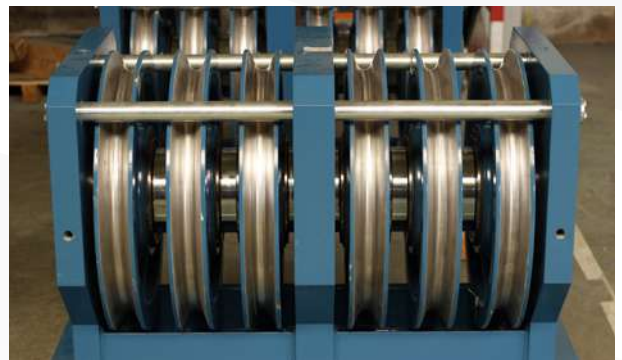

Enjoy the Rope Accessories range in the following pages.

SHEAVES

Metallic sheaves
 Welded sheaves
 One plate sheave

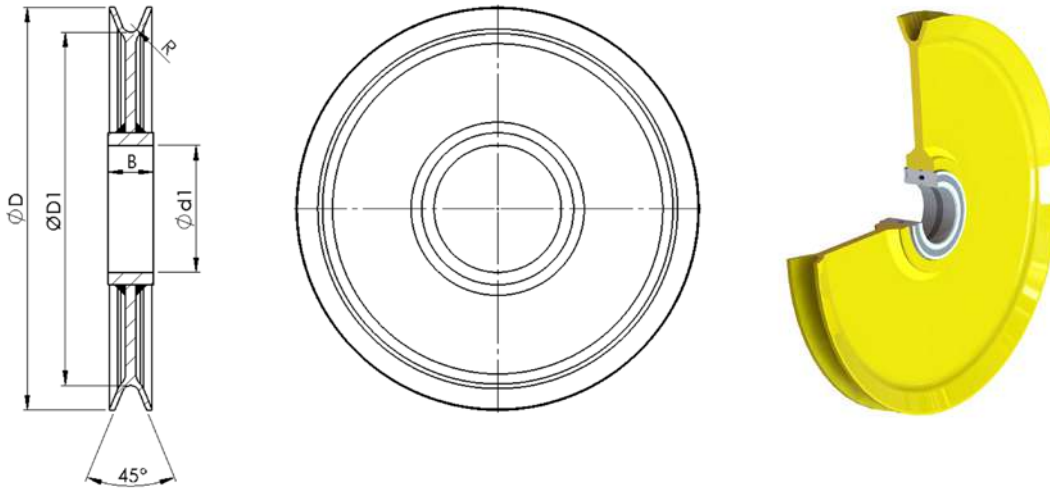

- Material (steel): cold laminated 1 plate + 1 welding
 - Plates: S275JR
 - Hub: S355
- “D” diameter from Ø6.3 inches to Ø31,5 inches.
- Hardness (groove): min 200HB.
 Further by induction treatment upon request.
- Coating Protection: fully painted.
- Rope diam: acc to customer requirement.
- Assembly: with bearing upon request. FAT upon request.
- Certificate: EN10204-3.1. For 3.2, and Load Test upon request.


METALLIC WELDED SHEAVES ONE PLATE SHEAVE									
Overall dimensions (inch)									Weight
No (Ø)	D1	D	d1	B	R	Rope	Bearing Ref.	Shaft Ø	lbs
160	6 ⁹ / ₃₂	7 ¹⁷ / ₃₂	2 ¹⁵ / ₁₆	1 ³ / ₈	⁵ / ₃₂	⁵ / ₁₆	6009-2RS	1 ³ / ₄	8
200	7 ²⁷ / ₃₂	9 ⁷ / ₁₆	3 ¹¹ / ₃₂	1 ¹⁹ / ₃₂	³ / ₁₆	³ / ₈	6209-2RS	1 ³ / ₄	11
280	11 ¹ / ₃₂	13 ³ / ₁₆	4 ⁵ / ₁₆	1 ⁷ / ₈	⁵ / ₁₆	⁵ / ₈	6212-2RS	2 ¹¹ / ₃₂	26
355	13 ³¹ / ₃₂	16 ⁵ / ₁₆	5 ⁷ / ₈	2 ¹¹ / ₃₂	¹¹ / ₃₂	¹¹ / ₁₆	6217-2RS	3 ¹¹ / ₃₂	39
450-1	17 ¹¹ / ₁₆	20 ¹⁵ / ₃₂	7 ¹ / ₁₆	2 ¹³ / ₁₆	¹⁵ / ₃₂	¹⁵ / ₁₆	6220-2RS	3 ²⁹ / ₃₂	75
450-2	17 ¹¹ / ₁₆	20 ¹⁵ / ₃₂	5 ⁷ / ₈	2 ¹ / ₈	¹⁵ / ₃₂	¹⁵ / ₁₆	SL04 5020PP	3 ²⁹ / ₃₂	69
550	21 ⁵ / ₈	24 ²⁵ / ₃₂	7 ¹ / ₁₆	2 ¹⁷ / ₃₂	¹⁷ / ₃₂	³¹ / ₃₂	SL04 5024PP	4 ²³ / ₃₂	95
650	25 ⁹ / ₁₆	28 ²⁹ / ₃₂	8 ²⁷ / ₃₂	3 ³ / ₁₆	⁹ / ₁₆	1 ³ / ₃₂	SL04 5030PP	5 ⁷ / ₈	148

SHEAVES

Metallic sheaves

Welded sheaves

Two plates sheave

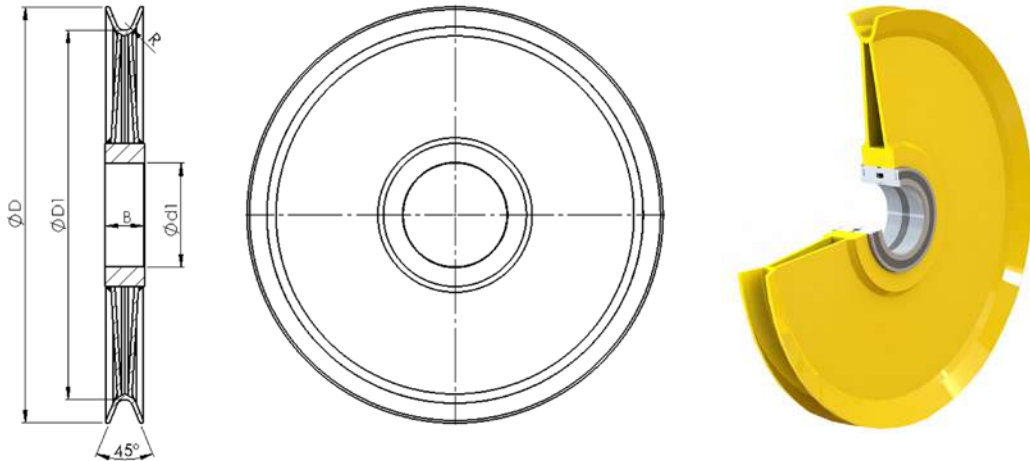

- Material (steel): cold laminated 2 plates + 2 welding
 - Rim: S355J2
 - Plates: S355J2+N
 - Hub: E355
- “D” diameter from Ø6.3 inches to Ø79 inches.
- Hardness (groove): min 200HB.
Further by induction treatment upon request.
- Coating Protection: fully painted.
- Rope diam: acc to customer requirement.
- Assembly: with bearing upon request.
FAT upon request.
- Certificate: EN10204-3.1. For 3.2, and Load Test upon request.


METALLIC WELDED SHEAVES TWO PLATES SHEAVE									
Overall dimensions (inch)									Weight
No (Ø)	D1	D	d1	B	R	Rope	Bearing Ref.	Shaft Ø	lbs
500	19 ²¹ / ₃₂	22 ¹ / ₃₂	5 ¹ / ₂	2 ¹ / ₈	¹³ / ₃₂	²⁵ / ₃₂	SL04 5018PP	3 ¹⁷ / ₃₂	83
560	22 ¹ / ₃₂	24 ²⁵ / ₃₂	5 ⁷ / ₈	2 ¹ / ₈	¹⁵ / ₃₂	²⁷ / ₃₂	SL04 5020PP	3 ²⁹ / ₃₂	99
630	24 ²⁵ / ₃₂	27 ¹⁵ / ₁₆	6 ¹¹ / ₁₆	2 ¹⁷ / ₃₂	¹⁷ / ₃₂	1 ¹ / ₃₂	SL04 5022PP	4 ⁵ / ₁₆	122
710	27 ¹⁵ / ₁₆	31 ¹⁵ / ₃₂	7 ¹ / ₁₆	2 ¹⁷ / ₃₂	⁹ / ₁₆	1 ³ / ₃₂	SL04 5024PP	4 ²³ / ₃₂	154
800	31 ¹⁵ / ₃₂	35 ¹³ / ₃₂	7 ²⁷ / ₃₂	3 ¹ / ₃₂	¹¹ / ₁₆	1 ¹ / ₄	SL04 5026PP	5 ³ / ₃₂	203
900	35 ¹³ / ₃₂	39 ³ / ₄	8 ¹ / ₄	3 ¹ / ₃₂	³ / ₄	1 ¹³ / ₃₂	SL04 5028PP	5 ¹ / ₂	291

SHEAVES

Metallic sheaves

Free of weld sheaves

Solid sheaves

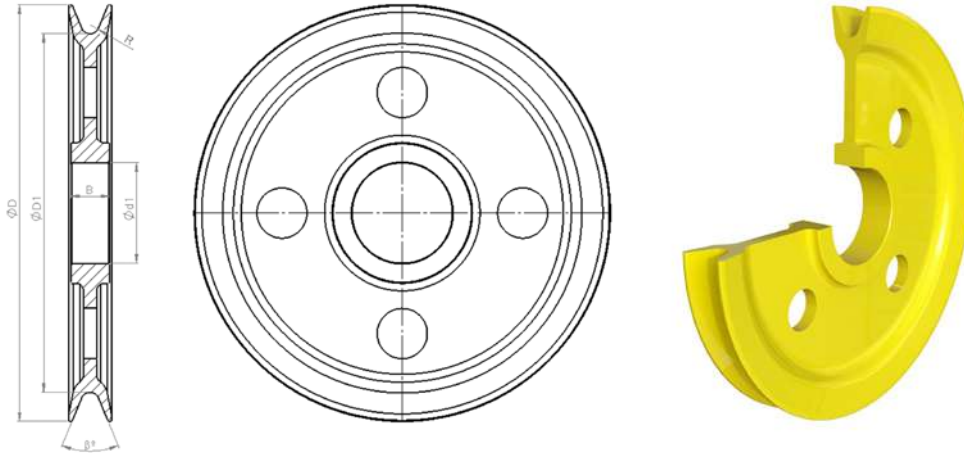


- Material: Completely machined from solid.
 - Carbon steel.
 - Alloy steel.
- “D” diameter up to Ø79 inches.
- Hardness: groove hardness depends on steel grade & treatments. Induction treatment upon request.
- Coating Protection: fully painted.
- Rope diam: acc to customer requirement.
- Assembly: with bearing upon request. FAT upon request.
- Certificate: EN10204-3.1. For 3.2, and Load Test upon request.

FORGED SOCKETS

Irizar Forge team can accommodate any forged socket to the specific lifting, rigging or mooring operation the market is ready to operate up to 320t, from safety, design, material strength and certification point of view.


- WLL: 320t.
- Swivel forged, heat treated and fully machined.
- Material: carbon, alloys and super alloys.
Most regular: super alloy steel.
- Rope diameter: acc to customer requirement.
- Safety Factor: min. 5:1.
- Surface Protection & Coatings: upon request.
- Sealings: upon request for subsea and offshore apps.
- Load Test: requested / recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

Open forged sockets

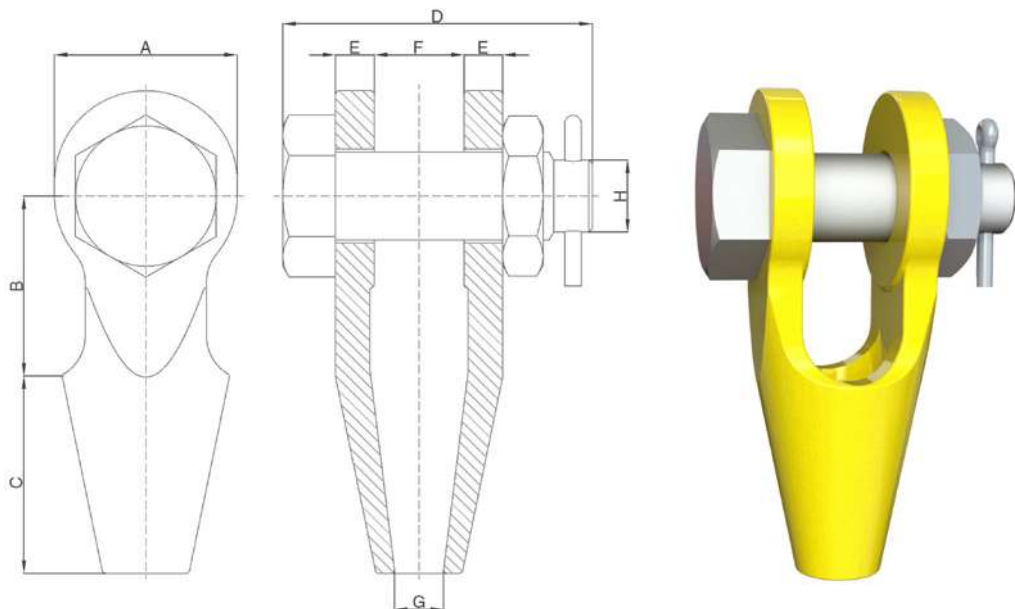


FORGED SOCKETS OPEN FORGED SOCKETS												
Overall dimensions (inch)												Weight
Art. No	Wire Ø inch	WLL (t)	MBL (t)	A	B	C	D	E	F	G	H	lbs
IFSSS-140	3 1/4 - 3 3/8	140	700	11 1/4	11 23/32	12 31/32	16 7/32	3 3/32	6 1/4	3 19/32	5 1/2	494
IFSSS-150	3 1/2 - 3 5/8	150	750	12 3/16	12 1/2	14	17	3 1/4	6 23/32	3 7/8	5 31/32	617
IFSSS-190	3 3/4 - 4	190	950	13 27/32	13 1/2	15	18 1/4	3 1/2	7 1/2	4 1/4	7	833
IFSSS-240	4 1/2	240	1200	16 29/32	18 7/8	18 3/32	20 1/16	3 31/32	8 3/16	4 29/32	7 15/32	1243
IFSSS-280	5	280	1400	21 5/8	19 21/32	19 21/32	22 1/32	4 23/32	8 1/4	5 13/32	9 13/16	2033
IFSSS-400	5 1/2 - 6	400	2000	23 7/32	19 21/32	22 13/16	24 13/32	5 1/2	9 1/32	6 9/32	10 13/16	2855
IFSSS-500	6 1/2	500	2500	25 3/16	23 19/32	26 9/16	27 15/16	6 7/8	12 3/16	6 7/8	11 13/32	4299

Close forged sockets

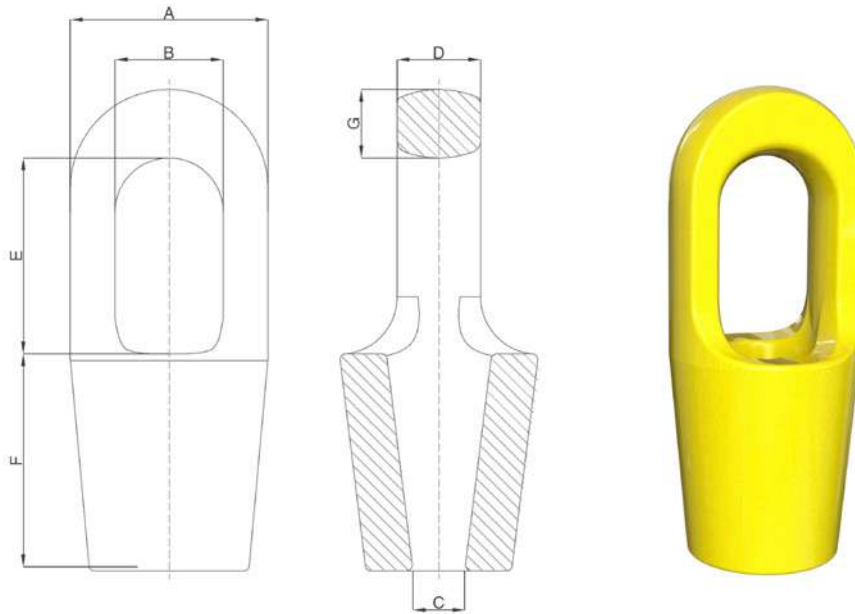

FORGED SOCKETS CLOSE FORGED SOCKETS											
Overall dimensions (inch)											Weight
Art. No	Wire Ø inch	WLL (t)	MBL (t)	A	B	C	D	E	F	G	lbs
IFCSS-140	3 1/4 - 3 3/8	140	700	12 7/32	7 7/32	3 19/32	5 23/32	12 7/32	12 31/32	4	315
IFCSS-150	3 1/2 - 3 5/8	150	750	12 31/32	7 3/4	3 7/8	6 1/4	12 31/32	14	4	366
IFCSS-190	3 3/4 - 4	190	950	14 1/4	8 1/2	4 1/4	7	14	15	4 1/4	478
IFCSS-240	4 1/2	240	1200	15 15/16	9 1/4	4 29/32	7 15/32	16 23/32	18 3/32	4 23/32	745
IFCSS-280	5	290	1400	20 1/4	10 5/8	5 13/32	8 1/4	18 11/16	19 21/32	5 1/2	1276
IFCSS-400	5 1/2 - 6	400	2000	20 1/16	11 25/32	6 9/32	9 13/16	21 5/8	22 13/16	5 7/8	1442
IFCSS-500	6 1/2	500	2500	23 19/32	12 25/32	6 7/8	11 25/32	23 19/32	26 9/16	6 7/8	2344

Custom made sockets

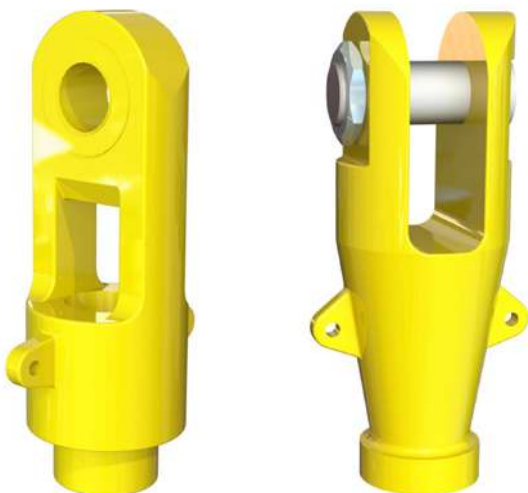

ANNEXES

Annex 1

CRANE GENERAL INFORMATION (EN13001-1, EN13001-2)	
CRANE PROPERTIES	
Crane Type	
Dispositive Hoisting Type	
Hoisting Device Type & Starting Method	
Maximum Constant Hoisting Speed (v _{h,max}) [m/s]	
Constant Hoisting Creep Speed (v _{h,CS}) [m/s]	
Maximum Translation Acceleration [m/s ²]	
Maximum Distribution Acceleration [m/s ²]	
Maximum Vertical (Drag) Acceleration [m/s ²]	
Drag Device Acceleration Force	
Articulation Type	
Tilting Resistance Factor for Balanced Rope Reeving (Ct)	
Maximum Deliberated Hook Suspension Inclination (β) [°]	
TEMPERATURE FACTORS	
Operation Temperature [°C]	
APPLICATION FACTORS	
Risk Factor (n _r)	
MASS FACTORS	
Mass of the rated hook load (m _{RC}) [kg]	
Total Hook Load with Release device (m _H) [kg]	
Maximum Hoisting Load [kg]	
WIND FACTORS	
Wind Range in Service	
European Wind Location	
Out of Service (OS) Wind Interval [R] [years]	
Maximum Load Height to the Surrounding Ground OS cond. (m)	
Load Percentage for Out of Service Condition (η _W)	
FATIGUE DESIGN FACTORS	
Fatigue Operation Temperature [°C]	
Mass of the Hook Load in a Lifting Cycle (m _i) [kg]	
Class Q Parameter	
Class U Parameter	
Average Number of accelerations per Cycle	
Total Number of Lifting Cycles	
ADDITIONAL LOAD OPTIONS	
LOAD RELEASE FACTORS	
Apply Fast Load Release?	
Load Release Speed	
Release Load Percentage [%]	
Load Release Device Mass [kg]	
TRANSLATION FACTORS	
Irregular Translation surface?	
Factor φ ₄ (EN13001-2)	
SNOW & ICE FACTORS	
Apply Snow and Ice Loads?	
Load Horizontal Area Projection (mm)	
Snow or Ice Build-up Thickness (mm)	
EARTHQUAKE FACTORS	
Apply Earthquake Loads?	
Maximum Vertical Acceleration due to Earthquake [m/s ²]	

Annex 2


DIN 15400 Drive Groups

This table specifies the drive group as a function of hook strength class and the lifting capacity as a function of hook number.

Strength class	DRIVE GROUP										Strength class
M	Hooks used in a drive group lower than 1B _m are not included here.										M
P			1B _m	1A _m	2 _m	3 _m	4 _m	5 _m	-	-	P
S		1B _m	1A _m	2 _m	3 _m	4 _m	5 _m	-	-	-	S
T		1B _m	1A _m	2 _m	3 _m	4 _m	-	-	-	-	T
V	1B _m	1A _m	2 _m	3 _m	4 _m	-	-	-	-	-	V
Hook Number	LIFTING CAPACITY, IN KG										Hook Number
006	320	250	200	160	125	100	-	-	-	-	006
010	500	400	320	250	200	160	125	100	-	-	010
012	630	500	400	320	250	200	160	125	100	-	012
020	1.000	800	630	500	400	320	250	200	160	125	020
025	1.250	1.000	800	630	500	400	320	250	200	160	025
04	2.000	1.600	1.250	1.000	800	630	500	400	320	250	04
05	2.500	2.000	1.600	1.250	1.000	800	630	500	400	320	05
08	4.000	3.200	2.500	2.000	1.600	1.250	1.000	800	630	500	08
1	5.000	4.000	3.200	2.500	2.000	1.600	1.250	1.000	800	630	1
1.6	8.000	6.300	5.000	4.000	3.200	2.500	2.000	1.600	1.250	1.000	1.6
2.5	12.500	10.000	8.000	6.300	5.000	4.000	3.200	2.500	2.000	1.600	2.5
4	20.000	16.000	12.500	10.000	8.000	6.300	5.000	4.000	3.200	2.500	4
5	25.000	20.000	16.000	12.500	10.000	8.000	6.300	5.000	4.000	3.200	5
6	32.000	25.000	20.000	16.000	12.500	10.000	8.000	6.300	5.000	4.000	6
8	40.000	32.000	25.000	20.000	16.000	12.500	10.000	8.000	6.300	5.000	8
10	50.000	40.000	32.000	25.000	20.000	16.000	12.500	10.000	8.000	6.300	10
12	63.000	50.000	40.000	32.000	25.000	20.000	16.000	12.500	10.000	8.000	12
16	80.000	63.000	50.000	40.000	32.000	25.000	20.000	16.000	12.500	10.000	16
20	100.000	80.000	63.000	50.000	40.000	32.000	25.000	20.000	16.000	12.500	20
25	125.000	100.000	80.000	63.000	50.000	40.000	32.000	25.000	20.000	16.000	25
32	160.000	125.000	100.000	80.000	63.000	50.000	40.000	32.000	25.000	20.000	32
40	200.000	160.000	125.000	100.000	80.000	63.000	50.000	40.000	32.000	25.000	40
50	250.000	200.000	160.000	125.000	100.000	80.000	63.000	50.000	40.000	32.000	50
63	320.000	250.000	200.000	160.000	125.000	100.000	80.000	63.000	50.000	40.000	63
80	400.000	320.000	250.000	200.000	160.000	125.000	100.000	80.000	63.000	50.000	80
100	500.000	400.000	320.000	250.000	200.000	160.000	125.000	100.000	80.000	63.000	100
125	630.000	500.000	400.000	320.000	250.000	200.000	160.000	125.000	100.000	80.000	125
160	800.000	630.000	500.000	400.000	320.000	250.000	200.000	160.000	125.000	100.000	160
200	1.000.000	800.000	630.000	500.000	400.000	320.000	250.000	200.000	160.000	125.000	200
250	1.250.000	1.000.000	800.000	630.000	500.000	400.000	320.000	250.000	200.000	160.000	250

Vocabulary & Abbreviations

t	Metric ton (1.000kg)
kg	Kilogram
No	Number
mm	Millimeters
WLL	Working Load Limit
SWL	Safety Working Load
COC	Certificate of Conformity
COO	Certificate of Origin
DAC	Design Approval Certificate
CSIC	Classification Society Inspection Certificate
EN	European Standard
EN13001	New European Standard for Cranes
EN13001-3-5:2016	New European Standard for Forged Crane Hooks
EN10204	Metallic products - Types of inspection documents (Material Certificate recognized in Europe)
3.1	EN10204-3.1 Original Manufacturer Material Certificate, with tests results (no 3 rd Party)
2.1	EN10204-2.1 Original Manufacturer Assembly Certificate
3.2	EN10204-3.2 Third Party Material Certificate, with tests results (witnessed by 3 rd Party)
ILO-3	Load Test Certificate recognized by International Labour Office
PTL	Proof Test Load
FAT	Factory Acceptance Test
MBL	Minimum Breaking Load
FEA	Finite Element Analysis
YS	Yield Strength
US	Ultimate Strength
FS	Fatigue Strength
PL	Proof Load by cold forming
DT	Destructive Test
NDT	Non Destructive Test
UT	Ultrasonic Test
MT	Magnetic Test
+QT	Quenched & Tempered (a kind of heat treatment)
+N	Normalizing (a kind of heat treatment)
R4	Alloy steel linked to chain materials
SF	Safety Factor (MBL/WLL)
DIN	Deutsches Institut für Normung
DIN15400	Old recognized European standard for crane shank hooks
CLASS P	Very low mechanical properties material (regularly carbon steel)
CLASS S	Low mechanical properties material (regularly low alloy steel)
CLASS T	Medium mechanical properties material (regularly medium alloy steel)
CLASS V	High mechanical properties material (regularly high alloy steel)
CLASS W	Very high mechanical properties material (regularly super alloy steel)

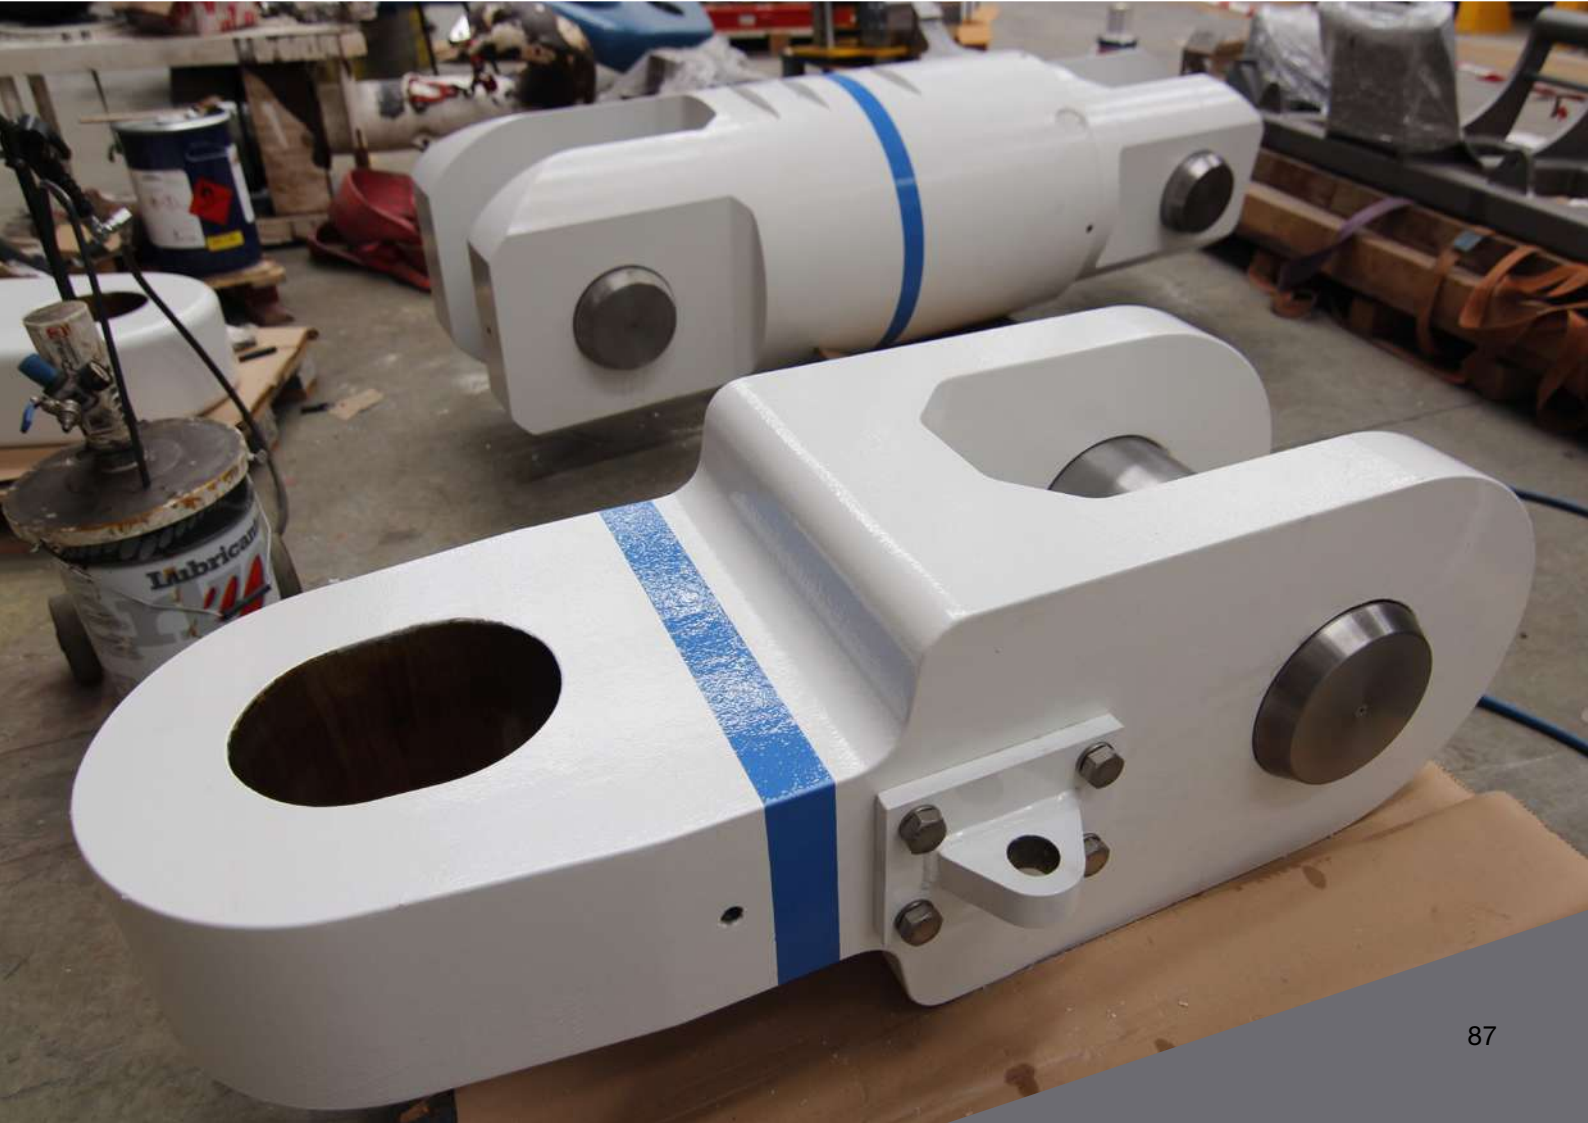

INDEX BY PRODUCT NAME

1. CRANE HOOKS

SINGLE FORGED HOOKS BASED ON DIN15401 DESIGN UNMACHINED.....	11
SINGLE FORGED HOOKS BASED ON DIN15401 DESIGN MACHINED FITTED WITH NUT	12
SINGLE FORGED HOOKS BASED ON DIN15401 DESIGN MACHINED FITTED WITH NUT	13
SINGLE FORGED HOOKS BASED ON BS2903:1980 DESIGN UNMACHINED.....	14
SINGLE FORGED HOOKS BASED ON DIN15401 DESIGN MACHINED FITTED WITH NUT, CROSSHEAD AND BEARING.....	15
RAMSHORN FORGED HOOKS BASED ON DIN15402 DESIGN UNMACHINED.....	16
SINGLE FORGED HOOKS BASED ON DIN15401 DESIGN MACHINED FITTED WITH NUT	17
RAMSHORN FORGED HOOKS BASED ON DIN15402 DESIGN MACHINED FITTED WITH NUT, CROSSHEAD AND BEARING.....	18
RAMSHORN FORGED HOOKS BASED ON BS3017:1958 UNMACHINED.....	19
RAMSHORN FORGED HOOKS BASED ON BS3017:1958 MACHINED FITTED WITH NUT, CROSSHEAD AND BEARING.....	20
RAMSHORN FORGED HOOKS BASED ON DIN15402-B DESIGN UNMACHINED	21
RAMSHORN FORGED HOOKS BASED ON DIN15402-B DESIGN MACHINED FITTED WITH NUT	22
RAMSHORN FORGED HOOKS BASED ON DIN15402-B DESIGN MACHINED FITTED WITH NUT, CROSSHEAD AND BEARING ..	23
QUAD FORGED HOOKS BASED ON DIN15402-C UNMACHINED	24
QUAD FORGED HOOKS BASED ON DIN15402-C MACHINED FITTED WITH NUT	25
QUAD FORGED HOOKS BASED ON DIN15402-C MACHINED FITTED WITH NUT, CROSSHEAD AND BEARING	26
SINGLE FORGED CARGO HOOKS BASED ON BS2903:1980 DESIGN	27
EYE FORGED SINGLE CHAIN HOOK BASED ON DIN7540 DESIGN.....	28
EYE FORGED SINGLE FIX HOOK BASED ON IRIZAR DESIGN.....	29
EYE FORGED SINGLE CARGO HOOK BASED ON DIN82017 DESIGN	30
EYE FORGED RAMSHORN FIX HOOK BASED ON IRIZAR DESIGN	31
EYE FORGED RAMSHORN B HOOK BASED ON IRIZAR DESIGN.....	32
EYE FORGED RAMSHORN FORK HOOK BASED ON DIN82019 DESIGN.....	33

2. CRANE BLOCKS

LIGHT DUTY BLOCKS ONE SHEAVE BLOCK.....	41
LIGHT DUTY BLOCKS TWO SHEAVES BLOCK	42
LIGHT DUTY BLOCKS THREE SHEAVES BLOCK.....	43
LIGHT DUTY BLOCKS FOUR SHEAVES BLOCK.....	44
MEDIUM DUTY BLOCKS FOUR SHEAVES BLOCK	45
MEDIUM DUTY BLOCKS SIX SHEAVES BLOCK.....	46
HEAVY DUTY BLOCKS TWO SHEAVES BLOCK.....	47
HEAVY DUTY BLOCKS FOUR SHEAVES BLOCK	48
OFFSHORE CRANE BLOCKS SINGLE SHEAVE BLOCK	49

3. SUBSEA HOOKS

FORGED ROV EYE HOOKS | LONG SHANK ROV EYE HOOK..... 53
 FORGED ROV EYE HOOKS | STANDARD SHANK ROV EYE HOOK 54
 ROV EYE FORGED SINGLE CHAIN HOOK BASED ON DIN7540 DESIGN 55
 FORGED ROV HOOKS | KS ROV EYE HOOK..... 56
 FORGED ROV HOOKS | SLING DEFENDER ROV EYE HOOK..... 57
 FORGED ROV HOOKS | LOAD TRANSFER ROV EYE HOOK 59

4. SHACKLES

HEAVY DUTY DEE FORGED SHACKLES..... 65
 HEAVY DUTY BOW FORGED SHACKLES 66
 SLING FORGED SHACKLES..... 67

5. SWIVELS


SWIVEL HOOKS..... 71
 SWIVEL | EYE-EYE..... 72
 SWIVEL | EYE-CLEVIS..... 73

6. CONNECTORS

CONNECTORS | HEAVY DUTY MASTER LINK 75
 CONNECTORS | STANDARD TRIPLATE 76

7. ROPE ACCESSORIES

METALLIC WELDED SHEAVES | ONE PLATE SHEAVE 79
 METALLIC WELDED SHEAVES | TWO PLATES SHEAVE..... 80
 METALLIC FREE OF WELD SHEAVES | SOLID SHEAVES 81

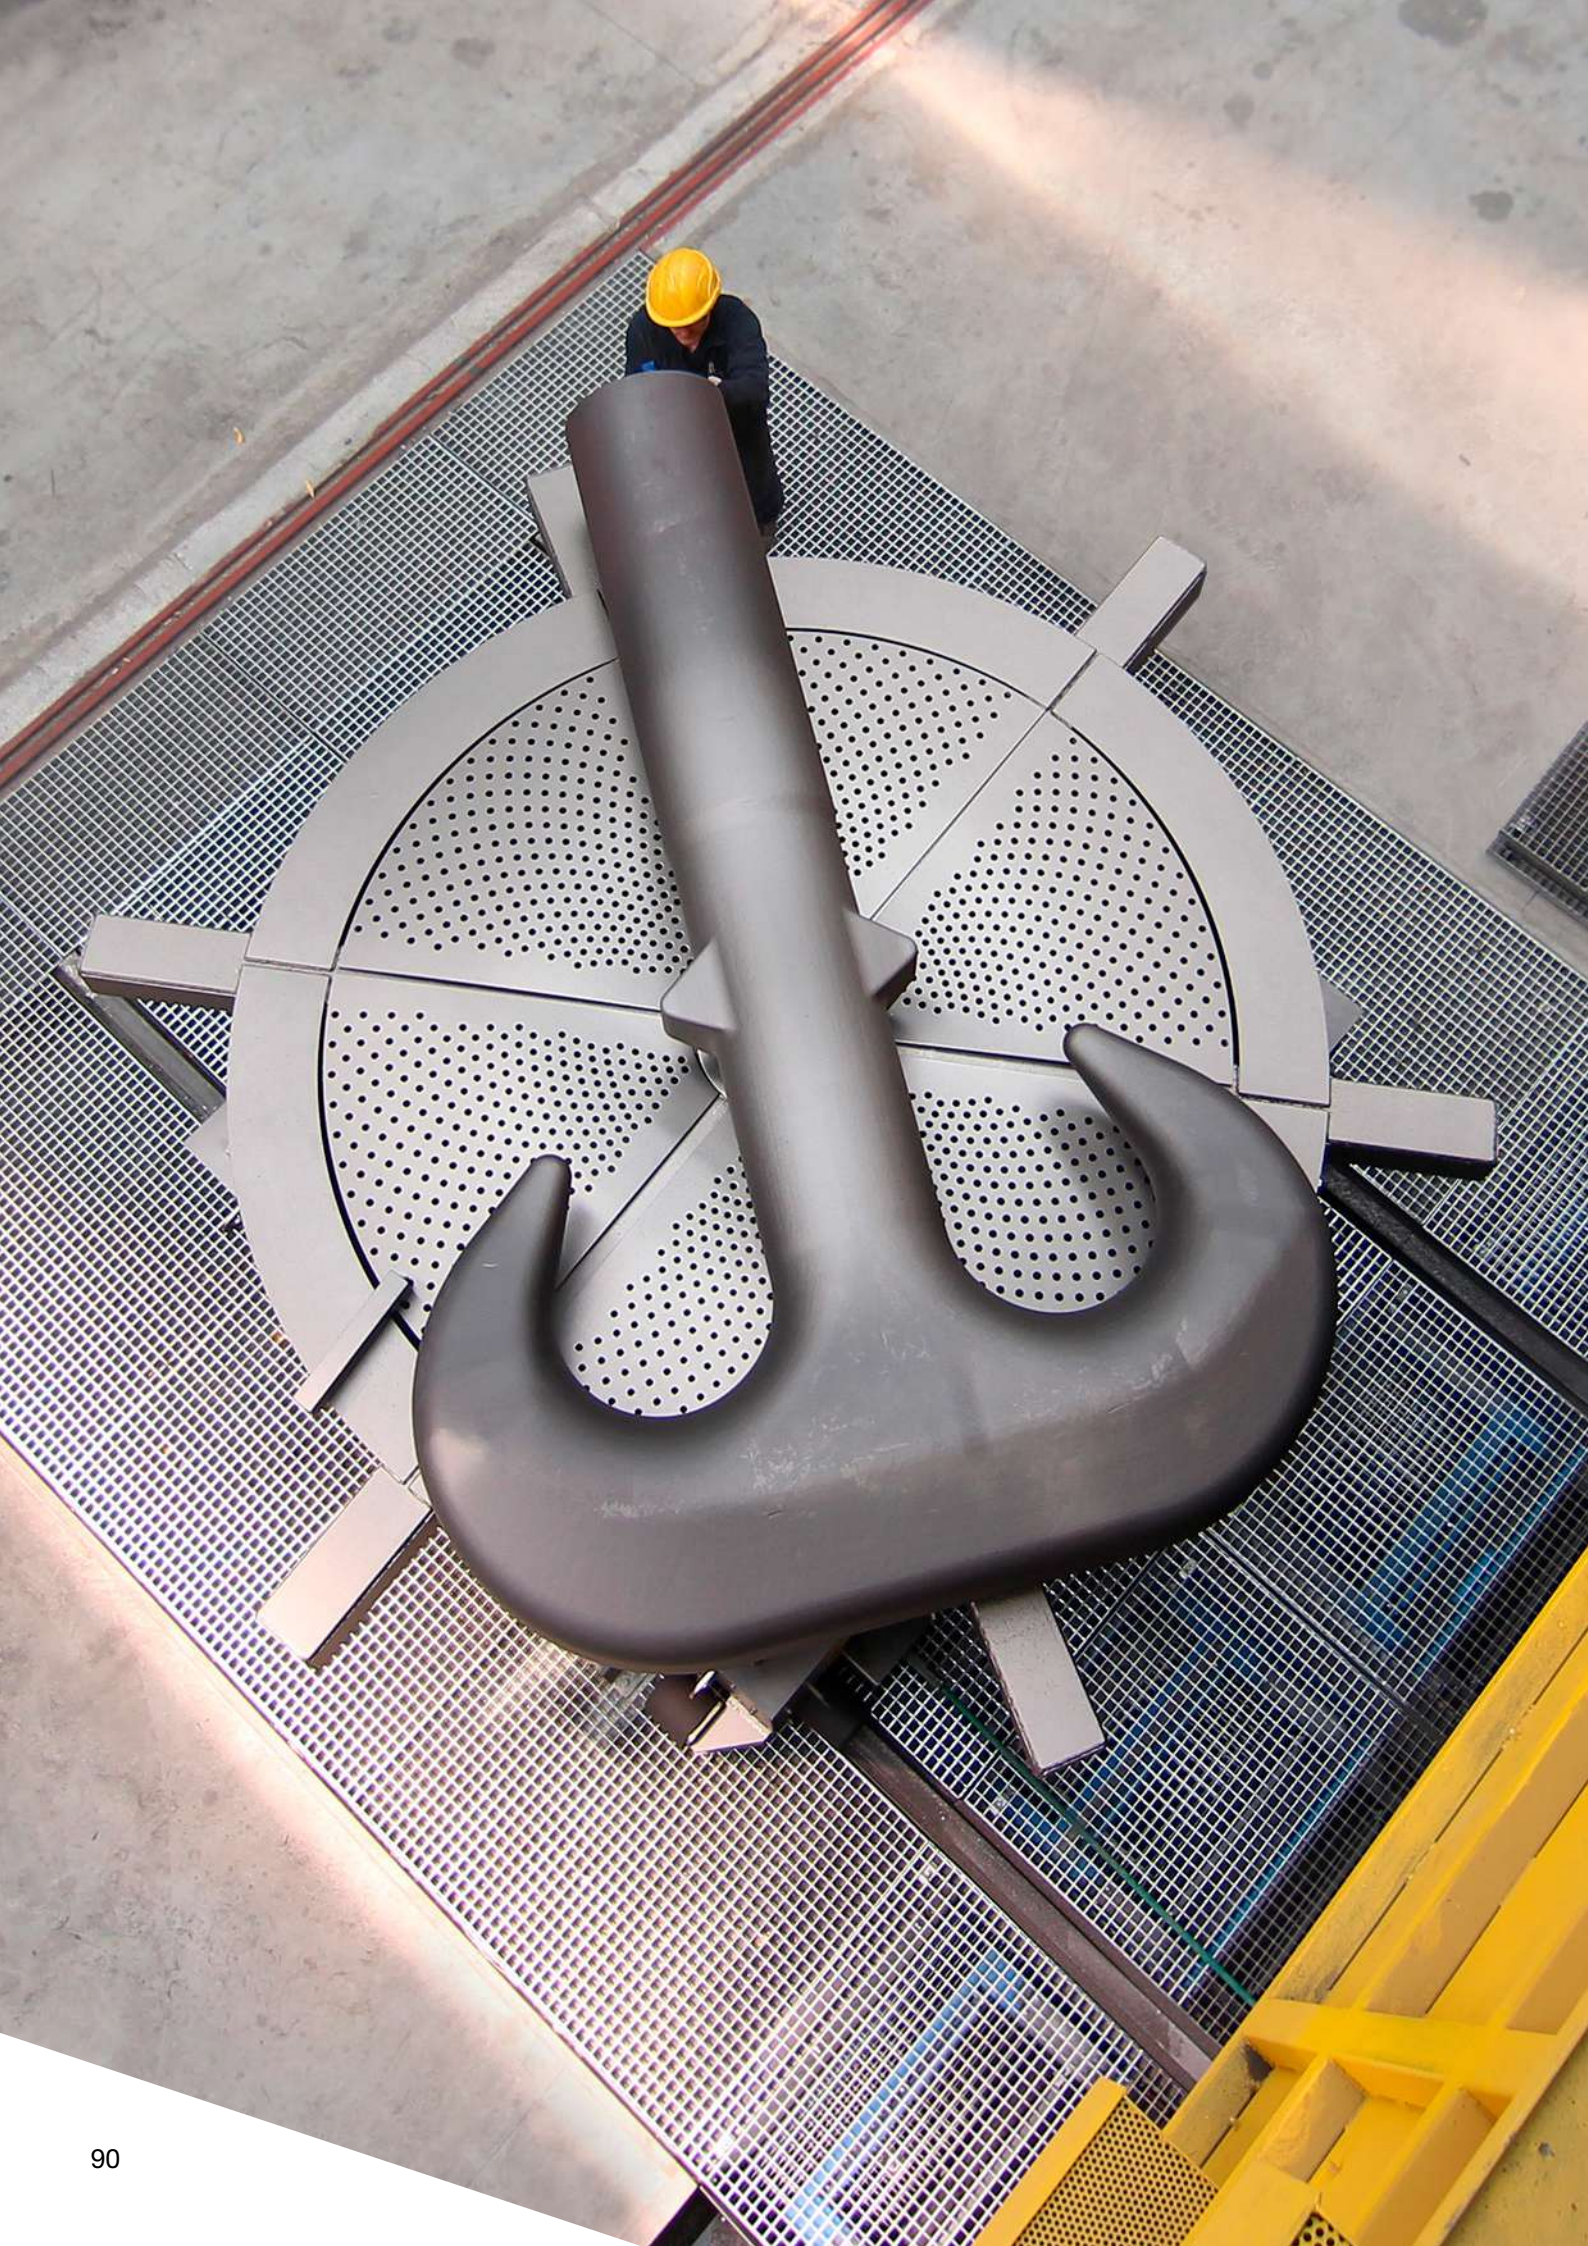





Irizar Forge Spain

Hiribarren 26
20210 Lazkao - Spain
+34 943 88 09 36

Irizar Forge USA

5615 W. Fuqua Building B
Houston TX 77085 - United States
+1 281 546 2099

Irizar Forge Brazil

Rua Alexandre Dumas, 1711, 5th Floor
Chácara Santo Antônio, São Paulo - Brazil
+55 (11) 2599 8364

irizar@irizarforge.com
irizarforge.com